


Color: ■ blue

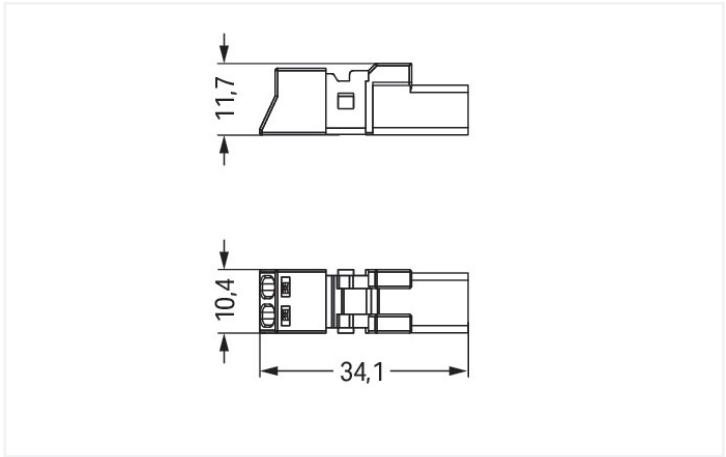

Dimensions in mm

Male connector/plug WINSTA® MINI rated current 16 A

The WINSTA® MINI male connector/plug with protection against mismatching supports rapid, correct installation. On PCBs, in control cabinets or for connecting lights – pluggable installation connectors from WAGO allow you to establish connections according to a huge variety of requirements in no time flat. The coding options reduce installation errors, allowing fast, secure wiring of all components. I coding in blue is used to identify WINSTA® MINI pluggable installation connectors, which are used predominantly in automation of buildings for controlling lighting. Thanks to its particularly compact dimensions, our WINSTA® MINI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology is specifically suitable in very tight spaces, i.e., for installations when very little room is available.

WINSTA® MINI solutions for your electrical installation – protected against mismatching and maintenance-free

WINSTA® is the pluggable connection system that is ideally tailored to the strict requirements of electrical installation. It allows fast, secure and, above all, error-free installation of components and cables. Now you can also lower installation costs without compromising safety and quality: with protection type IP20 reduces the need for servicing and prevents unnecessary downtime.

- protection against mismatching eliminates errors
- compact design for conductors with a cross-section up to 1.5 mm²
- with I coding for controlling light (DALI standard)
- custom-engineered solutions
- convenient installation and commissioning

Electrical data				
Ratings per		IEC/EN 60664-1		
Overvoltage category		III	III	II
Pollution degree		3	2	2
Nominal voltage		250 V	-	-
Rated surge voltage		4 kV	-	-
Rated current		16 A	-	-
Approvals per		UL 1977		
Rated voltage		600 V		
Rated current		14 A		
General information				
Note on contact resistance		approx. 1 mΩ of contact resistance approx. 0.25 mΩ contact transition plug/ socket		

## Connection data

Clamping units	2	<b>Connection 1</b>	
Total number of potentials	2	Connection technology	Push-in CAGE CLAMP®
		Actuation type	Operating tool Push-in
		Nominal cross-section	1.5 mm² / 16 AWG
		Solid conductor	0.25 ... 1.5 mm² / 22 ... 16 AWG
		Solid conductor; push-in termination	0.75 ... 1.5 mm² / 20 ... 16 AWG
		Stranded conductor	0.25 ... 1 mm² / 22 ... 18 AWG
		Fine-stranded conductor	0.25 ... 1.5 mm² / 22 ... 16 AWG
		Fine-stranded conductor; with insulated ferrule	0.25 ... 0.75 mm² / 22 ... 20 AWG
		Fine-stranded conductor; with uninsulated ferrule	0.25 ... 0.75 mm² / 22 ... 20 AWG
		Fine-stranded conductor; with ferrule; push-in termination	0.75 mm² / 20 AWG
		Strip length	9 mm / 0.35 inches
		Pole number	2
		Conductor entry direction to mating direction	0°

## Physical data

Pin spacing	4.4 mm / 0.173 inches
Width	10.4 mm / 0.409 inches
Height	11.7 mm / 0.461 inches
Depth	34.1 mm / 1.343 inches

## Mechanical data

Use	DALI, Lighting Management
Coding	I
Variable coding	No
Marking	- +
Potential marking	- +
Mating force of a plug-in connection	approx. 20 ... 70 N (depending on pole number)
Retention force of a plug-in connection	Locked: > 80 N
Unmating force of a plug-in connection	Unlocked: approx. 20 ... 70 N (depending on pole number)
Number of mating cycles	200, without resistive load
Protection type	IP20; IP40 when mated with strain relief housing

## Plug-in connection

Contact type (pluggable connector)	Male connector/plug
Connector (connection type)	for conductor
Mismating protection	Yes
Note on mismating protection	All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180° c.) plugging while laterally staggered d.) plugging one pole
Locking lever	Can be retrofitted
Locking of plug-in connection	Locking lever
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).



Material data		
Note (material data)		<a href="#">Information on material specifications can be found here</a>
Color		blue
Cover color		gray
Material group		I
Insulation material (main housing)		Polyamide (PA66)
Flammability class per UL94		V0
Clamping spring material		Chrome-nickel spring steel (CrNi)
Contact material		Copper or copper alloy; surface-treated
Contact Plating		Tin
Fire load		0.08 MJ
Weight		2.5 g



Environmental requirements		
Processing temperature		-5 ... +40 °C
Continuous operating temperature		-35 ... +85 °C
Note on continuous operating temperature		Insulating parts for temperatures ≤ 105 °C

Commercial data		
Product Group		20 (Winsta)
PU (SPU)		50 pcs
Packaging type		Box
Country of origin		PL
GTIN		4055143548502
Customs tariff number		85366990990

Product classification		
UNSPSC		39121402
eCl@ss 10.0		27-44-06-05
eCl@ss 9.0		27-44-06-05
ETIM 9.0		EC002560
ETIM 8.0		EC002560
ECCN		NO US CLASSIFICATION

Environmental Product Compliance		
RoHS Compliance Status		Compliant, No Exemption

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
 			Approval	Standard	Certificate Name
Approval	Standard	Certificate Name	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
CCA DEKRA Certification B.V.	EN 61535	71-123231	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
CCA DEKRA Certification B.V.	IEC 61535	NL-85020			
cURus Underwriters Laboratories Inc.	UL 1977	E45171			



Approvals for marine applications



Approval	Standard	Certificate Name
ABS American Bureau of Ship- ping	Steel Vessel Rules	19-HG1869855-PDA
DNV GL Det Norske Veritas, Ger- manischer Lloyd	-	TAE00001Z6
LR Lloyds Register	EN 61535	08/20047 (E2)

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 890-1112



Documentation

Bid Text			
890-1112	19.02.2019	xml 2.95 KB	
890-1112	08.06.2015	doc 23.00 KB	

CAD/CAE-Data

CAD data
2D/3D Models 890-1112



CAE data
EPLAN Data Portal 890-1112
WSCAD Universe 890-1112
ZUKEN Portal 890-1112



1 Compatible Products

1.1 System counterpart

1.1.1 Cable assembly



[Item No.: 891-8982/106-101](#)  
pre-assembled connecting cable; Eca;  
Socket/open-ended; 2-pole; Cod. I;  
H05VV-F 2 x 1.5 mm²; 1 m; 1,50 mm²; blue

[Item No.: 891-8982/006-101](#)  
pre-assembled interconnecting cable;  
Eca; Socket/plug; 2-pole; Cod. I; H05VV-F  
2 x 1.5 mm²; 1 m; 1,50 mm²; blue



1.1.2 Distribution box



**Item No.: 899-681/146-000**  
Distribution box; 230 V + DALI; 1 input; 7 outputs; Cod. I; MINI, MID; white



**Item No.: 899-631/181-000**  
Distribution box; 230 V + DALI; 2 inputs; 6 outputs; Cod. A, I; MINI, MID; black



**Item No.: 899-631/455-000**  
Distribution box; 400 V + DALI; 2 inputs; 5 outputs; Cod. A, I; MINI, MID; black



**Item No.: 899-681/147-000**  
Distribution box; 400 V + DALI; 2 inputs; 5 outputs; Cod. A, I; MINI, MID; white

1.1.3 Distribution connector



**Item No.: 890-1904**  
3-way distribution connector; 2-pole; Cod. I; 1 input; 3 outputs; blue



**Item No.: 890-1907**  
5-way distribution connector; 2-pole; Cod. I; 1 input; 5 outputs; blue



**Item No.: 890-1617**  
T-distribution connector; 2-pole; Cod. I; 1 input; 2 outputs; 2 locking levers; blue



**Item No.: 890-1620**  
T-distribution connector; 2-pole; Cod. I; 1 input; 2 outputs; 3 locking levers; for flying leads; blue

1.1.4 Female connector/socket



**Item No.: 890-2102**  
Snap-in socket; 2-pole; Cod. I; 1,50 mm<sup>2</sup>; blue



**Item No.: 890-3102/011-000**  
Socket for PCBs; angled; 2-pole; Cod. I; blue



**Item No.: 890-3102**  
Socket for PCBs; straight; 2-pole; Cod. I; blue



**Item No.: 890-1102**  
Socket; 2-pole; Cod. I; 1,50 mm<sup>2</sup>; blue

1.2 Required Accessories

1.2.1 Locking system

1.2.1.1 Locking system



**Item No.: 890-111**  
Locking lever; for flying leads; for tool operation; black



**Item No.: 890-131**  
Locking lever; for flying leads; for tool operation; white



**Item No.: 890-101**  
Locking lever; for manual operation; black



**Item No.: 890-121**  
Locking lever; for manual operation; white

1.2.2 Strain relief

1.2.2.1 Strain relief housing



**Item No.: 890-502/342-000**  
Strain relief housing; 2-pole; with locking clip; for 1 cable; 3.8 ... 8.2 mm; 17.5 mm; black



**Item No.: 890-512/342-000**  
Strain relief housing; 2-pole; with locking clip; for 1 cable; 3.8 ... 8.2 mm; 17.5 mm; white



**Item No.: 890-502**  
Strain relief housing; 2-pole; with locking clip; for 1 cable; 3.8 ... 8.2 mm; 30 mm; black



**Item No.: 890-512**  
Strain relief housing; 2-pole; with locking clip; for 1 cable; 3.8 ... 8.2 mm; 30 mm; white

1.3 Optional Accessories

1.3.1 Cover

1.3.1.1 Cover



**Item No.: 897-2001**  
Protective cap; Type1; for sockets and plugs; PVC; red

1.3.2 Installation

1.3.2.1 Mounting accessories



**Item No.: 890-310**  
Mounting carrier; 2- to 5-pole; for flying leads; black



**Item No.: 890-311**  
Mounting carrier; 2- to 5-pole; for flying leads; white

1.3.3 Tool

1.3.3.1 Operating tool




**Item No.: 890-382**  
Operating tool; 2-way; green




**Item No.: 210-719**  
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

Installation Notes


Conductor termination




1. Strip length, outer insulation = 30 mm (2-pole), 37 mm (3-pole), 45 mm (4- and 5-pole)
2. Strip length = 9 mm
3. Extended ground conductor = 8 mm



To terminate fine-stranded conductors, open the clamping unit via screwdriver – 2.5 mm blade width – and insert a stripped conductor until it hits the backstop. Terminate solid conductors by simply pushing them in.



To terminate fine-stranded conductors, open clamping units via operating tool (890-382) and insert stripped conductors until they hit backstop. Terminate solid conductors by simply pushing them in.



To terminate fine-stranded conductors, open clamping units via operating tool (890-383) and insert stripped conductors until they hit backstop. Terminate solid conductors by simply pushing them in.

Installation




Latch the wired connector into the base of the strain relief housing.



Push down strain relief clamp by hand.



Push down strain relief clamp with 2.5 mm screwdriver alternately on both sides.



Latch the top of the strain relief housing.



The printed marking of the connector is clearly visible in the openings of the strain relief housing.