


Delivered without miniature WSB markers



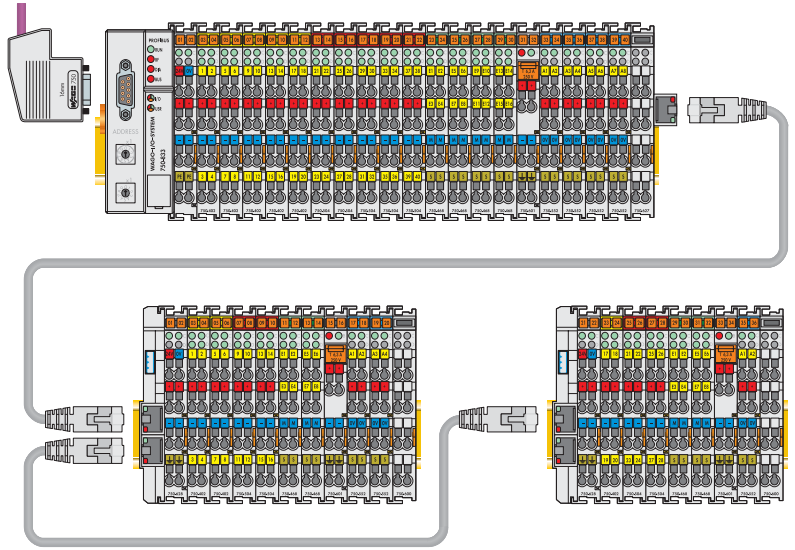

The coupler module for the internal data bus extension module 750-628 replaces the fieldbus coupler/controller at an I/O terminal block. It is also the mating piece for the end module 750-627. Plug the connecting cable into the top RJ-45 socket to establish the logical link to the fieldbus coupler/controller via end module 750-627. The extension is completely transparent for the fieldbus coupler/controller. All of the functions of the I/O module system are retained without any changes. A further extension to the system is provided by the bottom RJ-45 socket. This enables the entire system to be extended by 10 stages.

The supply voltage for the field side and the internal electronics can be input separately. Both levels are electrically isolated from each other. Two diagnostic LEDs give information about the supply voltage for both the internal and field side. Two LEDs in the input socket indicate fault-free communication with the bus coupler. The extension module can be used as the last coupler module in the system (switch on matching resistor) or as a bridge between two I/O module assemblies.

Installation note Attention:

To ensure safe, reliable operating states when using the internal data bus extension 750-627/-628 these states must be registered prior to startup with the following couplers or PLCs (refer to manual for supported couplers/PLCs). You must use the "WAGO Extension Setting" software for this (download: www.wago.com). Please note that only one terminating resistor may be activated in the whole system. Please complete the manufacturing number matrix on the right-hand side of the couplers when updating the firmware and internal operating parameters.

Description	Item No.	Pack. Unit
Internal Data Bus Extension Coupler Module	750-628	1
Accessories		
Miniature WSB Quick marking system		
 plain	248-501	5
with marking	see Section 11	
Approvals		
Conformity marking	CE	
Korea Certification		
Marine applications	BV, GL	
UL 508	UL 508	
DEKRA 11 ATEX 0203 X	II 3 G Ex nA II T4	

Technical Data	
Max. no. of I/O modules	64 (in the whole system)
Buscoupler connection	2 x RJ-45 socket (input + output)
Distance	5 m (10 m see manual), (end module and coupler or coupler and coupler)
Transmission medium	shielded copper wire (ETHERNET patch cable) 4 x 2 x 0.25 mm ² , twisted pair, double shielding
Power supply	24 V DC (-15 % ... +20 %)
Max. input current (24 V)	200 mA
Power supply efficiency	76 %
Inrush current	2.5 x continuous current
Internal current consumption (5 V)	150 mA
Total current for I/O modules (5 V)	400 mA
Voltage via power jumper contacts	24 V DC (-15 % ... +20 %)
Current via power jumper contacts (max.)	10 A DC
Isolation	500 V system/supply
Wire connection	CAGE CLAMP [®]
Cross sections	0.08 mm ² ... 2.5 mm ² / AWG 28 ... 14
Strip lengths	8 ... 9 mm / 0.33 in
Width	25 mm
Weight	75.2 g
EMC immunity of interference	acc. to EN 61000-6-2, marine applications
EMC emission of interference	acc. to EN 61000-6-4, marine applications