


16-Channel Digital Output Module 24 V DC

High-side switching



Delivered without miniature WSB markers

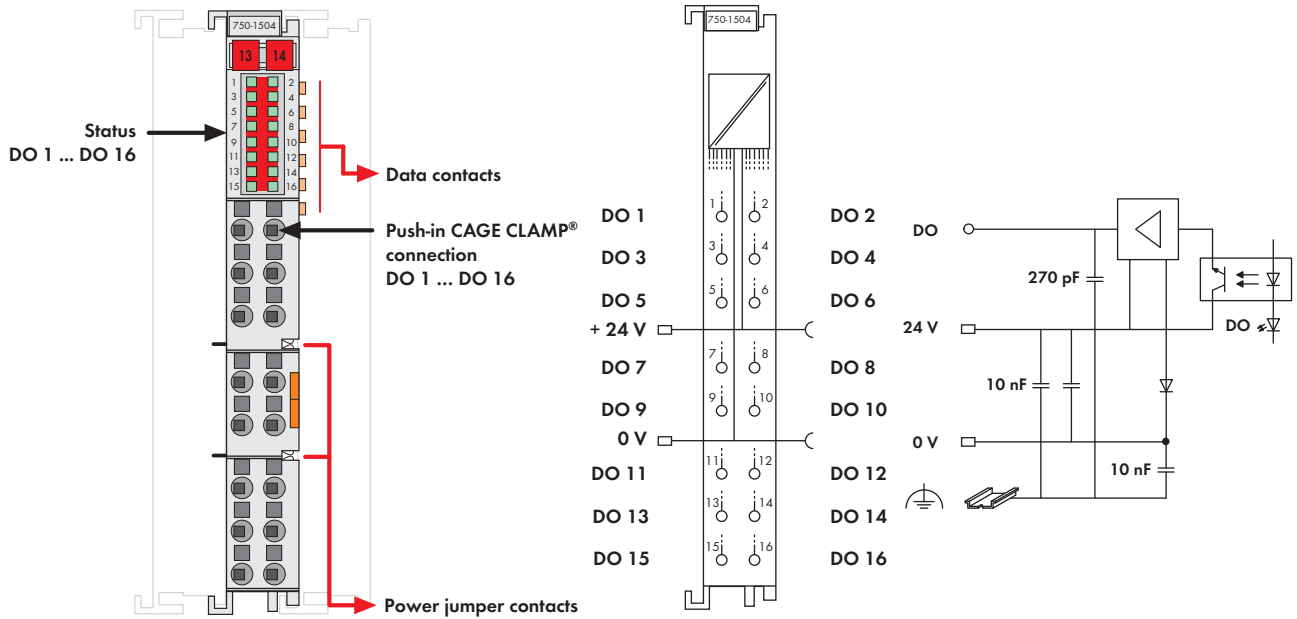




The digital output module provides 16 channels at a width of just 12mm (0.47in.).

An optocoupler provides electrical isolation between the bus and the field side.

It transmits binary control signals from the automation device to connected actuators (e.g., magnetic valves, contactors, transmitters, relays or other electrical loads).

The module has Push-in CAGE CLAMP® connections enabling solid conductors to be inserted directly.

A green LED indicates the switched status of each channel.

Description	Item No.	Pack. Unit
16DO 24V DC 0.5A	750-1504	1
Interference-free for use in safety functions (see manual)		
Accessories	Item No.	Pack. Unit
Miniature WSB Quick marking system		
 plain	248-501	5
with marking	see Section 11	
Operating tool, with partially insulated shaft, type 1, blade (2.5 x 0.4) mm	210-719	50
Approvals		
Conformity marking	CE	
Korea Certification		
Marine applications	ABS, BV, DNV, GL, KR, LR, NKK, PRS, RINA	
 UL 508		
 ANSI/ISA 12.12.01	Class I, Div. 2, Grp. ABCD, T4	
 TÜV 07 ATEX 554086 X	I M2 Ex d I Mb, II 3 G Ex nA IIC T4 Gc, II 3 D Ex tc IIIC T135°C Dc	
IECEX TUN 09.0001 X	Ex d I Mb, Ex nA IIC T4 Gc, Ex tc IIIC T135°C Dc	

Technical Data	
No. of outputs	16
Max. current consumption (internal)	40 mA
Voltage via power jumper contacts	24 V DC (-25 % ... +30 %)
Type of load	resistive, inductive, lamps
Max. switching frequency	1 kHz
Output current (max.)	0.5 A, short-circuit protected
Current consumption typ. (field side)	29mA
Isolation	500 V system/field
Wire connection	Push-in CAGE CLAMP®
Cross sections	solid: 0.08 mm ² ... 1.5 mm ² / AWG 28 ... 16 fine-stranded: 0.25 mm ² ... 1.5 mm ² / AWG 22 ... 16
Strip lengths	8 ... 9 mm / 0.33 in
Width	12 mm
Weight	63.7 g
EMC immunity of interference	acc. to EN 61000-6-2, marine applications
EMC emission of interference	acc. to EN 61000-6-3, marine applications