

X20TBS2

Data sheet
1.02 (August 2025)



Publishing information

B&R Industrial Automation GmbH

B&R Strasse 1

5142 Eggelsberg

Austria

Telephone: +43 7748 6586-0

Fax: +43 7748 6586-26

office@br-automation.com

Disclaimer

All information in this document is current as of its creation. The contents of this document are subject to change without notice. B&R Industrial Automation GmbH assumes unlimited liability in particular for technical or editorial errors in this document only (i) in the event of gross negligence or (ii) for culpably inflicted personal injury. Beyond that, liability is excluded to the extent permitted by law. Liability in cases in which the law stipulates mandatory unlimited liability (such as product liability) remains unaffected. Liability for indirect damage, consequential damage, business interruption, loss of profit or loss of information and data is excluded, in particular for damage that is directly or indirectly attributable to the delivery, performance and use of this material.

B&R Industrial Automation GmbH notes that the software and hardware designations and brand names of the respective companies used in this document are subject to general trademark, brand or patent protection.

Hardware and software from third-party suppliers referenced in this document is subject exclusively to the respective terms of use of these third-party providers. B&R Industrial Automation GmbH assumes no liability in this regard. Any recommendations made by B&R Industrial Automation GmbH are not contractual content, but merely non-binding information for which no liability is assumed. When using hardware and software from third-party suppliers, the relevant user documentation of these third-party suppliers must additionally be consulted and, in particular, the safety guidelines and technical specifications contained therein must be observed. The compatibility of the products from B&R Industrial Automation GmbH described in this document with hardware and software from third-party suppliers is not contractual content unless this has been separately agreed in individual cases; in this respect, warranty for such compatibility is excluded in any case, and it is the sole responsibility of the customer to verify this compatibility in advance.

1720314643970-1.02

1 General information

1.1 Order data


Order number	Short description	Figure
	Terminal blocks	
X20TBS2	Terminal block set for X20 I/O module: 8x 4-pin terminal block	

Table 1: X20TBS2 - Order data

1.2 Description

This 4-pin terminal block is used to connect to various B&R modules. The set contains 8 terminal blocks.

2 Technical description

2.1 Technical data


Order number	X20TBS2
General information	
Certifications	
CE	Yes
UKCA	Yes
Terminal block	
Number of pins	4
Type of terminal block	Design as push-in terminal block with actuating element
Push-in force per contact	Max. 3.5 N
Cable type	Only copper wires (no aluminum wires!)
Pitch	3.5 mm
Wire stripping length	10 mm
Connection cross section ¹⁾	
AWG wire	30 to 16 AWG
Wire end sleeves with plastic covering	0.14 to 1.00 mm ²
Single-wire	0.14 to 1.50 mm ²
Fine-stranded wires	0.14 to 1.50 mm ²
With wire end sleeve	0.14 to 1.50 mm ²
Electrical properties	
Nominal voltage	IEC: 320 V UL: 300 V
Nominal current ²⁾	IEC: 10 A / contact UL: 9.5 A / contact
Contact resistance	≤5 mΩ
Ambient conditions ³⁾	
Temperature	
Operation	-50 to 120°C
Relative humidity	
Operation	5 to 95%, non-condensing

Table 2: X20TBS2 - Technical data

- 1) Use a screwdriver with a blade of 0.4 x 2.5 mm.
- 2) The respective limit data of the I/O modules must be taken into account!
- 3) Identical for operation, storage and transport.

2.2 Dimensions

The terminal block has the following dimensions:

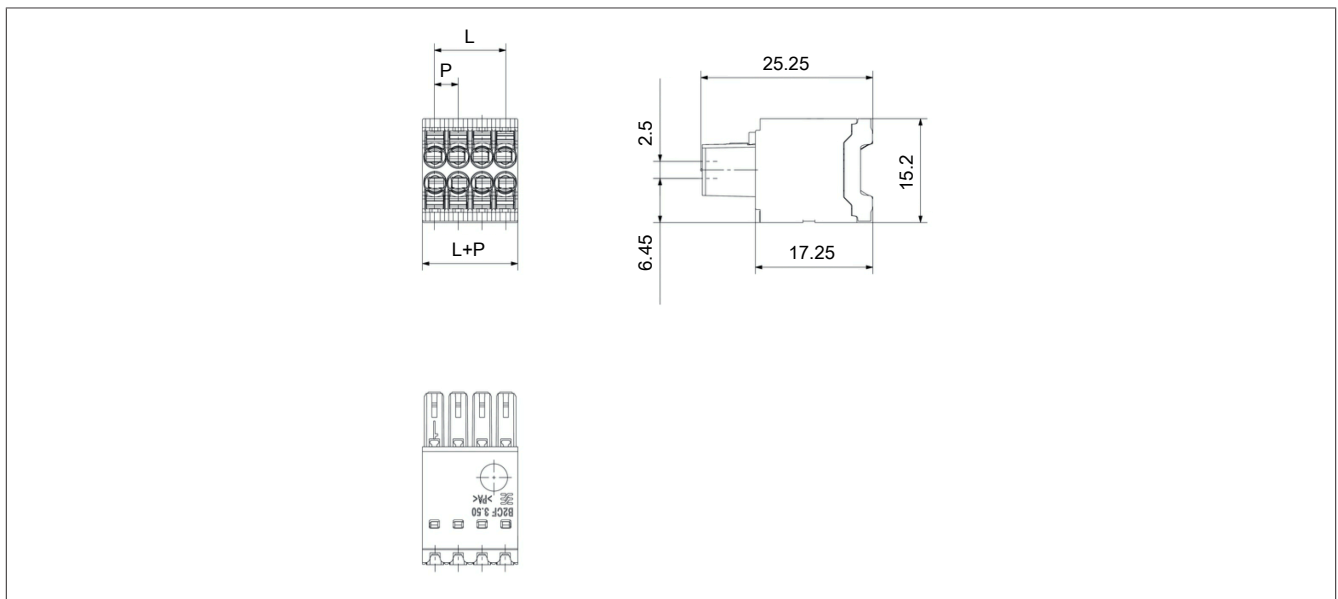

$L = 3.5 \text{ mm}$

$P = 3.5 \text{ mm}$