



## Main

Range of product	Altistart 01
Product or component type	Soft starter
Product destination	Asynchronous motors
Product specific application	Simple machine
Device short name	ATS01
Network number of phases	3 phases
[Us] rated supply voltage	380...415 V (- 10...10 %)
Motor power kW	7.5 kW at 380...415 V 3 phases 11 kW at 380...415 V 3 phases
IcL starter rating	22 A
Utilisation category	AC-53B conforming to EN/IEC 60947-4-2
Current consumption	110 A at nominal load
Type of start	Start with voltage ramp
Power dissipation in W	124.5 W in transient state 4.5 W at full load and at end of starting

## Complementary

Assembly style	With heat sink
Function available	Integrated bypass
Supply voltage limits	342...456 V
Supply frequency	50...60 Hz (- 5...5 %)
Network frequency	47.5...63 Hz
Output voltage	<= power supply voltage
Control circuit voltage	Built into the starter
Starting time	1 s / 100 start(s) per hour 5 s / 20 start(s) per hour 10 s / 10 start(s) per hour Adjustable from 1 to 10 s
Deceleration time symb	Adjustable from 1 to 10 s

Starting torque	30...80 % of starting torque of motor connected directly on the line supply
Discrete input type	(LI1, LI2, BOOST) stop, run and boost on start-up functions logic $\leq 8$ mA 27 kOhm
Discrete input voltage	24...40 V
Discrete input logic	(LI1, LI2, BOOST) positive state $0 < 5$ V and $< 0.2$ mA, state 1 $> 13$ V and $> 0.5$ mA
Discrete output current	2 A DC-13 3 A AC-15
Discrete output type	(LO1) open collector logic end of starting signal (R1A, R1C) relay outputs NO
Discrete output voltage	24 V (6...30 V) open collector logic
Minimum switching current	Relay outputs 10 mA 6 V DC
Maximum switching current	Relay outputs 2 A 30 V DC inductive load, $\cos \phi = 0.5$ L/R = 20 ms Relay outputs 2 A 250 V AC inductive load, $\cos \phi = 0.5$ L/R = 20 ms
Display type	1 LED (yellow) for nominal voltage reached 1 LED (green) for starter powered up
Tightening torque	0.5 N.m 1.9...2.5 N.m
Electrical connection	2 conductor(s) flexible cable without cable end, connection via screw connector 0.5...1.5 mm <sup>2</sup> / AWG 16 for control circuit 2 conductor(s) rigid cable, connection via screw connector 0.5...1 mm <sup>2</sup> / AWG 17 for control circuit 1 conductor(s) rigid cable, connection via screw connector 0.5...2.5 mm <sup>2</sup> / AWG 14 for control circuit 1 conductor(s) flexible cable without cable end, connection via screw connector 0.5...2.5 mm <sup>2</sup> / AWG 14 for control circuit 2 conductor(s) flexible cable without cable end, connection via 4 mm screw clamp terminal 1.5...6 mm <sup>2</sup> / AWG 10 for power circuit 1 conductor(s) rigid cable, connection via 4 mm screw clamp terminal 1...10 mm <sup>2</sup> / AWG 8 for power circuit 1 conductor(s) flexible cable with cable end, connection via screw connector 0.5...1.5 mm <sup>2</sup> / AWG 16 for control circuit 2 conductor(s) rigid cable, connection via 4 mm screw clamp terminal 1...6 mm <sup>2</sup> / AWG 10 for power circuit 2 conductor(s) flexible cable with cable end, connection via 4 mm screw clamp terminal 1...6 mm <sup>2</sup> / AWG 10 for power circuit 1 conductor(s) flexible cable without cable end, connection via 4 mm screw clamp terminal 1.5...10 mm <sup>2</sup> / AWG 8 for power circuit
Marking	CE
Operating position	Vertical +/- 10 degree
Height	154 mm
Width	45 mm
Depth	131 mm
Product weight	0.56 kg
Compatibility code	ATS01N2

## Environment

Electromagnetic compatibility	Voltage/Current impulse conforming to IEC 61000-4-5 level 3 Conducted and radiated emissions conforming to IEC 60947-4-2 level B EMC immunity conforming to EN 50082-1 Micro-cuts and voltage fluctuation conforming to IEC 61000-4-11 Harmonics conforming to IEC 1000-3-4 Immunity to conducted interference caused by radio-electrical fields conforming to IEC 61000-4-6 level 3 Immunity to electrical transients conforming to IEC 61000-4-4 level 4 Damped oscillating waves conforming to IEC 61000-4-12 level 3 Harmonics conforming to IEC 1000-3-2 Electrostatic discharge conforming to IEC 61000-4-2 level 3 Immunity to radiated radio-electrical interference conforming to IEC 61000-4-3 level 3 EMC immunity conforming to EN 50082-2 Conducted and radiated emissions conforming to CISPR 11 level B
Standards	EN/IEC 60947-4-2
Product certifications	GOST CSA CCC C-Tick UL B44.1-96/ASME A17.5 for starter wired to the motor delta terminal
IP degree of protection	IP20


Pollution degree	2 conforming to EN/IEC 60947-4-2
Vibration resistance	1 gn (f = 13...150 Hz) conforming to EN/IEC 60068-2-6 1.5 mm peak to peak (f = 3...13 Hz) conforming to EN/IEC 60068-2-6
Shock resistance	15 gn for 11 ms conforming to EN/IEC 60068-2-27
Relative humidity	5...95 % without condensation or dripping water conforming to EN/IEC 60068-2-3
Ambient air temperature for operation	-10...40 °C without derating 40...50 °C with current derating of 2 % per °C
Ambient air temperature for storage	-25...70 °C conforming to EN/IEC 60947-4-2
Operating altitude	<= 1000 m without derating > 1000 m with current derating of 2.2 % per additional 100 m

### Contractual warranty


Warranty period	18 months
-----------------	-----------

## Dimensions

### Mounting on Symetrical (35 mm) Rail

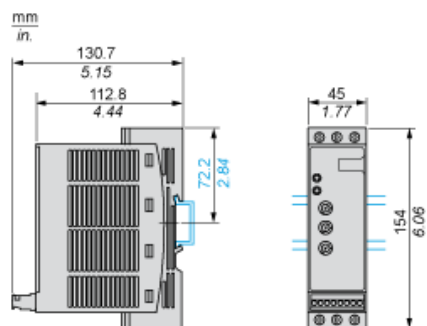


### Screw Fixing

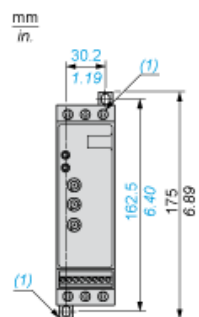

(1) Retractable fixings

## Example of Manual Control

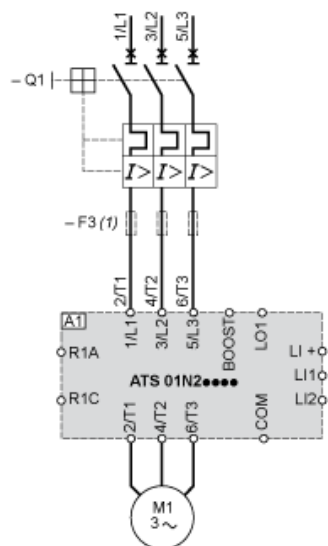


A1 : Soft start/soft stop unit  
(1) For type 2 coordination  
Q1 : Motor circuit-breaker  
F3 : 3 fast-acting fuses

Function Diagram

2-wire Control with Deceleration

Us : Power supply voltage  
LED 1 Green LED  
LI2 : Logic input  
R1 : Relay output  
LO1 : Logic output  
LED 2 Yellow LED

3-wire Control with Deceleration

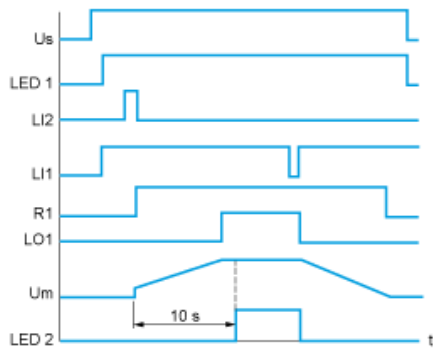

Us : Power supply voltage  
LED 1 Green LED  
LI2, LI1 Logic inputs  
R1 : Relay output  
LO1 : Logic output  
Um : Motor voltage  
LED 2 Yellow LED