



# PROFINET IO advanced Fieldbus Coupler



2-port switch; 100 Mbit/s; digital, analog and complex signals

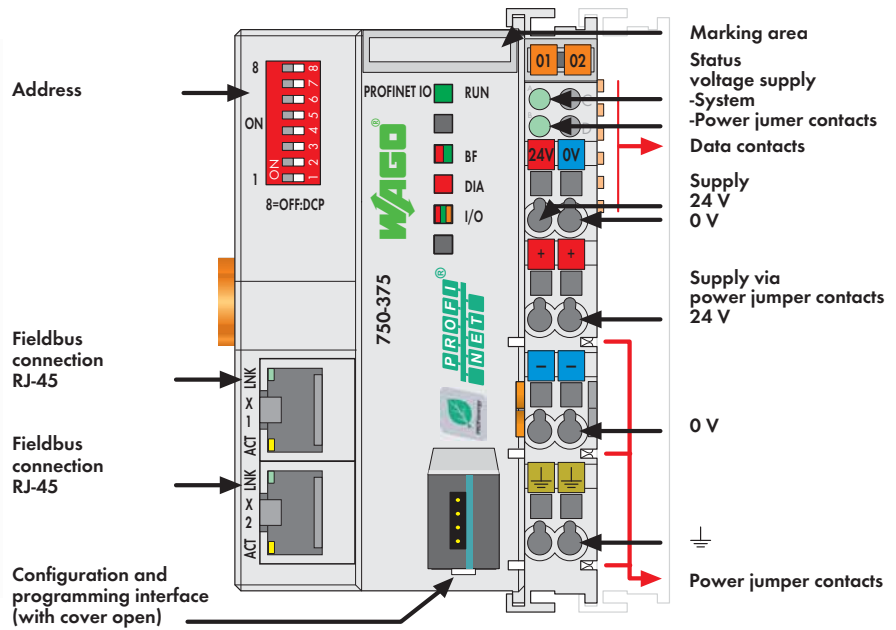

The 750-375 Fieldbus Coupler connects the WAGO-I/O-SYSTEM 750 to PROFINET IO (open, real-time industrial ETHERNET automation standard). The coupler identifies the connected I/O modules and creates local process images for maximum two IO controllers and one IO supervisor according to preset configurations. The process images may include a mixed arrangement of analog, digital or specialty modules. Analog and specialty module data is sent via words and/or bytes; digital data is sent bit by bit. The fieldbus coupler operates as an IO device in the network. It features an integrated 2-port switch, simplifying the creation of a line structure without additional network components. The device name can be assigned via DCP protocol or set via DIP switch.

Description	Item No.	Pack. Unit
PROFINET IO adv. 2-Port	750-375	1
PROFINET IO adv. 2-Port/T	750-375/025-000	1
Extended temperature range: -20 °C ... +60 °C		
Accessories	Item No.	Pack. Unit
<b>Miniature WSB Quick marking system</b>		
 plain	248-501	5
with marking	see Section 11	
Approvals		
Conformity marking	CE	
Marine applications (versions upon request)	GL	
UL 508		
ANSI/ISA 12.12.01	Class I, Div. 2, Grp. ABCD, T4	

System Data	
No. of couplers connected to Master	limited by PROFINET specification
Transmission medium	Twisted Pair S-UTP 100 Ω cat. 5
Max. length of fieldbus segment	100 m between hub station and 750-375; max. length of network limited by PROFINET specification
Baud rate	10 Mbit/s (ETHERNET protocols), 100 Mbit/s full duplex (PROFINET IO)
Transmission method	100Base-TX
Buscoupler connection	2 x RJ-45
PROFINET IO standard	V2.2 (conformance class C, pending)

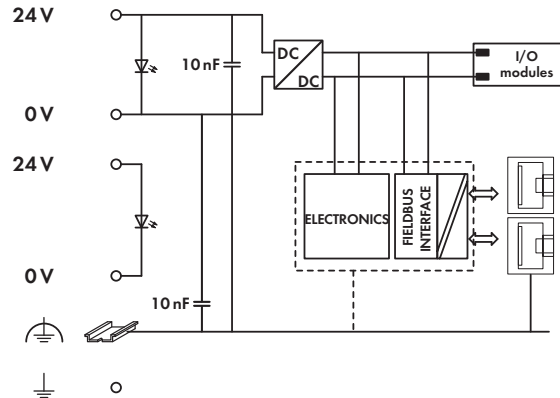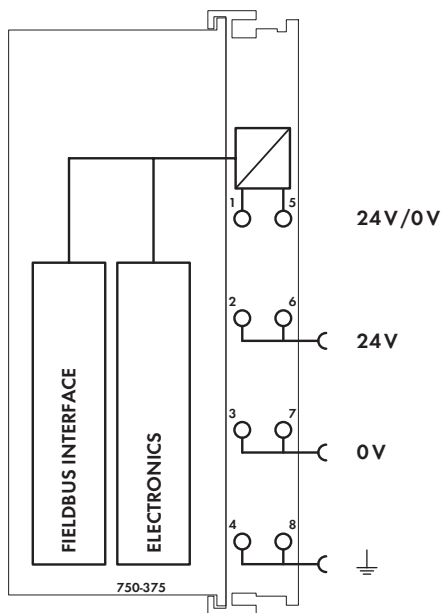

Technical Data		General Specifications	
Number of I/O modules	64	Operating temperature	0 °C ... +55 °C
with bus extension	250	Wire connection	CAGE CLAMP®
Max. input process image	512 bytes	Cross sections	0.08 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> / AWG 28 ... 14
Max. output process image	512 bytes	Strip lengths	8 ... 9 mm / 0.33 in
Configuration	via PC	Dimensions (mm) W x H x L	62 x 65 x 100
PROFINET IO features	Integrated 2-port switch;		Height from upper-edge of DIN 35 rail
	Auto-negotiation, Auto-MDIX;	Weight	150.3 g
	Isochronous real-time communication	Storage temperature	-25 °C ... +85 °C
	(pending);	Relative air humidity (no condensation)	95 %
	Transmission clock: 1 ms (RT),	Vibration resistance	acc. to IEC 60068-2-6
	1, 2, 4 ms (IRT);	Shock resistance	acc. to IEC 60068-2-27
	Device replacement without programming	Degree of protection	IP20
	tool; Shared device	EMC immunity of interference	acc. to EN 61000-6-2, marine applications
Protocols	Topology detection / LLDP,	EMC emission of interference	acc. to EN 61000-6-3, marine applications
	Network diagnostics / SNMP / MIB-2,		
	media redundancy / MRP (pending),		
	Web server / HTTP		
Profiles supported	PROFIsafe V2, PROFInergy V1.0		
ID code	Vendor ID: 0x011D;		
	Device ID: 0x02EE;		
	Coupler ID:		
	0x01000177 (firmware 01, 02),		
	0x02000177 (firmware 03)		
Power supply	24 V DC (-25 % ... +30 %)		
Input current typ. at rated load (24 V)	500 mA		
Efficiency of the power supply (typ.) at nominal load (24 V)	90 %		
Internal current consumption (5 V)	450 mA		
Total current for I/O modules (5 V)	1700 mA		
Isolation	500 V system/supply		