



<b>Technical Data Sheet:</b>	<b>DS203/0912</b>
<b>Product Description</b>	<b>Nickel Plated Brass Locknuts - (Metric)</b>
<b>Product Range</b>	<b>Accessories - NPB Lock</b>

Roman Way, Coleshill  
Birmingham  
B46 1HG, United Kingdom  
Tel: 00 44 (0)1675 466900  
Website: www.flexicon.uk.com

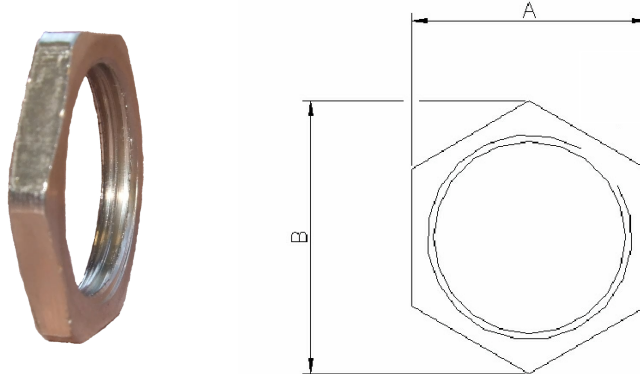

<b>Material:</b> Nickel Plated Brass
<b>Colour:</b> Self colour
<b>Fire Performance:</b> Low Fire Hazard 
<b>IP Rating:</b> N/A
<b>Applications:</b> Used to secure a fitting when used with non threaded entries
<b>Temperature Performance:</b> -50°C to +135°C

Thread Size	Part No.	Dimensions (mm)		
		A	B	Thickness
M12 x 1.5	B-M12	15	17	3.5
M16 x 1.5	B-M16	20	23	3.5
M20 x 1.5	B-M20	24	28	3.5
M25 x 1.5	B-M25	29	33	3.5
M32 x 1.5	B-M32	38	43	4.5
M40 x 1.5	B-M40	48	54	5.0
M50 x 1.5	B-M50	58	66	6.0
M63 x 1.5	B-M63	70	79	6.5
M75 x 1.5	B-M75	84	94	7.0

**Compliance, Approvals & Accreditation;**



IEC EN 61386

EN 61386 Classification Available on request

**Typical Applications;**



Construction



Rail



Machinery and OEM's



Defence

Errors, omissions and amendments excepted. As part of continuing product development Flexicon Ltd reserve the right to alter product specifications without prior notice. Data given is correct at time of compilation. Product specification and application data is for guidance only and does not constitute a warranty of any kind, either expressed or implied for Flexicon products or their suitability for a specific purpose. Third party approvals maybe limited to certain sizes within a product range.

Created by; <b>Colin Legg - Marketing Manager</b>	Approved by; <b>Ian Gibson - Technical Director</b>	Date; <b>September 2012</b>	Page Number; <b>Page 1 of 1</b>
--	--	--------------------------------	------------------------------------