


Datasheet

Art.No. 57.904.5655.0

Fuse terminal WK 4/THSI 5 LED 60U /V0

Fuse terminal block with screw connection for mounting on TS 35 and TS 32, nominal cross section 4 mm², width 6 mm, color gray

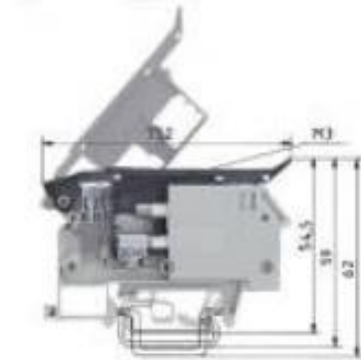

Art.No.	57.904.5655.0
EAN	4015573528321
Order unit	50 pieces

Approvals



Technical data

General

Nominal cross section	4 mm ²
Colour	Grey
Number of levels	1
Width/grid dimension	8 mm
Insulating housing	PA666
Inflammability class of insulation material acc. with UL94	V0
Mounting method	DIN rail (top hat rail)/G-rail
Terminal blocks for electrical installations	No
Fuse insert	G-fuse 5x30 mm

Technical data

Rated current	6.3 A
Rated voltage	60 V
Rated impulse voltage	8 kV
Pollution degree	3
Closing plate required	No
Type of insulation material	Thermoplastic
Length	77.2 mm

Connection Data

Connection type 1	Screw connection
Connection type 2	Screw connection
Minimum cross section solid	0.5 mm ²

Maximum cross section solid	6 mm ²
Minimum cross section fine stranded	0.5 mm ²
Maximum cross section fine stranded	4 mm ²
Wire strip length	8 mm
Torque conductor mounting	0.5 Nm

Technical Data UL/CSA

Cross section UL	22-10 AWG
Voltage UL	60 V
Current factory wiring	15 A
Current field wiring	15 A
Cross section CSA	22-10 AWG
Voltage CSA	60 V
Current CSA	6.3 A

Note

Remark to rated voltage	Note max power loss
Remark to rated current	Note max power loss
Defect indicator	LED
Voltage type for defect indication	AC/DC
Minimum operating voltage of defective display	24 V
Maximum operating voltage of defective display	60 V

Classification

ECLASS 8.1	27141116
ETIM 6.0	EC000899
ETIM 5.0	EC000899
ETIM 4.0	EC000899
ETIM 3.0	EC000899

Accessories / components

Art.No.:	Type:	Description
98.190.0000.0	Mounting rail TS 32 UNPERF - l:2000mm	Mounting rail G 32, unslotted, Höhe 5,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.190.1000.0	Mounting rail TS 32 PERF 15mm - l:2000mm	Mounting rail G 32, slotted, Höhe 15 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.210.0000.0	Mounting rail TS 32 UNPERF AL - l:2000mm	Mounting rail G 32, unslotted, Höhe 15 mm, length 2 m, material Aluminium
98.220.0000.0	Mounting rail TS 32 UNPERF CU - l:2000mm	Mounting rail G 32, unslotted, Höhe 15 mm, length 2 m, material E copper
98.300.0000.0	Mounting rail TS 35x7,5 UNPERF - l:2000mm	Mounting rail TS 35, unslotted, size 7,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.300.1000.0	Mounting rail TS 35x7,5 PERF 15mm - l:2000mm	Mounting rail TS 35, slotted, size 7,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.300.1900.0	Mounting rail TS 35x7,5 PERF 25mm - l:2000mm	Mounting rail TS 35, slotted, size 7,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.360.0000.0	Mounting rail TS 35x15-2,3 UNPERF - l:2000mm	Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.360.0004.0	Mounting rail TS 35x15-2,3 UNPERF FZN - l:2000mm	Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material steel, hot galvanized
98.370.0000.0	Mounting rail TS 35x15 UNPERF - l:2000mm	Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.370.1000.0	Mounting rail TS 35x15 PERF 15mm - l:2000mm	Mounting rail TS 35, slotted, size 15 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.380.0000.0	Mounting rail TS 35x15-2,3 UNPERF CU - l:2000mm	Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material E copper
Z5.522.7453.0	End bracket 9708 / S35	End clamp for mounting rail TS 35

Z5.522.8553.0	End bracket 9708 / 2 S 35	End clamp for mounting rail TS 35
Z5.523.5653.0	End bracket WE 2/U	End clamp for mounting rail TS 35 and TS 32
Z5.523.5753.0	End bracket WE 1/U	End clamp for mounting rail TS 35 and TS 32
Z5.523.9353.0	End bracket WEF 1/35	End clamp, schraubenlos for mounting rail TS 35

Drawings

77,2
56,6
56,95
69
29
3,2

Hutschiene EN 60715-35x7,5
housing rail EN 60715-35x7,5

G-Schiene EN 60715-G 32
g-rail EN 60715-G 32

Hutschiene EN 60715-35x15
housing rail EN 60715-35x15

01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

Technische Zeichnung
Anzahl: 1/1
2 von 2
3 von 2
4 von 2
5 von 2
6 von 2
7 von 2
8 von 2
9 von 2
10 von 2
11 von 2
12 von 2
13 von 2
14 von 2
15 von 2
16 von 2
17 von 2
18 von 2
19 von 2
20 von 2
21 von 2
22 von 2
23 von 2
24 von 2
25 von 2
26 von 2
27 von 2
28 von 2
29 von 2
30 von 2
31 von 2
32 von 2
33 von 2
34 von 2
35 von 2
36 von 2
37 von 2
38 von 2
39 von 2
40 von 2
41 von 2
42 von 2
43 von 2
44 von 2
45 von 2
46 von 2
47 von 2
48 von 2
49 von 2
50 von 2
51 von 2
52 von 2
53 von 2
54 von 2
55 von 2
56 von 2
57 von 2
58 von 2
59 von 2
60 von 2
61 von 2
62 von 2
63 von 2
64 von 2
65 von 2
66 von 2
67 von 2
68 von 2
69 von 2
70 von 2
71 von 2
72 von 2
73 von 2
74 von 2
75 von 2
76 von 2
77 von 2
78 von 2
79 von 2
80 von 2
81 von 2
82 von 2
83 von 2
84 von 2
85 von 2
86 von 2
87 von 2
88 von 2
89 von 2
90 von 2
91 von 2
92 von 2
93 von 2
94 von 2
95 von 2
96 von 2
97 von 2
98 von 2
99 von 2
100 von 2

Teil-Nr./part-nr.	Farbe/colour	Typ/type
57.904.5355.0	grau/grey	WZ/THS15...U
57.904.5455.0	grau/grey	WZ/THS15 LED 12 U
57.904.5555.0	grau/grey	WZ/THS15 LED 24 U
57.904.5655.0	grau/grey	WZ/THS15 LED 60 U
57.904.5755.0	grau/grey	WZ/THS15 GL 250 U
57.904.5855.0	grau/grey	WZ/THS15 GL 500 U

Wieland
Elektronische
Halbleitungen

Typ
Sicherung
Tabelle

SICHERUNGSKLEMME
Type Terminal

57.904.5355.0 01K

2:1

Weitere Daten siehe Katalog
further data see catalog