

Technical Data Sheet:	DS023-2
Product Description	Standard weight nylon (flame retardant PA6) corrugated flexible conduit
Product Range	FPAS- Non-Metallic Conduits

FLEXICON

FLEXIBLE CONDUIT SOLUTIONS

Roman Way, Coleshill
Birmingham



B46 1HG

Tel: 00 44 (0)1675 466900


Website: www.flexicon.uk.com



Above picture illustrates Conduit complete with FPA fitting



Conduit complete with FPA fitting

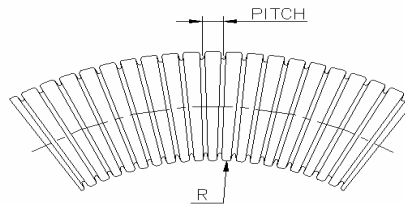

Material:
Nylon PA6 (flame retardant)

Colour:
Black or
Grey (RAL 7031)

Fire Performance:
Highly flame retardant, halogen, sulphur and phosphorous free



IP Rating:

IP66
with FPA fittings
IP66 IP67 IP68 IP69
with FPAX & FPAU fittings

Applications:
Ideal for use in both internal and external applications FPAS conduit provides excellent resistance to UV (Black Only), abrasion, oil and solvents.

Compression Strength:
75kg/100mm
(21mm size)

Pull-off (Tensile) strength :
40kg FPA, FPAX & FPAU fittings
25kg FLK fittings
(21mm size)

Temperature Performance:

Static: -40°C to +120°C
Dynamic: -20°C to +100°C

Nominal Size	Pitch F= fine C= coarse	Part No	Dimensions and Mechanical Properties					Weight g/M
			Reel Length (M)	OD (mm)	ID (mm)	Min Bend radius R (mm)	Compression Strength kg/100mm	
10	F	FPAS10#	50	10.0	6.3	15	100	19
11	F	FPAS11#	50	11.5	8.2	20	60	22
13	F	FPAS13#	25, 50	13.0	9.8	25	75	28
16	F	FPAS16#	25, 50	15.8	11.8	35	60	38
18	F	FPAS18#	50	18.5	14.2	40	80	49
20	C	FPAS20#	10, 25, 50	20	14.8	45	80	56
21	F	FPAS21#	10, 25, 50	21.2	16.7	45	75	60
25	C	FPAS25#	10, 25, 50	25.0	19.1	50	80	80
28	F	FPAS28#	10, 25, 50	28.5	22.8	50	70	100
32	C	FPAS32#	50	32.0	24.8	60	80	120
34	F	FPAS34F#	50	34.5	28.8	60	70	135
34	C	FPAS34#	25, 50	34.5	28.1	60	90	135
42	C	FPAS42#	10, 25, 50	42.5	35.5	70	100	165
54	C	FPAS54#	10, 25, 50	54.5	47.2	80	100	235
67	C	FPAS67#	10, 25	67.2	56.3	130	75	365

Compliance, Approvals & Accreditation;



EN 61386 Classification Available on request

Vibration and Shock resistant to EN 61373 Cat 2

File No. E229161

Lloyds Register of shipping Type Approved

Russian Fire Safety Certificate No. 1374363

Typical Applications;



Construction



Machinery and OEM's

NB: # add B for Black or G for Grey

Errors, omissions and amendments excepted. As part of continuing product development Flexicon Ltd reserve the right to alter product specifications without prior notice. Data given is correct at time of compilation. Product specification and application data is for guidance only and does not constitute a warranty of any kind, either expressed or implied for Flexicon products or their suitability for a specific purpose. Third party approvals maybe limited to certain sizes within a product range.

Created by; Sarah Lee - Marketing Assistant	Approved by; Ian Gibson - Technical Director	Date; July 2017	Page Number; Page 1 of 2
---	--	---------------------------	------------------------------------

Technical Data Sheet:	DS023-2
Product Description	Standard weight nylon (flame retardant PA6) corrugated flexible conduit
Product Range	FPAS - Non-Metallic Conduits

FLEXICON

FLEXIBLE CONDUIT SOLUTIONS

Roman Way, Coleshill
Birmingham

B46 1HG

Tel: 00 44 (0)1675 466900

Website: www.flexicon.uk.com



Technical Properties and Performance	
Detail	Rating
Highly flexible with excellent fatigue life	Yes
IP (Ingress Protection) rating with FPA fittings	IP66
IP (Ingress Protection) rating with FPAX Fittings	IP66+67+68+69
Temperature range-static	-40°C to +120°C
Temperature range-dynamic	-20°C to +100°C
Displays self recovery If crushed	Yes
Water and dust resistant	Yes
Abrasion resistant	Yes
High impact strength (at -25 ° C) BSI Report 2381/7910013	> 6 Joules
Vibration and Shock resistant to EN 61373 Cat 2 (TUV Report 75908286)	Yes
UV resistant (Black) - (UL Report No. 13CA50836)	Yes
UL Recognised (File No. E229161)	Yes
Lloyds Register Type Approval	Yes

Fire Performance	
Limiting Oxygen index to ISO 4589 (RAPRA Report No. 38985)	26.4%
Flame Retardency to UL 94 (RAPRA Report No. 39933)	V2
Ignition and fume rating to NFF16-101/2 (RAPRA Report No.43386)	I4F1
Maximum smoke opacity to BS 6853 annex D8.3 (RAPRA Report No. 38985)	Ao = 0.02
Toxicity Index to BS6853 B.1 (WFRC Report No. 141180)	r = 1.55
Toxicity Index to NFX70 - 100 (WFRC Report No. 141180)	CIT = 29.93
Self extinguishing to EN61386-1 (BSI Report No. 2381/7847798)	Yes
Halogen Sulphur and Phosphorous free	Yes
Russian Fire Safety Certificate No. 1374363	Yes

Other Products available:

FPAH

Construction: Heavy weight, flame retardant, nylon (PA6) corrugated flexible conduit. Colour black.

Typical Applications: All types of machinery and public buildings where high mechanical strength required.



FPAL

Construction: Light weight nylon (PA6) corrugated flexible conduit. Colour black or grey (RAL 7031).

Typical Applications: Machines where lower mechanical protection is required and buildings.



Created by; Sarah Lee - Marketing Assistant	Approved by; Ian Gibson - Technical Director	Date; July 2017	Page Number; Page 2 of 2
---	--	---------------------------	------------------------------------