



## TOUCH-SAFE SMALL HEATER (SEMICONDUCTOR) CSK 060 | 10W, 20W

[www.stego.de](http://www.stego.de) > Products > Heating > Heaters > 10W to 20W

Print

- Low surface temperature
- Double insulated (plastic housing)
- Wide voltage range
- Dynamic heating up
- Clip fixing

The heaters are used in enclosures where condensation is to be prevented or the temperature may not fall below a minimum value. In this way corrosion is avoided and an even temperature is ensured. The heaters are designed for permanent operation.

## TECHNICAL DATA

[DOWNLOAD PDF](#)


<b>Operating voltage</b>	120 - 240V AC/DC <sup>1</sup> (min. 110V, max. 265V)
<b>Heating element</b>	PTC resistor - temperature limiting
<b>Surface temperature</b>	< +85°C (+185°F) (according to VDE 0100), except upper protective grille
<b>Connection</b>	2-pole terminal 2.5mm <sup>2</sup> , torque 0.8Nm max.
<b>Casing</b>	plastic according to UL94 V-0, black
<b>Dimensions</b>	98 x 38 x 75mm
<b>Mounting</b>	clip for 35mm DIN rail, EN 60715
<b>Fitting position</b>	vertical airflow (air outlet up, connection on bottom)
<b>Operating/Storage temperature</b>	-45°C to +70°C (-49°F to +158°F)
<b>Operating/Storage humidity</b>	max. 90% RH (non-condensing)
<b>Protection type/Protection class</b>	IP20 / II (double insulated)
<b>Approvals</b>	VDE, UL File No. E150057, EAC
<b>Note</b>	other voltages on request

<sup>1</sup> Operating with voltages below 140V AC/DC reduces heating performance by approx 10%.

Art. No.	Heating capacity <sup>2</sup>	Inrush current max.	Recommended pre-fuse T (time-delay)	Weight (approx.)
06040.0-00	10W	1.0A	2.0A	0.2kg
06030.0-00	20W	2.5A	4.0A	0.3kg

<sup>2</sup> at +20°C (+68°F) ambient temperature

## TECHNICAL DRAWING

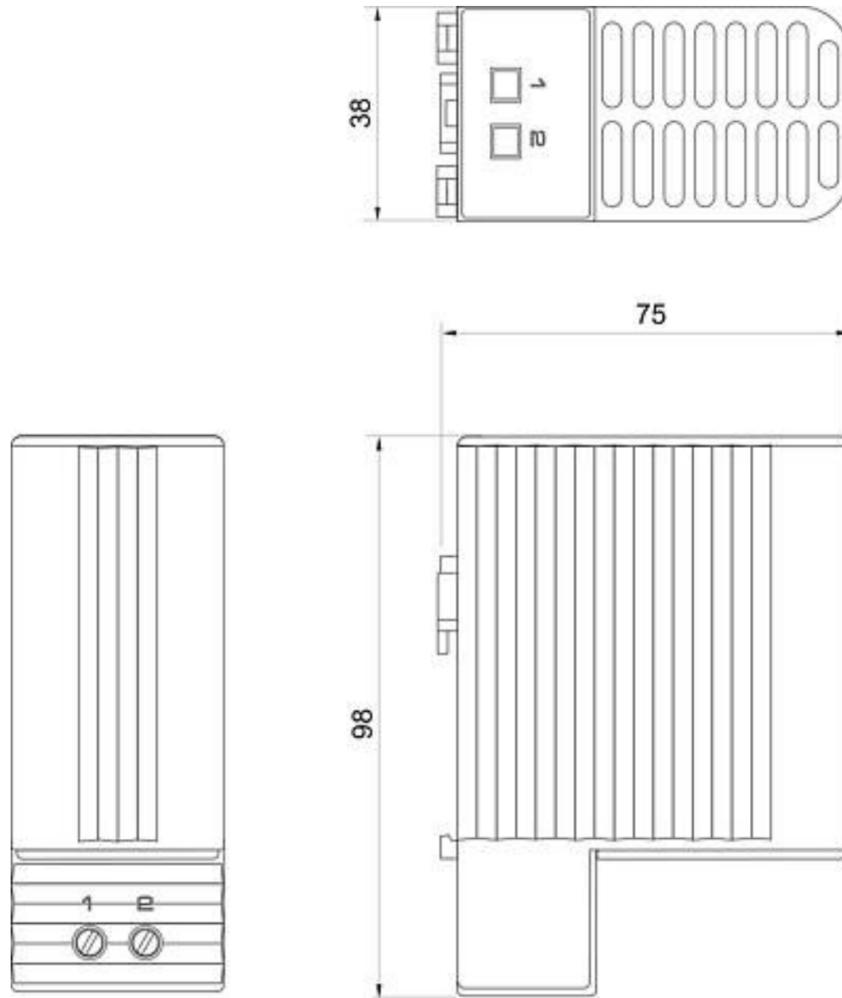

Touch-safe Small Heater CSK 060 Series (Semiconductor)