


# Auxiliary contacts

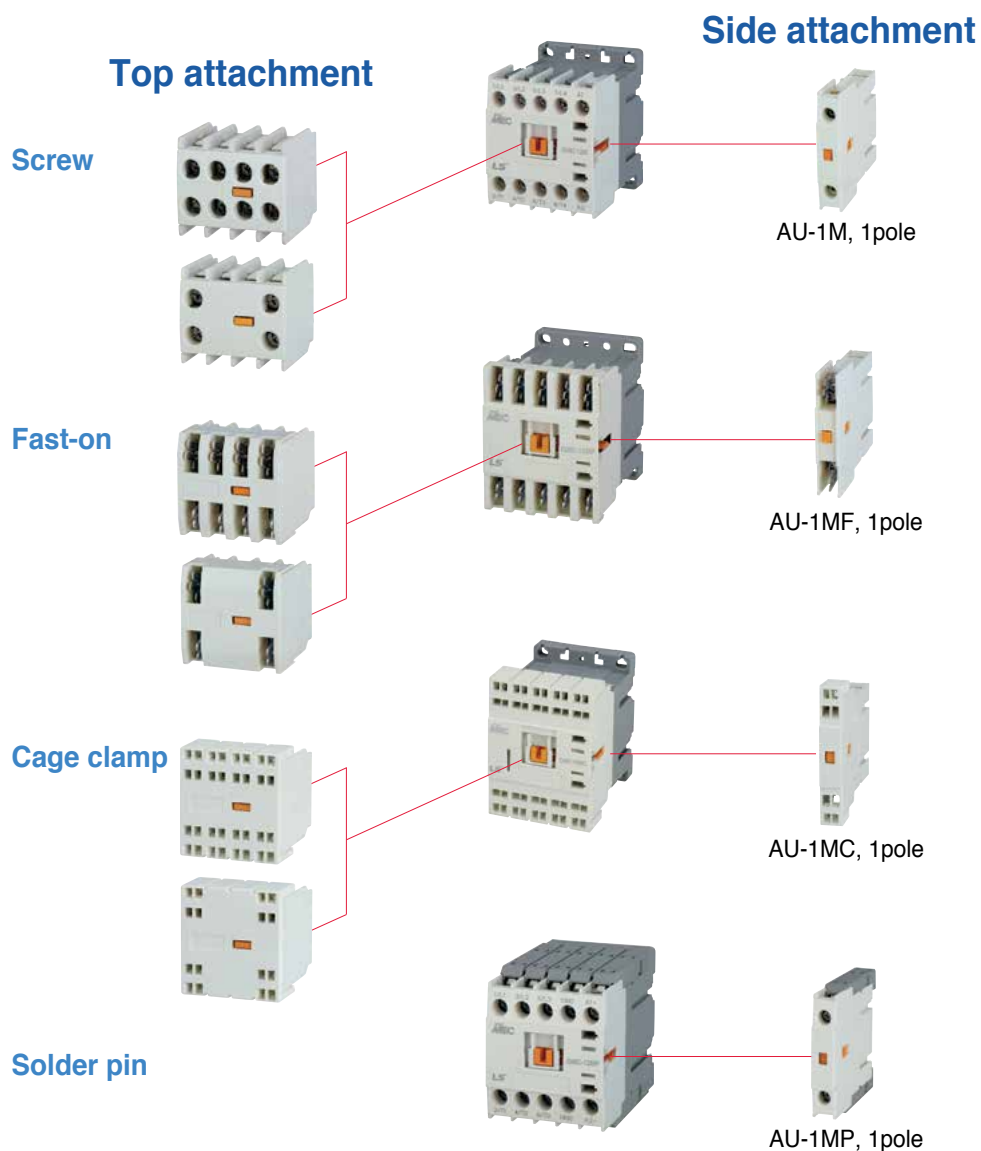

Note) 1. Auxiliary contacts for side attachment can be extended up to 2 contacts.  
 2. DC 3W operation coil can be extended to 6 contacts,  
 DC 2W operation coil can extend to 2 contacts,  
 and DC 1.2W operation coil can not extend auxiliary contact.

## Performance of Auxiliary Contact

Type	Rated Voltage(V)	Rated Current(A)	Closing and breaking capacity(A)		Lifetime(10,000 times)	
			Closing	Breaking	Mechanical	Electrical
AU-1M	440	3	38	38	100	1200
AU-2M	440	3	38	38	100	1200
AU-4M	440	3	38	38	100	1200

## Auxiliary contact rating

Rated operating current											Rated current
AC15				DC13			AC12		DC12		
110V	220V	500V	600V	48V	110V	220V	110V	220V	110V	220V	
6	3	1.5	1.2	1.5	0.55	0.27	10	8	2.5	1	10