


## MODULAR LEGENDS AND LABELS MG-17.5




LABORATORY TEST 

**DIN 30643**

# MODULAR LEGENDS AND LABELS MG-17.5

## *Technical characteristics*

Geometric shape	rectangular with square corners
Precut	yes
Min application temperature	10 °C
Max application temperature	40 °C

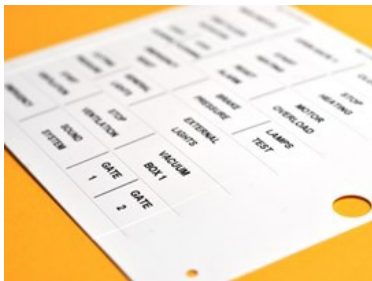

# MODULAR LEGENDS AND LABELS MG-17.5

## List of products

<b>MG-17.5-R</b>							
Material							Rigid PVC
UL94 class							V0
Silicon free							yes
Min operating temperature range							-30 °C
Max operating temperature range							60 °C
Type	Height	Length	Quantity per sheet	Number of modules	Pack qty	SWcode	Colour
990884	15 mm	140 mm	7	8	350	331	Yellow
990862N	15 mm	17.5 mm	42	1	1,050	321	Black
990864N	15 mm	35 mm	21	2	1,050	322	Black
990907N	15 mm	52.5 mm	12	3	700	323	Black
990912	15 mm	70 mm	6	4	300	324	Red
990788N	12 mm	105 mm	8	6	400	332	White
990768N	15 mm	17.5 mm	42	1	1,050	321	White
990769N	15 mm	17.5 mm	36	1	1,050	321	Yellow
990785NGY	15 mm	17.5 mm	36	1	1,050	321	Grey
990766N	15 mm	35 mm	21	2	1,050	322	White
990767N	15 mm	35 mm	21	2	1,050	322	Yellow
990784NGY	15 mm	35 mm	21	2	1,050	322	Grey
990764N	15 mm	52.5 mm	12	3	700	323	White
990765N	15 mm	52.5 mm	12	3	700	323	Yellow
990783NGY	15 mm	52.5 mm	12	3	700	323	Grey
990762	15 mm	70 mm	6	4	300	324	White
990763	15 mm	70 mm	6	4	300	324	Yellow
990782GY	15 mm	70 mm	6	4	300	324	Grey
990755	15 mm	87.5 mm	6	5	300	325	White
990761	15 mm	87.5 mm	6	5	300	325	Yellow
990781GY	15 mm	87.5 mm	6	5	300	325	Grey
990798N	15 mm	107.5 mm	7	6	350	329	White
990799N	15 mm	107.5 mm	7	6	350	329	Yellow
990809NGY	15 mm	107.5 mm	7	6	350	329	Grey
990846	15 mm	107.5 mm	7	6	350	329	Red
990847	15 mm	107.5 mm	7	6	350	329	Blue

990889	25 mm	18 mm	24	1	1,200	335	White
990895	25 mm	18 mm	24	1	1,200	335	Yellow
990900	25 mm	18 mm	24	1	1,200	335	Red
990914	25 mm	18 mm	24	1	1,200	335	Black
990891	25 mm	27 mm	16	1,5	800	334	White
990892	25 mm	27 mm	16	1,5	800	334	Yellow
990897	25 mm	27 mm	16	1,5	800	334	Red
990888	25 mm	36 mm	12	2	600	336	White
990894	25 mm	36 mm	12	2	600	336	Yellow
990899	25 mm	36 mm	12	2	600	336	Red
990916	25 mm	36 mm	12	2	600	336	Black
990887	25 mm	50 mm	8	3	400	337	White
990893	25 mm	50 mm	8	3	400	337	Yellow
990898	25 mm	50 mm	8	3	400	337	Red
990917	25 mm	50 mm	8	3	400	337	Black
990890	25 mm	70 mm	4	4	200	338	White
990896	25 mm	70 mm	4	4	200	338	Yellow
990901	25 mm	70 mm	4	4	200	338	Red
990918	25 mm	70 mm	4	4	200	338	Black
990950	37.5 mm	17.5 mm	18	1	900	345	White
990951	37.5 mm	17.5 mm	18	1	900	345	Yellow
990952	37.5 mm	17.5 mm	18	1	900	345	Red
990953	37.5 mm	17.5 mm	18	1	900	345	Black
990883	15 mm	140 mm	7	8	350	331	White
990915	25 mm	27 mm	16	1,5	800	334	Black

## MG-17.5-R-HF

Material	Polycarbonate
UL94 class	V0
Halogen Free	yes
Silicon free	yes
Min operating temperature range	-40 °C
Max operating temperature range	130 °C

Type	Colour	Number of modules	Height	Length	Quantity per sheet	Pack qty	SWcode
990784N-HF	Metallic grey	2	15 mm	35 mm	21	1,050	322
990783N-HF	Metallic grey	3	15 mm	52.5 mm	14	700	323
990782-HF	Metallic grey	4	15 mm	70 mm	6	300	324
990781-HF	Metallic grey	5	15 mm	87.5 mm	6	300	325
990785N-HF	Metallic grey	1	15 mm	17.5 mm	42	1,050	321

## MG-17.5-A

Material	Rigid PVC
UL94 class	V0
Silicon free	yes
Adhesive	yes
Min operating temperature range	-30 °C
Max operating temperature range	60 °C

Type	Colour	Number of modules	Height	Length	Quantity per sheet	Pack qty	SWcode
990881	Yellow	8	15 mm	140 mm	7	350	931
990753N	White	2	15 mm	35 mm	21	525	922
990820N	Yellow	2	15 mm	35 mm	21	525	922
990822NGY	Grey	2	15 mm	35 mm	21	525	922
990923N	Red	2	15 mm	35 mm	21	525	922
990963N	Blue	2	15 mm	35 mm	21	525	922
990954N	Green	2	15 mm	35 mm	21	525	922
990913N	Black	2	15 mm	35 mm	21	525	922
990824	White	6	15 mm	107.5 mm	7	350	929
990826	Yellow	6	15 mm	107.5 mm	7	350	929
990827NGY	Grey	6	15 mm	107.5 mm	7	350	929
990929	Red	6	15 mm	107.5 mm	7	350	929
990926	Blue	6	15 mm	107.5 mm	7	350	929
990925	Green	6	15 mm	107.5 mm	7	350	929
990833N	Black	6	15 mm	107.5 mm	7	350	929
990972		6	20 mm	107.5 mm	5	125	946
990869	White	1	25 mm	18 mm	24	1,200	935
990878	Yellow	1	25 mm	18 mm	24	1,200	935
990905	Red	1	25 mm	18 mm	24	1,200	935

990919	Black	1	25 mm	18 mm	24	1,200	935
990871	White	1.5	25 mm	27 mm	16	800	934
990872	Yellow	1.5	25 mm	27 mm	16	800	934
990902	Red	1.5	25 mm	27 mm	16	800	934
990920	Black	1.5	25 mm	27 mm	16	800	934
990868	White	2	25 mm	36 mm	12	600	936
990877	Yellow	2	25 mm	36 mm	12	600	936
990904	Red	2	25 mm	36 mm	12	600	936
990970	Blue	2	25 mm	36 mm	12	600	936
990921	Black	2	25 mm	36 mm	12	600	936
990867	White	3	25 mm	50 mm	8	400	937
990873	Yellow	3	25 mm	50 mm	8	400	937
990903	Red	3	25 mm	50 mm	8	400	937
990922	Black	3	25 mm	50 mm	8	400	937
990870	White	4	25 mm	70 mm	4	200	938
990879	Yellow	4	25 mm	70 mm	4	200	938
990906	Red	4	25 mm	70 mm	4	200	938
990924	Black	4	25 mm	70 mm	4	200	938
990880	White	8	15 mm	140 mm	7	350	931

## MG-17.5-A-HF

Material	Polycarbonate
UL94 class	V0
Halogen Free	yes
Silicon free	yes
Adhesive	yes
Min operating temperature range	-40 °C
Max operating temperature range	120 °C

Type	Height	Length	Quantity per sheet	Number of modules	Pack qty	SWcode	Colour
990822N-HF	15 mm	35 mm	21	2	525	922	Metallic grey
990827N-HF	15 mm	107.5 mm	7	6	175	929	Metallic grey
990882-HF	15 mm	140 mm	5	8	125	931	Metallic grey
990972-HF	20 mm	107.5 mm	7	6	175	946	

### MG-17.5-VY

Min operating temperature range  
 Max operating temperature range  
 Material  
 Adhesive

-40 °C  
 80 °C  
 PVC film  
 yes

Type	Height	Length	Quantity per sheet	Number of modules	Pack qty	SWcode	Colour
990746N	15 mm	107.5 mm	7	6	350	570	White
990747N	15 mm	107.5 mm	7	6	350	570	Yellow

### MG-17.5-PY

Min operating temperature range  
 Max operating temperature range  
 Material  
 Adhesive

-40 °C  
 140 °C  
 Polyester film  
 yes

Type	Height	Length	Quantity per sheet	Number of modules	Pack qty	SWcode	Colour
990931	15 mm	140 mm	7	8	350	931	White
990777N	15 mm	107.5 mm	7	6	350	570	White
990779N	15 mm	107.5 mm	7	6	350	570	Metallic grey

### MG-17.5-SB

Min operating temperature range  
 Max operating temperature range  
 Material

-40 °C  
 80 °C  
 Rigid PVC

Type	Height	Length	Pack qty	Colour	Thickness
990759	15 mm	430 mm	10	White	0.7 mm
990760	15 mm	430 mm	10	Yellow	0.7 mm
990757	15 mm	430 mm	10	White	0.5 mm
990758	15 mm	430 mm	10	Yellow	0.5 mm