

# LEGENDS MG-TAPW

*9mm precut*

MG-TAPW legends are used, with legend holders or legend rails, to identify a wide range of cables and components. Consult us for availability of other colours.



CERTIFICATES 

  2011/65/EU

LABORATORY TEST 

## **CEI EN 60950-1**

### **INDELIBILITY**

#### **Information technology equipment - Safety**

*Part 1: General requirements*

*§ 1.7.11 Durability*

Compliance is checked by inspection and by rubbing the marking by hand for 15 s with a piece of cloth soaked with water and again for 15 s with a piece of cloth soaked with hexane.

After this test, the marking shall be legible; it shall not be possible to remove marking plates easily and they shall show no curling.

## **CEI EN 61010-1**

### **INDELIBILITY**

#### **Ed.2 equivalent to VDE 0411-1**

#### **Safety indications for electric devices for measurement, control and laboratory use**

*Part 1: General indications*

This regulation requires that both material and the print shall withstand, cleaning with chemical agents commonly used in industry.

By rubbing manually by hand, without excessive pressure, for 30 seconds with a cloth soaked in the specific detergent or, if not specified, Isopropyl Alcohol.

---

## **CEMBRE STANDARD**

### **INDELIBILITY**

This test was created to simulate cleaning with chemical products commonly used on various surfaces.

By wiping with a cloth soaked in 95% Ethanol 30 times and making a visual inspection after every 10 passes.

---



## **DIN 30643**

---

# LEGENDS MG-TAPW

## Technical characteristics

Geometric shape	rectangular with square corners
Material	Rigid PVC
UL94 class	V0
Silicon free	yes
Precut	yes
Min operating temperature range	-30 °C
Max operating temperature range	60 °C

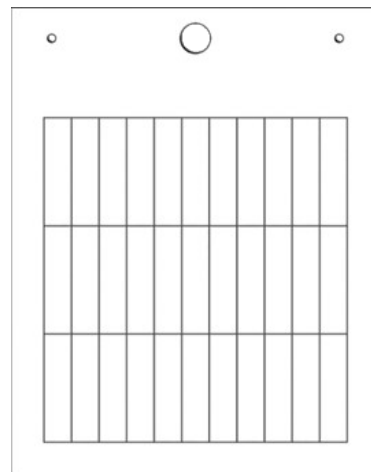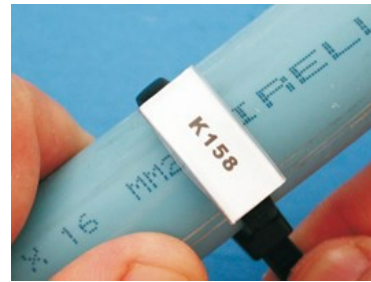

# LEGENDS MG-TAPW

## List of products

MG-TAPW						
Type	Colour	Height	Length	Quantity per sheet	Pack qty	SWcode
49092N	White	9 mm	12 mm	88	2,200	360
49042N	Yellow	9 mm	12 mm	88	2,200	360
49043N	Yellow	9 mm	15 mm	77	1,925	361
49093N	White	9 mm	15 mm	77	1,925	361
49053N	Green	9 mm	15 mm	77	1,925	361
49090N	White	9 mm	20 mm	55	2,750	362
49040N	Yellow	9 mm	20 mm	55	2,750	362
49096	White	9 mm	29 mm	30	1,500	363
49046	Yellow	9 mm	29 mm	30	1,500	363
49066	Blue	9 mm	29 mm	30	1,500	363
49091N	White	9 mm	35 mm	33	1,650	364
49041N	Yellow	9 mm	35 mm	33	1,650	364
49094	White	9 mm	50 mm	20	1,000	376
49044	Yellow	9 mm	50 mm	20	1,000	376
49095N	White	9 mm	70 mm	11	550	378
49045N	Yellow	9 mm	70 mm	11	550	378
49055N	Green	9 mm	70 mm	11	550	378

