

PUSH BUTTON LEGENDS MG-PTS

precut

Push-out the Ø 22.5 / 24 / 31 mm blank to locate and secure the legend behind the manual operator head.
Consult us for availability of other colours.
Note:UV resistance may vary between colours.

The colours white PVC10050WH and yellow PVC10050YE are UL approved.



CERTIFICATES 



LABORATORY TEST 

CEI EN 60950-1

INDELIBILITY

Information technology equipment - Safety

Part 1: General requirements

§ 1.7.11 Durability

Compliance is checked by inspection and by rubbing the marking by hand for 15 s with a piece of cloth soaked with water and again for 15 s with a piece of cloth soaked with hexane.

After this test, the marking shall be legible; it shall not be possible to remove marking plates easily and they shall show no curling.

CEI EN 61010-1

INDELIBILITY

Ed.2 equivalent to VDE 0411-1

Safety indications for electric devices for measurement, control and laboratory use

Part 1: General indications

This regulation requires that both material and the print shall withstand, cleaning with chemical agents commonly used in industry.

By rubbing manually by hand, without excessive pressure, for 30 seconds with a cloth soaked in the specific detergent or, if not specified, Isopropyl Alcohol.

CEMBRE STANDARD

INDELIBILITY

This test was created to simulate cleaning with chemical products commonly used on various surfaces.


By wiping with a cloth soaked in 95% Ethanol 30 times and making a visual inspection after every 10 passes.

DIN 30643

PUSH BUTTON LEGENDS MG-PTS

Technical characteristics


Material	Rigid PVC
UL94 class	V0
Min operating temperature range	-30 °C
Max operating temperature range	60 °C

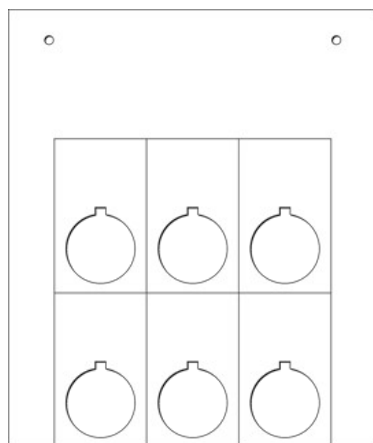

PUSH BUTTON LEGENDS MG-PTS

List of products


MG-PTS							
Type	Colour	Height	Length	Diameter of the hole	Quantity per sheet	Pack qty	SWcode
15021	Red	50 mm	30 mm	22.5 mm	6	300	1001
15092	White	39 mm	30 mm	22.5 mm	6	300	1002
15042	Yellow	39 mm	30 mm	22.5 mm	6	300	1002
15082GY	Grey	39 mm	30 mm	22.5 mm	6	300	1002
15022	Red	39 mm	30 mm	22.5 mm	6	300	1002
15002	Black	39 mm	30 mm	22.5 mm	6	300	1002
15090	White	40 mm	30 mm	22.5 mm	6	300	1000
15040	Yellow	40 mm	30 mm	22.5 mm	6	300	1000
15080GY	Grey	40 mm	30 mm	22.5 mm	6	300	1000
15020	Red	40 mm	30 mm	22.5 mm	6	300	1000
15000	Black	40 mm	30 mm	22.5 mm	6	300	1000
15091	White	50 mm	30 mm	22.5 mm	6	300	1001
15041	Yellow	50 mm	30 mm	22.5 mm	6	300	1001
15081GY	Grey	50 mm	30 mm	22.5 mm	6	300	1001
15001	Black	50 mm	30 mm	22.5 mm	6	300	1001
15094	White	60 mm	62 mm	31 mm	4	200	1003
15044	Yellow	60 mm	62 mm	31 mm	4	200	1003
15084GY	Grey	60 mm	62 mm	31 mm	4	200	1003
15024	Red	60 mm	62 mm	31 mm	4	200	1003
15064	Blue	60 mm	62 mm	31 mm	4	200	1003
15004	Black	60 mm	62 mm	31 mm	4	200	1003



MG-PTSA

Adhesive

yes



Type	Colour	Height	Length	Diameter of the hole	Quantity per sheet	Pack qty	SWcode
15297	White	39 mm	30 mm	24 mm	6	150	1007
15121	Red	50 mm	30 mm	22.5 mm	6	150	1001
15199	White	50 mm	30 mm	24 mm	6	150	1006
15188GY	Grey	62 mm	60 mm	22.5 mm	4	100	1004
15187GY	Grey	60 mm	40 mm	31 mm	4	100	1004
15198	White	62 mm	60 mm	22.5 mm	4	100	1004
15197	White	60 mm	40 mm	31 mm	4	100	1004
15108	Black	62 mm	60 mm	22.5 mm	4	100	1004
15122	Red	39 mm	30 mm	22.5 mm	6	150	1002
15142	Yellow	39 mm	30 mm	22.5 mm	6	150	1002
15182GY	Grey	39 mm	30 mm	22.5 mm	6	150	1002
15102	Black	39 mm	30 mm	22.5 mm	6	150	1002
15100	Black	40 mm	30 mm	22.5 mm	6	150	1000
15120	Red	40 mm	30 mm	22.5 mm	6	150	1000
15181GY	Grey	50 mm	30 mm	22.5 mm	6	150	1001
15180GY	Grey	40 mm	30 mm	22.5 mm	6	150	1000
15140	Yellow	40 mm	30 mm	22.5 mm	6	150	1000
15191	White	50 mm	30 mm	22.5 mm	6	150	1001
15190	White	40 mm	30 mm	22.5 mm	6	150	1000
15141	Yellow	50 mm	30 mm	22.5 mm	6	150	1001
15101	Black	50 mm	30 mm	22.5 mm	6	150	1001
15164	Blue	60 mm	62 mm	31 mm	4	100	1003
15124	Red	60 mm	62 mm	31 mm	4	100	1003
15184GY	Grey	60 mm	62 mm	31 mm	4	100	1003
15144	Yellow	60 mm	62 mm	31 mm	4	100	1003
15194	White	60 mm	62 mm	31 mm	4	100	1003
15104	Black	60 mm	62 mm	31 mm	4	100	1003
15192	White	39 mm	30 mm	22.5 mm	6	150	1002