

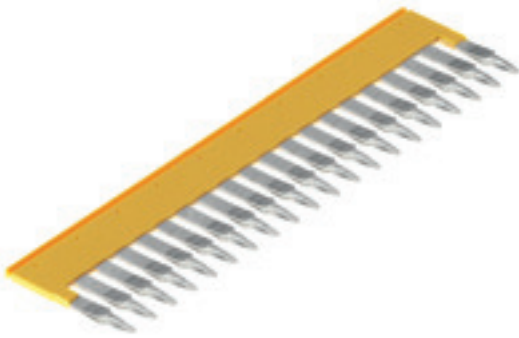
ZQV 4/20 GE**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image**Klippon® Connect with clamping yoke Technology**

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Version	Z-series, Cross-connector, For the terminals, Number of poles: 20
Order No.	1909010000
Type	ZQV 4/20 GE
GTIN (EAN)	4032248535637
Qty.	20 pc(s).

Creation date April 15, 2021 1:46:32 PM CEST

Catalogue status 09.04.2021 / We reserve the right to make technical changes.

ZQV 4/20 GE**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	31.6 mm	Depth (inches)	1.244 inch
Height	120.3 mm	Height (inches)	4.736 inch
Net weight	18.195 g	Width	2.8 mm
Width (inches)	0.11 inch		

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-60
Continuous operating temp., max.	130		

Material data

Material	Wemid	Colour	yellow
UL 94 flammability rating	V-0		

System specifications

Version	For the terminals
---------	-------------------

Additional technical data

Installation advice	Direct mounting	Type of fixing	Plugged
---------------------	-----------------	----------------	---------

Cross-connector

Rated current, multi-pole	32 A	Type	Cross-connector
---------------------------	------	------	-----------------

Dimensions

Pitch in mm (P)	6.1 mm
-----------------	--------

General

Installation advice	Direct mounting	Number of poles	20
---------------------	-----------------	-----------------	----

Rating data

Rated current	32 A
---------------	------

Classifications

ETIM 6.0	EC000489	ETIM 7.0	EC000489
ECLASS 9.0	27-14-11-40	ECLASS 9.1	27-14-11-40
ECLASS 10.0	27-14-11-40	ECLASS 11.0	27-14-11-40

Important note

Product information	Attention: not finger-safe; not suitable for ATEX use Due to stability and temperature reasons It is only possible to break out 60% of contact elements The usage of cross connectors reduces the rated voltage to 400V The voltage reduced to 25V if cut cross connection with blank cut edges are used
---------------------	--

Data sheet**ZQV 4/20 GE**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data**Approvals**

Approvals



ROHS

Conform

Downloads

Approval/Certificate/Document of
Conformity

[EAC certificate](#)

Engineering Data

[STEP](#)

Engineering Data

[EPLAN, WSCAD, Zuken E3.S](#)

User Documentation

[Operating instructions_ZDU1.5-ZDU35_ZQV.pdf](#)
[StorageConditionsTerminalBlocks](#)

Brochure/Catalogue

[Catalogues in PDF-format](#)