

REU

Roof exhaust unit

nVent

HOFFMAN

CONNECT AND PROTECT

The roof exhaust unit, REU, with either a IP 33 or 54 protection degree, is easy to install thanks to its click-in feature. This is a good solution when there is limited space on the enclosure's door or side panels.

Description: Roof exhaust unit for mounting on the top of the enclosure, providing natural ventilation. The unit is easily installed with a quick fastening system. Filtration efficiency of >90% for the IP 54 unit (REU05R5).

Material: Painted mild steel, and injection-moulded thermoplastic (ABS-FR) self extinguishing, UL94V0.

Temperature range: -15 °C to +55 °C.

Protection: IP 33 No filtermat, IP54. Filtermat.

Finish: RAL 7035 structured powder coating.

Pack quantity: One roof exhaust unit.




CE EAC


REU

Roof exhaust unit


Top view

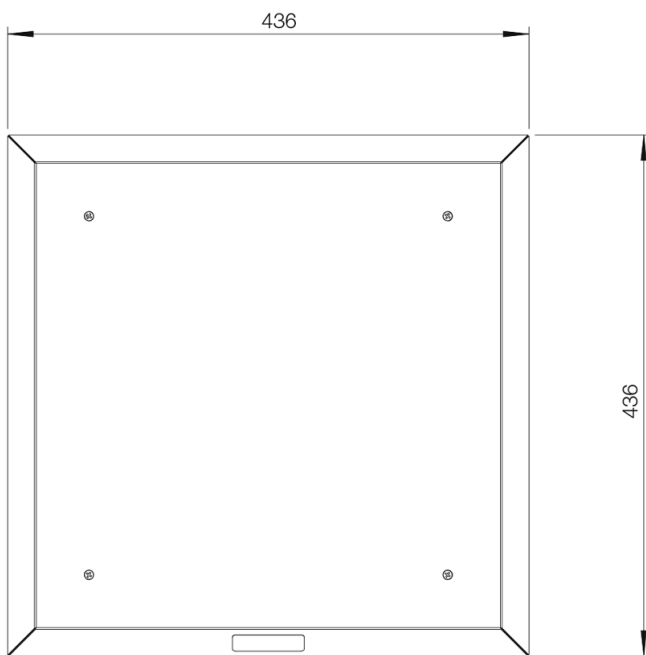

Bottom view

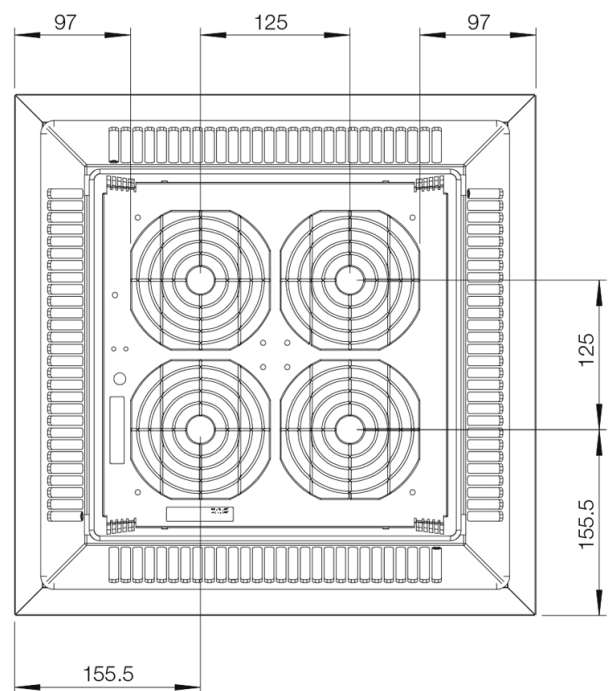

Front view

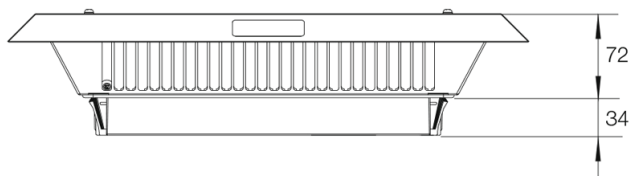

REU

Roof exhaust unit



HOFFMAN

CONNECT AND PROTECT

Filter mat (EN779)	Filtration efficiency (%)	IP	Cut-out (mm)	Weight (kg)	Item no.
No filter mat	No filter mat	33	291 × 291	3.35	REU03R5
G4	>90	54	291 × 291	3.40	REU05R5

REU

Roof exhaust unit