




Price : 603.00 GBP

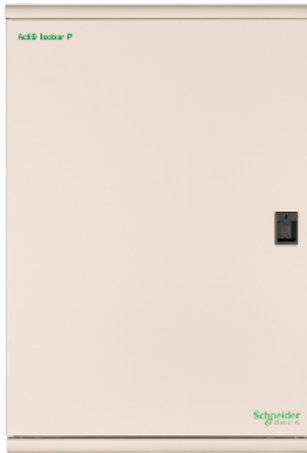

### Main

|                           |  |
|---------------------------|--|
| Range                     | Acti 9   |
| Product name              | Acti 9 IsoBar P B  |
| Product or component type | Distribution board   |
| Device application        | Distribution   |
| Enclosure type            | Standard   |
| Provided equipment        | Earth stud<br>Enclosure<br>Door<br>Front cover<br>Pan assembly<br>Neutral terminal block<br>Earth terminal block<br>Blanking plate<br>Removable gland plates |
| Colour                    | Cream (RAL 9001)   |

### Complementary

|  |   |
|--|---|
| Enclosure mounting                     | Surface   |
| Poles description                      | 3P + N  |
| [Ie] rated operational current         | 250 A at 400/415 V AC<br>250 A at 230/240 V AC                        |
| Breaking capacity                      | 25 kA   |
| Overvoltage category                   | IV  |
| [Ui] rated insulation voltage          | 500 V   |
| [Uimp] rated impulse withstand voltage | 6 kV  |
| Incomer device options                 | Switch disconnecter - 3P + N<br>Switch disconnecter - 4P<br>MCCB - 4P |

Terminal block - 4P  
Contactor - 4P  
RCCB - 4P

|                                      |  |
|--------------------------------------|--|
| Protection device options at outgoer | Miniature circuit breaker (MCB) 63 A<br>Residual current circuit breaker with overcurrent protection (RCBO) 45 A 100 mA<br>Residual current circuit breaker with overcurrent protection (RCBO PoN) 45 A 100 mA |
| Number of ways                       | 18 ways (3P) outgoer   |
| Enclosure material                   | Steel  |
| Surface treatment                    | Epoxy  |
| Surface finish                       | Powder paint   |
| Height                               | 862 mm   |
| Width                                | 470 mm   |
| Depth                                | 139 mm   |
| Net weight                           | 16.2 kg  |

## Environment

|                                       |   |
|---------------------------------------|---|
| Standards                             | BS EN 61439-3   |
| IP degree of protection               | IP2x without cover internal conforming to BS EN 60529<br>IP3x with cover external conforming to BS EN 60529 |
| IK degree of protection               | IK05  |
| Ambient air temperature for operation | -35...70 °C   |
| Ambient air temperature for storage   | -40...80 °C   |

## Packing Units

|                              |          |
|------------------------------|----------|
| Unit Type of Package 1       | PCE      |
| Number of Units in Package 1 | 1        |
| Package 1 Weight             | 18.58 kg |
| Package 1 Height             | 15 cm    |
| Package 1 width              | 48.5 cm  |
| Package 1 Length             | 86 cm    |

## Offer Sustainability

|                             |   |
|-----------------------------|---|
| Sustainable offer status    | Green Premium product   |
| REACH Regulation            | <a href="#">REACH Declaration</a>   |
| EU RoHS Directive           | Pro-active compliance (Product out of EU RoHS legal scope)<br><a href="#">EU RoHS Declaration</a>                     |
| Mercury free                | Yes   |
| RoHS exemption information  | <a href="#">Yes</a>   |
| China RoHS Regulation       | <a href="#">China RoHS declaration</a><br>Product out of China RoHS scope. Substance declaration for your information |
| Environmental Disclosure    | <a href="#">Product Environmental Profile</a>   |
| Halogen content performance | Halogen free plastic parts product  |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|