

Slotted Panel Trunking T1



Material: PVC
 Color: grey
 Delivery Length: 2m
 Dimensions: 28

- temperature-resistant - 45°C to + 60°C
- certified according to EN 50085-2-3
- base holes according to EN 50085
- material self-extinguishing according to UL94 V0
- UL listed File-Nr.: E66583
- CSA listed File-Nr.: 040464

Dimension Overview



Order Code	Article	Height [mm]	Width [mm]	Pack. QTY [m]
B00670	T1 15X18	18	15	72
B00672	T1 15X30	30	15	64
B00126	T1 25X30	30	25	72
B00674	T1 15X40	40	15	48
B00128	T1 25X40	40	25	72
B00134	T1 40X40	40	40	40
B00135	T1 60X40	40	60	24
B00163	T1 80X40	40	80	24
B00165	T1 100X40	40	100	16
B00676	T1 15X60	60	15	32
B00136	T1 25X60	60	25	48
B00107	T1 40X60	60	40	36
B00108	T1 60X60	60	60	24
B00139	T1 80X60	60	80	24
B00140	T1 100X60	60	100	16
B00142	T1 120X60	60	120	16

Order Code	Article	Height [mm]	Width [mm]	Pack. QTY [m]
B00146	T1-F 25X80	80	25	48
B00149	T1-F 40X80	80	40	32
B00151	T1-F 60X80	80	60	24
B00152	T1-F 80X80	80	80	24
B00153	T1-F 100X80	80	100	16
B00159	T1-F 120X80	80	120	16
B00141	T1-F 25X100	100	25	16
B00161	T1-F 40X100	100	40	16
B00162	T1-F 60X100	100	60	8
B00170	T1-F 80X100	100	80	8
B00171	T1-F 100X100	100	100	8
B00172	T1-F 150X100	100	150	8

Suffix „F“: Retaining Nose



Base Pattern

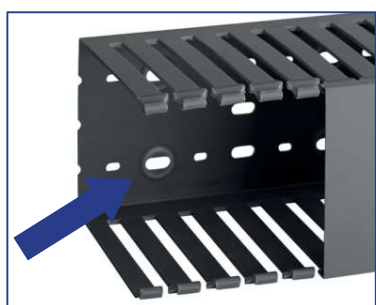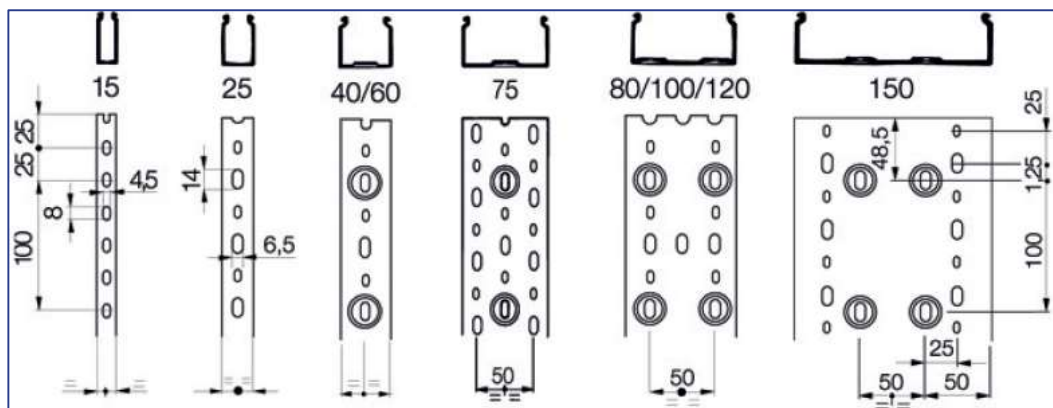


Recessed embossing
→ quick&easy use of accessories

Sidewall Pattern



Two preterminded scorelines:
1) break sidewall finger only
2) removal of sidewall in full

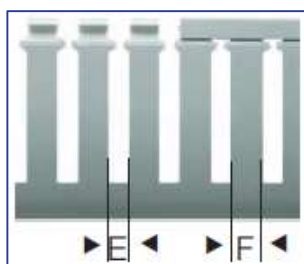

Base	E [mm]	F [mm]
15 mm + T1 25x30	5	7,5
25 mm – 150 mm	8	12

Section

Article	Section [mm ²]
T1 15x18	200
T1 15x30	340
T1 25x30	610
T1 15x40	460
T1 25x40	820
T1 40x40	1360
T1 60x40	1970
T1 80x40	2680
T1 100x40	3380
T1 15x60	680
T1 25x60	1190
T1 40x60	2040
T1 60x60	3080
T1 80x60	4150
T1 100x60	5250
T1 120x60	6300
T1-F 25x80	1550
T1-F 40x80	2700
T1-F 60x80	4140
T1-F 80x80	5660
T1-F 100x80	7150
T1-F 120x80	8630
T1-F 25x100	2300
T1-F 40x100	3310
T1-F 60x100	5140
T1-F 80x100	7020
T1-F 100x100	8920
T1-F 150x100	13570