

Slotted Panel Trunking T1-E




Material: PVC
 Color: grey
 Delivery Length: 2m
 Dimensions: 22

- temperature-resistant - 45°C to + 60°C
- certified according to EN 50085-2-3
- base holes according to EN 50085
- material self-extinguishing according to UL94 V0
- UL listed File-Nr.: E66583
- CSA listed File-Nr.: 040464



Dimension Overview

Order Code	Article	Height [mm]	Width [mm]	Pack. QTY [m]	Order Code	Article	Height [mm]	Width [mm]	Pack. QTY [m]
B01163	T1-E 25X40	40	25	72	B01126	T1-EF 25X80	80	25	48
B01134	T1-E 40X40	40	40	40	B01127	T1-EF 40X80	80	40	32
B01135	T1-E 60X40	40	60	24	B01128	T1-EF 60X80	80	60	24
B01153	T1-E 80X40	40	80	24	B01129	T1-EF 80X80	80	80	24
B01155	T1-E 100X40	40	100	16	B01130	T1-EF 100X80	80	100	16
B01166	T1-E 25X60	60	25	48	B01131	T1-EF 120X80	80	120	16
B01107	T1-E 40X60	60	40	36	B01148	T1 EF 25x100	100	25	16
B01108	T1-E 60X60	60	60	24	B01120	T1-EF 40X100	100	40	16
B01139	T1-E 80X60	60	80	24	B01121	T1-EF 60X100	100	60	8
B01140	T1-E 100X60	60	100	16	B01122	T1-EF 80X100	100	80	8
B01141	T1-E 120X60	60	120	16	B01132	T1-EF 100X100	100	100	8

Suffix „F“: Retaining Nose




Base Pattern

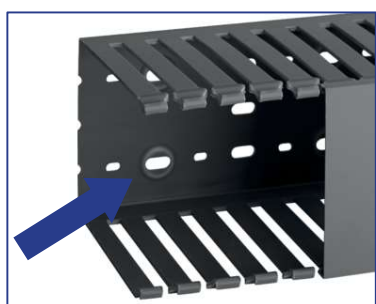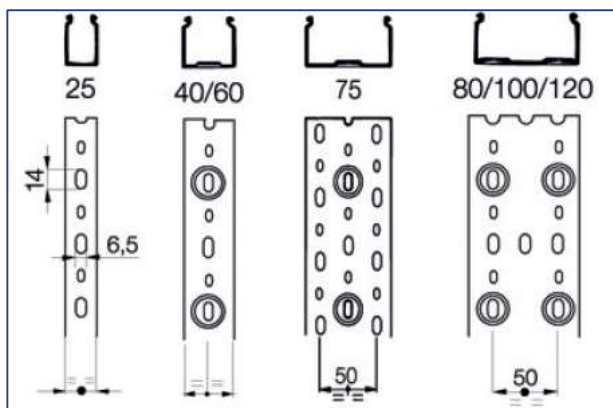


Recessed embossing
→ quick&easy use of accessories

Sidewall Pattern



Two preterminded scorelines:
1) break sidewall finger only
2) removal of sidewall in full



Base	E [mm]	F [mm]
For all bases	4	6

Section

Article	Section [mm ²]
T1-E 25X40	820
T1-E 40X40	1360
T1-E 60X40	1970
T1-E 80X40	2680
T1-E 100X40	3380
T1-E 25X60	1190
T1-E 40X60	2040
T1-E 60X60	3080
T1-E 80X60	4150
T1-E 100X60	5250
T1-E 120X60	6300
T1-EF 25X80	1550
T1-EF 40X80	2700
T1-EF 60X80	4140
T1-EF 80X80	5660
T1-EF 100X80	7150
T1-EF 120X80	8630
T1 EF 25x100	2300
T1-EF 40X100	3310
T1-EF 60X100	5140
T1-EF 80X100	7020
T1-EF100X100	8920