



Main

| | |
|---|---|
| Range | TeSys |
| Product name | TeSys D |
| Product or component type | Contactor |
| Device short name | LC1D |
| Contactor application | Resistive load Motor control |
| Utilisation category | AC-4 AC-1 AC-3 |
| Poles description | 3P |
| Pole contact composition | 3 NO |
| [Ue] rated operational voltage | Power circuit: \leq 690 V AC 25...400 Hz Power circuit: \leq 300 V DC |
| [Ie] rated operational current | 32 A (at \leq 60 °C) at \leq 440 V AC AC-3 for power circuit 50 A (at \leq 60 °C) at \leq 440 V AC AC-1 for power circuit |
| Motor power kW | 7.5 KW at 220...230 V AC 50/60 Hz (AC-3) 15 KW at 380...400 V AC 50/60 Hz (AC-3) 15 KW at 415...440 V AC 50/60 Hz (AC-3) 18.5 KW at 500 V AC 50/60 Hz (AC-3) 18.5 KW at 660...690 V AC 50/60 Hz (AC-3) 7.5 KW at 400 V AC 50/60 Hz (AC-4) |
| Motor power hp | 2 Hp at 115 V AC 50/60 Hz for 1 phase motors 5 Hp at 230/240 V AC 50/60 Hz for 1 phase motors 7.5 Hp at 200/208 V AC 50/60 Hz for 3 phases motors 10 Hp at 230/240 V AC 50/60 Hz for 3 phases motors 20 Hp at 460/480 V AC 50/60 Hz for 3 phases motors 30 Hp at 575/600 V AC 50/60 Hz for 3 phases motors |
| Control circuit type | AC at 50/60 Hz |
| [Uc] control circuit voltage | 48 V AC 50/60 Hz |
| Auxiliary contact composition | 1 NO + 1 NC |
| [Uimp] rated impulse withstand voltage | 6 KV conforming to IEC 60947 |
| Overvoltage category | III |
| [Ith] conventional free air thermal current | 10 A (at 60 °C) for signalling circuit 50 A (at 60 °C) for power circuit |
| Irms rated making capacity | 140 A AC for signalling circuit conforming to IEC 60947-5-1 250 A DC for signalling circuit conforming to IEC 60947-5-1 550 A at 440 V for power circuit conforming to IEC 60947 |
| Rated breaking capacity | 550 A at 440 V for power circuit conforming to IEC 60947 |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

| | |
|--|---|
| [Icw] rated short-time withstand current | 260 A 40 °C - 10 s for power circuit 430 A 40 °C - 1 s for power circuit 60 A 40 °C - 10 min for power circuit 138 A 40 °C - 1 min for power circuit 100 A - 1 s for signalling circuit 120 A - 500 ms for signalling circuit 140 A - 100 ms for signalling circuit |
| Associated fuse rating | 10 A gG for signalling circuit conforming to IEC 60947-5-1 63 A gG at <= 690 V coordination type 1 for power circuit 63 A gG at <= 690 V coordination type 2 for power circuit |
| Average impedance | 2 MOhm - Ith 50 A 50 Hz for power circuit |
| [Ui] rated insulation voltage | Power circuit: 690 V conforming to IEC 60947-4-1 Power circuit: 600 V CSA certified Power circuit: 600 V UL certified Signalling circuit: 690 V conforming to IEC 60947-1 Signalling circuit: 600 V CSA certified Signalling circuit: 600 V UL certified |
| Electrical durability | 1.65 Mcycles 32 A AC-3 at Ue <= 440 V 1.4 Mcycles 50 A AC-1 at Ue <= 440 V |
| Power dissipation per pole | 2 W AC-3 5 W AC-1 |
| Protective cover | With |
| Mounting support | Rail Plate |
| Standards | CSA C22.2 No 14 EN 60947-4-1 EN 60947-5-1 IEC 60947-4-1 IEC 60947-5-1 UL 508 |
| Product certifications | LROS (Lloyds register of shipping) GL GOST RINA DNV CCC UL BV CSA |
| Connections - terminals | Control circuit: screw clamp terminals 1 cable(s) 1...4 mm ² flexible without cable end Control circuit: screw clamp terminals 2 cable(s) 1...4 mm ² flexible without cable end Control circuit: screw clamp terminals 1 cable(s) 1...4 mm ² flexible with cable end Control circuit: screw clamp terminals 2 cable(s) 1...2.5 mm ² flexible with cable end Control circuit: screw clamp terminals 1 cable(s) 1...4 mm ² solid without cable end Control circuit: screw clamp terminals 2 cable(s) 1...4 mm ² solid without cable end Power circuit: screw clamp terminals 1 cable(s) 2.5...10 mm ² flexible without cable end Power circuit: screw clamp terminals 2 cable(s) 2.5...10 mm ² flexible without cable end Power circuit: screw clamp terminals 1 cable(s) 1...10 mm ² flexible with cable end Power circuit: screw clamp terminals 2 cable(s) 1.5...6 mm ² flexible with cable end Power circuit: screw clamp terminals 1 cable(s) 1.5...10 mm ² solid without cable end Power circuit: screw clamp terminals 2 cable(s) 2.5...10 mm ² solid without cable end |
| Tightening torque | Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver Philips No 2 Power circuit: 2.5 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm Power circuit: 2.5 N.m - on screw clamp terminals - with screwdriver Philips No 2 |
| Operating time | 12...22 ms closing 4...19 ms opening |
| Safety reliability level | B10d = 1369863 cycles contactor with nominal load conforming- to EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load conforming- to EN/ISO 13849-1 |
| Mechanical durability | 15 Mcycles |
| Maximum operating rate | 3600 Cyc/H 60 °C |

Complementary

| | |
|---------------------------------|---|
| Coil technology | Without built-in suppressor module |
| Control circuit voltage limits | 0.3...0.6 U _c (-40...70 °C):drop-out AC 50/60 Hz 0.8...1.1 U _c (-40...60 °C):operational AC 50 Hz 0.85...1.1 U _c (-40...60 °C):operational AC 60 Hz 1...1.1 U _c (60...70 °C):operational AC 50/60 Hz |
| Inrush power in VA | 70 VA 60 Hz cos phi 0.75 (at 20 °C) 70 VA 50 Hz cos phi 0.75 (at 20 °C) |
| Hold-in power consumption in VA | 7.5 VA 60 Hz cos phi 0.3 (at 20 °C) 7 VA 50 Hz cos phi 0.3 (at 20 °C) |
| Heat dissipation | 2...3 W at 50/60 Hz |
| Auxiliary contacts type | Type mechanically linked 1 NO + 1 NC conforming to IEC 60947-5-1 type mirror contact 1 NC conforming to IEC 60947-4-1 |
| Signalling circuit frequency | 25...400 Hz |
| Minimum switching current | 5 MA for signalling circuit |
| Minimum switching voltage | 17 V for signalling circuit |
| Non-overlap time | 1.5 Ms on de-energisation between NC and NO contact 1.5 Ms on energisation between NC and NO contact |
| Insulation resistance | > 10 MOhm for signalling circuit |
| Contact compatibility | M2 |
| Compatibility code | LC1D |
| Power range | 7...11 KW at 200...240 V 3 phases 15...25 KW at 380...440 V 3 phases 15...25 KW at 480...500 V 3 phases |
| Motor starter type | Direct on-line contactor |
| Contactor coil voltage | 48 V AC standard |

Environment

| | |
|---------------------------------------|---|
| IP degree of protection | IP20 front face conforming to IEC 60529 |
| Protective treatment | TH conforming to IEC 60068-2-30 |
| Pollution degree | 3 |
| Ambient air temperature for operation | -40...60 °C 60...70 °C with derating |
| Ambient air temperature for storage | -60...80 °C |
| Operating altitude | 0...3000 m |
| Fire resistance | 850 °C conforming to IEC 60695-2-1 |
| Flame retardance | V1 conforming to UL 94 |
| Mechanical robustness | Vibrations contactor open: 2 Gn, 5...300 Hz Vibrations contactor closed: 4 Gn, 5...300 Hz Shocks contactor closed: 15 Gn for 11 ms Shocks contactor open: 8 Gn for 11 ms |
| Height | 85 Mm |
| Width | 45 Mm |
| Depth | 92 Mm |
| Net weight | 0.375 Kg |

Packing Units

| | |
|------------------|----------|
| Package 1 Weight | 0.420 Kg |
| Package 1 Height | 0.500 Dm |
| Package 1 width | 0.920 Dm |
| Package 1 Length | 1.120 Dm |


Offer Sustainability

| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Compliant EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS Declaration |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End Of Life Information |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| PVC free | Yes |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

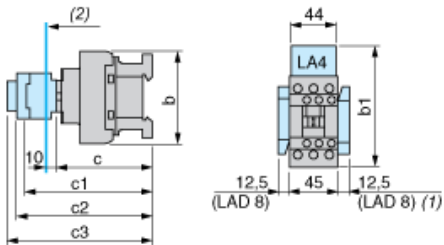

- (1) Including LAD 4BB
(2) Minimum electrical clearance

| LC1 | | D25...D38 (3-pole) |
|-----|------------------------------------|--------------------|
| b | without add-on blocks | 85 |
| b1 | with LAD 4BB | 98 |
| | with LA4 D•2 | 114 ⁽¹⁾ |
| | with LA4 DF, DT | 123 ⁽¹⁾ |
| | with LA4 DW, DL | 130 ⁽¹⁾ |
| c | without cover or add-on blocks | 90 |
| | with cover, without add-on blocks | 92 |
| c1 | with LAD N or C (2 or 4 contacts) | 123 |
| c2 | with LA6 DK10, LAD 6K10 | 135 |
| c3 | with LAD T, R, S | 143 |
| | with LAD T, R, S and sealing cover | 147 |
| (1) | Including LAD 4BB. | |

Wiring



| | |
|-----------------------|----------------|
| Product Life Status : | Commercialised |
|-----------------------|----------------|