

ARCA 405021



Sample image

Order symbol: ARCA 405021

Product nbr: 8120025

Description: Cabinet. PC


Remarks: Grey cover. 2-point locking. hinges on the short side

EAN: 6418074079367

El. number:

- Finland: 3423123
- Denmark: 8212091236
- Sweden: 2500115

Including: Cabinet base. door with PUR gasket. mounting plate. screws for mounting plate. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

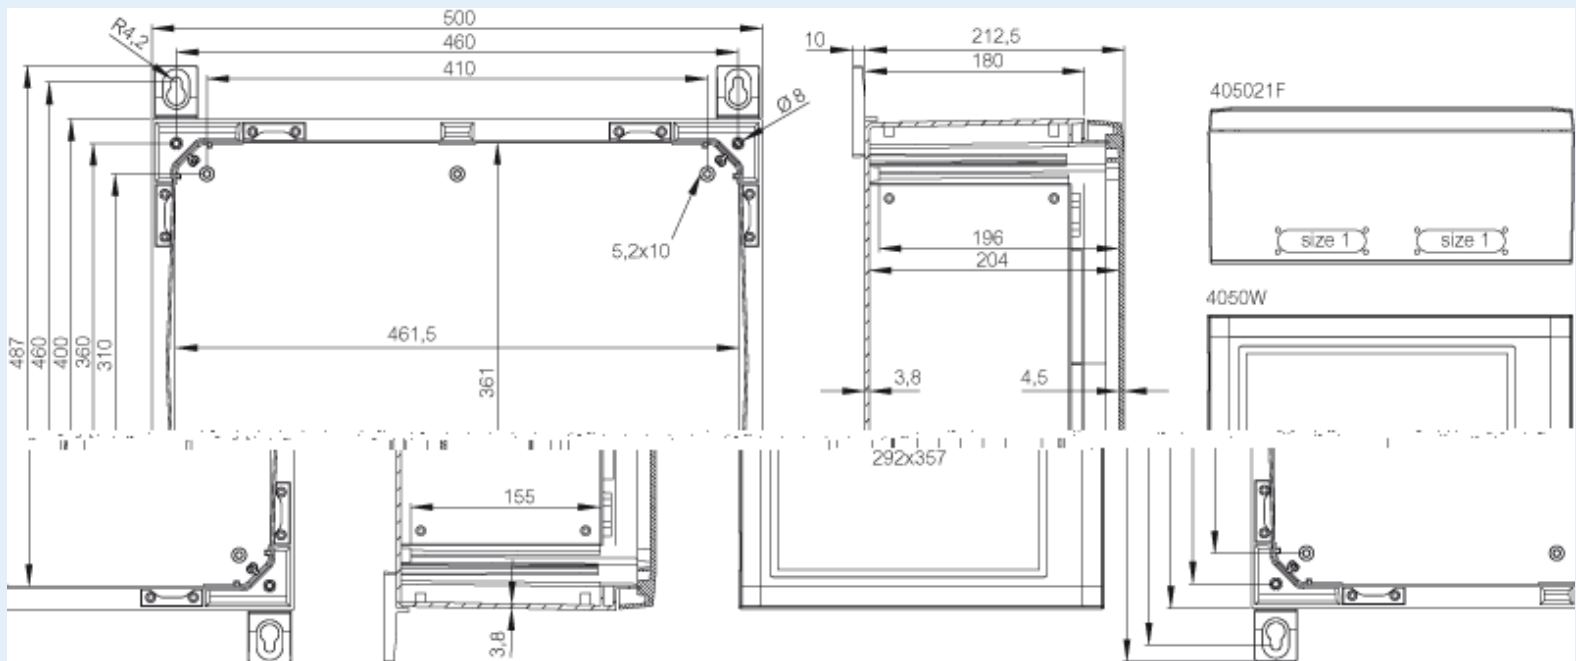

Dimensions:	Height	Width	Depth
mm:	400	500	210
inch:	15.75	19.69	8.58

Materials:

Material: Polycarbonate
Base colour: RAL 7035 -light grey

Accessories:

SBK ARCA 50	Support bar kit (435 x 40 x 30)
MPX ARCA 5040	Mounting plate (450x350 mm) (450 x 350 x 5)
MPMP ARCA 5040	Mounting plate multiperforated (450x350x2 mm - ø3.6 mm) (450 x 350 x 2)
DSP ARCA HRS	Door stopper ARCA. horizontal. right. small

Cover colour: RAL 7035 -light grey
Gasket material: Polyurethane

Temperatures:

Temperature °C (short term):: -40 ... 120
Temperature °C (continuous): -40 ... 80
Temperature °F (short term): -40 ... 250
Temperature °F (continuous): -40 ... 175

DRS ARCA 405021 DIN rail frame set (485 x 385 x 35)
DSP ARCA HLS Door stopper ARCA. horizontal. left. small
SBK ARCA 40 Support bar kit (340 x 40 x 30)
MPP ARCA 4050 Mounting plate perforated (450x350x2 mm - 26x11 mm) (350 x 450 x 2)
MPS ARCA 5040 Mounting plate (450x350x2 mm) (450 x 350 x 2)
PMK ARCA 50 PoleMounting kit. for pole ø100-300mm (485 x 385 x 35)
IDS ARCA 4050 Inner door set (385 x 285 x 35)
RCS ARCA 4050 Rain canopy set for size 4050 (20 x 500 x 30)

Rating:

Ingress protection (EN 60529): IP66;
Impact Resistance (EN 62262): IK10;
Electrical insulation: Totally insulated
Halogen free (DIN/VDE 0472, Part 815): 1
UV resistance: UL 508
Flammability Rating: UL 94 5VA
Glow Wire Test (IEC 695-2-1) °C: 960 °C
NEMA Class NEMA 1, 4, 4X, 12 and 13

Certificates:

Certificate FI 40467