

CAB PC 302018 G



Sample image

Order symbol: CAB PC 302018 G

Product nbr: 8113330

UL Code: 8143330

UL Name: UL CAB PC 302018 G

Description: Opaque door


Remarks: Latches on the long side

EAN: 6418074020000

El. number:

- Finland: 3424101
- Denmark: 821202027
- Sweden: 2539961

Including: Cabinet base. door with PUR gasket. latches. screws for mounting plate/ DIN-rail and corner plugs.

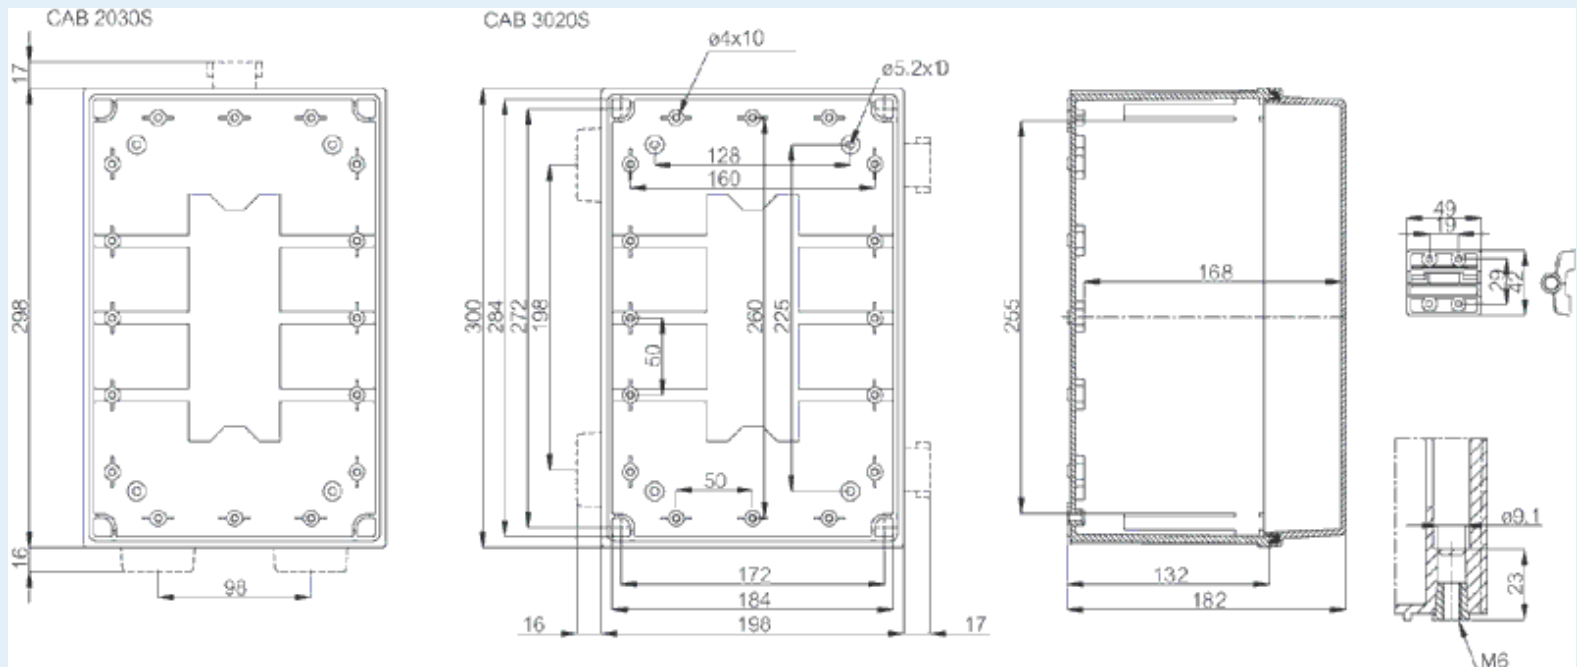

Dimensions:	Height	Width	Depth
mm:	300	200	180
inch:	11.81	7.87	7.09

Accessories:

- MB 12225 AL Swing door kit
- EKIV 27 DIN-35 Mounting rail. for enclosures: (266 x 35 x 1)
- DRF 23 DIN rail frame kit. for enclosures:

Materials:

Material:	Polycarbonate
Base colour:	RAL 7035 -light grey
Cover colour:	RAL 7035 -light grey
Gasket material:	Polyurethane

FP A 23	Swing-out door/Front panel (aluminum). for enclosures: (168 x 268 x 1)
EKIV 17	DIN-35 Mounting rail. for enclosures: (166 x 35 x 1)
EKIV 23	Back Panel. for enclosures: (170 x 270 x 1)

Temperatures:

Temperature °C (short term)::	-40 ... 120
Temperature °C (continuous):	-40 ... 80
Temperature °F (short term):	-40 ... 250
Temperature °F (continuous):	-40 ... 175

Rating:

Ingress protection (EN 60529):	IP65;
Impact Resistance (EN 62262):	IK08;
Electrical insulation:	Totally insulated
Halogen free (DIN/VDE 0472, Part 815):	1
UV resistance:	UL 508
Flammability Rating:	UL 746C 5"
Glow Wire Test (IEC 695-2-1) °C:	960 °C
NEMA Class	

Certificates:

Certificate FI 40854