


# Product datasheet

Specifications

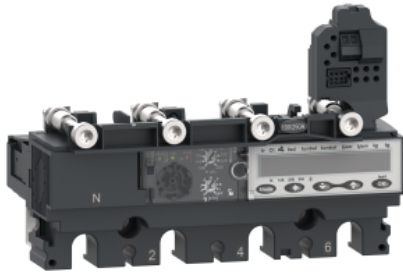

trip unit MicroLogic 6.2 E for  
ComPacT NSX 100/160/250 circuit  
breakers, electronic, rating 100A, 4  
poles 4d

C1046E100

## Main

Range	ComPacT new generation
Range of product	ComPacT NSX100...250 new generation
Product or component type	Control unit
Trip unit name	Micrologic 6.2 E
Trip unit technology	Electronic
Range compatibility	ComPacT new generation NSX100 ComPacT new generation NSX160 ComPacT new generation NSX250
Device application	Distribution
Poles description	4P
Protected poles description	3t + OSN 4t 3t + N/2 3t
Neutral position	Left
Trip unit protection functions	LSIG
Protection type	L : for overload protection (long time) S : for short time short-circuit protection I : for instantaneous short-circuit protection G : for ground fault protection
Trip unit rating	100 A at 40 °C
[Ue] rated operational voltage	690 V AC 50/60 Hz
Network type	AC
Network frequency	50/60 Hz
Circuit breaker mounting mode	Fixed

## Complementary

Long-time pick-up adjustment type Ir (thermal protection)	Adjustable 9 settings
[Ir] long-time protection pick-up adjustment range	40...100 A
Long-time protection delay adjustment type tr	Adjustable
[Tr] long-time protection delay adjustment range	15...400 s at 1.5 x Ir 0.35...11 s at 7.2 x Ir 0.5...16 s at 6 x Ir

<b>Thermal memory</b>	20 minutes before and after tripping
<b>Short-time protection pick-up adjustment type Isd</b>	Adjustable 9 settings
<b>[Isd] Short-time protection pick-up adjustment range</b>	1.5...10 x Ir
<b>Short-time protection delay adjustment type tsd</b>	Adjustable
<b>[Tsd] Short-time protection delay adjustment range</b>	0...0.4 s I <sup>2</sup> t=off 0.1...0.4 s I <sup>2</sup> t=on
<b>Instantaneous protection pick-up adjustment type li</b>	Adjustable
<b>[li] instantaneous protection pick-up adjustment range</b>	1.5...12 x In Compact NSX250 1.5...15 x In Compact NSX100 1.5...15 x In Compact NSX160
<b>Ground-fault protection pick-up adjustment type Ig</b>	Adjustable
<b>[Ig] ground-fault protection pick-up adjustment range</b>	0.2...1 x In for In = 40 A 0.4...1 x In for In > 40 A Ig enable on/off
<b>Ground-fault protection time delay adjustment type tg</b>	Adjustable
<b>[Tg] ground-fault protection time delay adjustment range</b>	0...0.4 s I <sup>2</sup> t=off 0.1...0.4 s I <sup>2</sup> t=on
<b>Earth-leakage protection</b>	Without
<b>Neutral protection settings</b>	0.5 x Ir (3t + N/2) 1 x Ir (4t) 1.6 x Ir (3t + OSN) No protection (3t)
<b>Zone selective interlocking ZSI</b>	With
<b>Local signalling</b>	Flashing LED (green) for ready to operate LED 105 % Ir (red) for overload LED 90 % Ir (orange) for overload
<b>Display type</b>	LCD display
<b>Type of measurement</b>	Energy meter
<b>Communication of data</b>	Power quality Demand current and power Instantaneous and demand values Maximeters/minimeters Protection and alarm settings Time-stamped histories and event tables Energy metering Maintenance indicators
<b>Electrical data recording</b>	Maintenance indicators

## Environment

<b>Standards</b>	EN/IEC 60947-2 UL 508
<b>Product certifications</b>	EAC Marine CCC
<b>Pollution degree</b>	3 conforming to IEC 60947-1
<b>Ambient air temperature for operation</b>	-25...70 °C
<b>Ambient air temperature for storage</b>	-40...85 °C

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1

Package 1 Weight	672.0 g
Package 1 Height	9.5 cm
Package 1 width	11 cm
Package 1 Length	15 cm
Unit Type of Package 2	S03
Number of Units in Package 2	11
Package 2 Weight	7.842 kg
Package 2 Height	30 cm
Package 2 width	30 cm
Package 2 Length	40 cm
Package 3 Height	150 cm

## Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information

## Contractual warranty

Warranty	18 months
----------	-----------