


# Product datasheet

Specifications

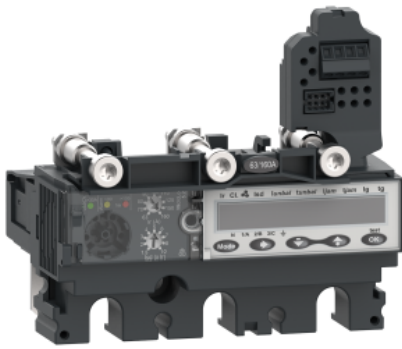

trip unit MicroLogic 5.2 E for  
ComPacT NSX 250 circuit breakers,  
electronic, rating 250A, 3 poles 3d

C2535E250

## Main

Range	ComPacT new generation
Range of product	ComPacT NSX100...250 new generation
Product or component type	Control unit
Trip unit name	Micrologic 5.2 E
Trip unit technology	Electronic
Range compatibility	ComPacT new generation NSX250
Device application	Distribution
Poles description	3P
Protected poles description	3t
Trip unit protection functions	LSI
Protection type	L : for overload protection (long time) S : for short time short-circuit protection I : for instantaneous short-circuit protection
Trip unit rating	250 A at 40 °C
[Ue] rated operational voltage	690 V AC 50/60 Hz
Network type	AC
Network frequency	50/60 Hz
Circuit breaker mounting mode	Fixed

## Complementary

Long-time pick-up adjustment type Ir (thermal protection)	Adjustable 9 settings
[Ir] long-time protection pick-up adjustment range	100...250 A
Long-time protection delay adjustment type tr	Adjustable
[Tr] long-time protection delay adjustment range	15...400 s at 1.5 x Ir 0.35...11 s at 7.2 x Ir 0.5...16 s at 6 x Ir
Thermal memory	20 minutes before and after tripping
Short-time protection pick-up adjustment type Isd	Adjustable 9 settings
[Isd] Short-time protection pick-up adjustment range	1.5...10 x Ir

Short-time protection delay adjustment type tsd	Adjustable
[Tsd] Short-time protection delay adjustment range	0...0.4 s I <sup>2</sup> t=off 0.1...0.4 s I <sup>2</sup> t=on
Instantaneous protection pick-up adjustment type li	Adjustable
[li] instantaneous protection pick-up adjustment range	1.5...12 x I <sub>n</sub>
Earth-leakage protection	Without
Zone selective interlocking ZSI	With
Local signalling	Flashing LED (green) for ready to operate LED 105 % I <sub>r</sub> (red) for overload LED 90 % I <sub>r</sub> (orange) for overload
Display type	LCD display
Type of measurement	Energy meter
Communication of data	Instantaneous and demand values Maintenance indicators Power quality Energy metering Maximeters/minimeters Demand current and power Protection and alarm settings Time-stamped histories and event tables
Electrical data recording	Maintenance indicators

## Environment

Standards	EN/IEC 60947-2 UL 508
Product certifications	CCC Marine EAC
Pollution degree	3 conforming to IEC 60947-1
Ambient air temperature for operation	-25...70 °C
Ambient air temperature for storage	-40...85 °C

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	556.0 g
Package 1 Height	9.5 cm
Package 1 width	11 cm
Package 1 Length	15 cm
Unit Type of Package 2	S03
Number of Units in Package 2	11
Package 2 Weight	6.558 kg
Package 2 Height	30 cm
Package 2 width	30 cm
Package 2 Length	40 cm

## Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
------------------	-----------------------------------

---

<b>EU RoHS Directive</b>	Compliant <a href="#">EU RoHS Declaration</a>
<b>Mercury free</b>	Yes
<b>RoHS exemption information</b>	<a href="#">Yes</a>
<b>China RoHS Regulation</b>	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information

---

### **Contractual warranty**

---

<b>Warranty</b>	18 months
-----------------	-----------

---