


connection terminal, front connection (01198)

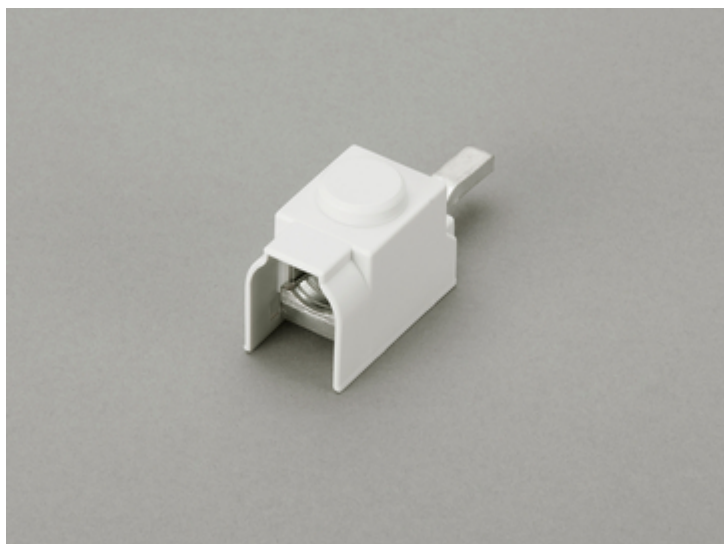

The picture may show a similar product.

Description

Part No.: 01198

connection terminal, front connection

25 - 95 mm²

for 31057

System

Accessories

Product group 07

Subgroup 26

pack size 3

EAN 4021267011987

catalog page 2020 : 6.2, 6.4, 6.8

ECLASS 6.1 27371390
ECLASS 7.1 27141146
ETIM 4.0 EC000001
ETIM 5.0 EC000001

Approvals

Standards

IEC 61439-1:2011

Approvals

EAC



EAC Type: TE-CT

CCC approval: no certification required

Technical data

Details IEC

Standards

IEC 61439-1:2011

Electrical data IEC

Rated current (IEC): 225 A
rated voltage (IEC) AC: 690 V
max. permitted voltage (IEC) AC: 690 V

max. permitted voltage (IEC) DC: 1000 V

rated surge voltage U_{imp} : 4 kV

The insulation performance of the article depends on the installation conditions.

power dissipation of the article:

The power dissipation at a typical load of 80 % results to 0.0 W.

(The power dissipation at full load would be 0.0 W.)

1000V DC*

*The use of single-pole devices is determined exclusively by the installation conditions with regard to the insulation properties.

Mechanical data

W x H x D: 21 x 34 x 28

weight: 9.0 kg/100

Terminal points

min. cross-section: 25 mm²

max. cross-section: 95 mm²

Not suitable for aluminium cables !

25 - 90mm² round, solid and stranded

25 - 70mm² flexible with wire-end ferrule

Md 19Nm

Reference

Recommended stripping of the insulation on the connection lead approx. 26mm