

# ARCA 406021S



Sample image

**Order symbol :** ARCA 406021S

**Product nr :** 8120106

UL Code : UL508A

**Description :** Cabinet, PC


**Remarks :** Grey cover, Swinghandle, hinges on the short side

**EAN :** 6418074079893

**El. number :**

- Finland : 3423185
- Denmark : 8212091760

**Including :** Cabinet base. door with PUR gasket. mounting plate. screws for mounting plate. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

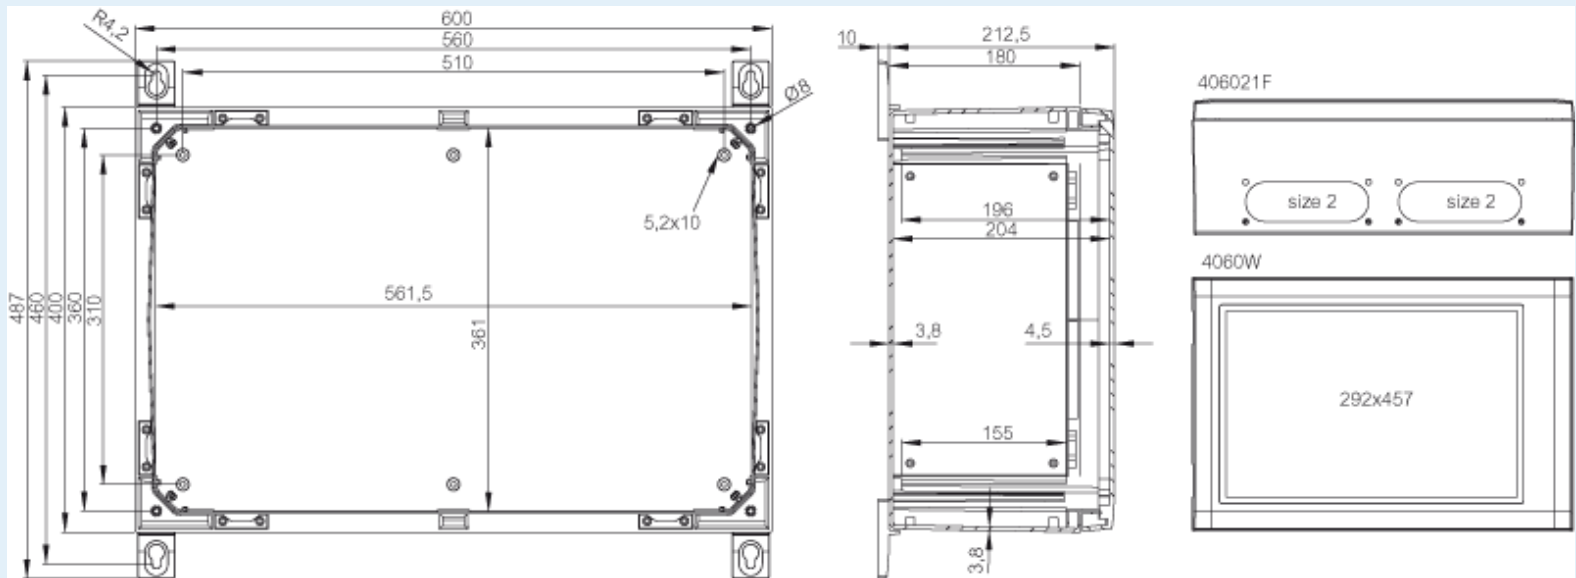

Dimensions :	Height	Width	Depth
mm :	400	600	210
inch :	23.62	15.75	8.58

#### Accessories :

MPS ARCA 6040	Mounting plate (550x350x2 mm) (550 x 350 x 2)
PMK ARCA 60	PoleMounting kit, for pole ø100-300mm (585 x 385 x 35)
MPP ARCA 4060	Mounting plate perforated (550x350x2 mm - 26x11 mm)
DSP ARCA HRS	Door stopper ARCA, horizontal, right, small
IDS ARCA 4060	Inner door set

#### Materials :

Material :	Polycarbonate
Base colour :	RAL_7035
Cover colour :	RAL 7035 -light grey

Gasket material : Polyurethane

**Temperatures :**

Temperature °C (short term) : -40 ... 120

Temperature °C (continuous) : -40 ... 80

Temperature °F (short term) : -40 ... 250

Temperature °F (continuous) : -40 ... 175

DSP ARCA HLS	Door stopper ARCA, horizontal, left, small
SBK ARCA 40	Support bar kit (340 x 40 x 30)
MPMP ARCA 6040	Mounting plate multiperforated (550x350x2 mm - ø3.6 mm)
DRS ARCA 406021	DIN rail frame set (585 x 385 x 35)
MPX ARCA 6040	Mounting plate (550x350 mm)
SBK ARCA 60	Support bar kit (535 x 40 x 30)
RCS ARCA 4060	Rain canopy set for size 4060

**Ratings :**

Ingress protection (EN 60529): IP66;

Impact Resistance (EN 62262): IK10;

electrical\_insulation : Totally insulated

Halogen free (DIN/VDE 0472, Part 815) : Yes

UV resistance : UL 508

Flammability Rating : UL 94 5VA

Glow Wire Test (IEC 695-2-1) °C : 960C

**Certificates :**

Certificate FI 40467