
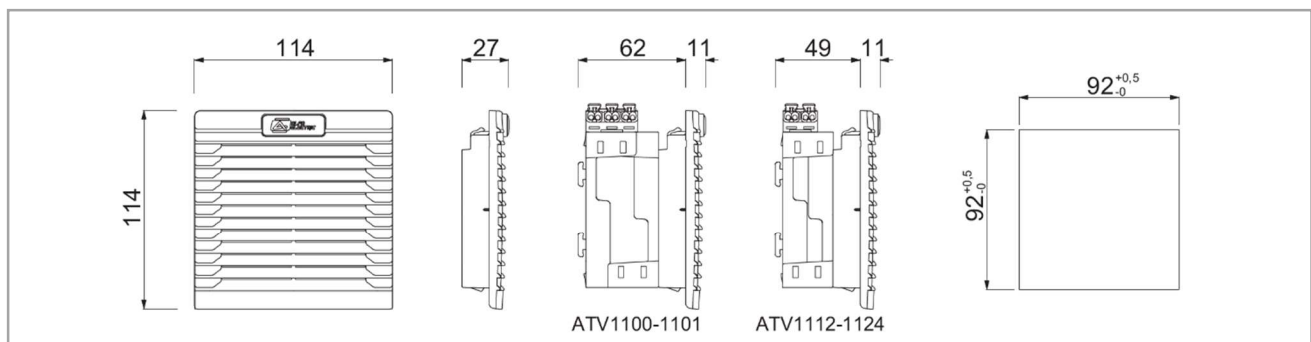




### ATV 11



IP54		ATV1000	ATV1100	ATV1101	ATV1112	ATV1124
Type 12  File n. E301228		ATV1000U	ATV1100U	ATV1101U	ATV1112U	ATV1124U
IP54 UV resistant		ATV1000V	ATV1100V	ATV1101V	ATV1112V	ATV1124V
Air flow rate (free blow)	m3/h	-	26 (30)		26	
Air flow rate with exit filter	m3/h	-	15 (18)		15	
Filter mat EN779	-	G3				
Power supply	V/Hz	-	230 / 50-60	115 / 50-60	12 DC	24 DC
Dimensions HxWxD	mm	114x114x27	114x114x73		114x114x60	
Power consumption	W	-	13 (12)		3	4
Current consumption	A	-	0.10 (0.08)	0.14 (0.12)	0.25	0.16
Overcurrent protection	-	-	impedance			
Electrical connection	-	-	3-poles spring terminals *		2-poles spring terminals *	
Duty cycle	-	-	100%			
Operating temperature	°C (°F)	-	-10 / +70 (+14 / +158)			
Class	-	-	Class I			
Noise level	dB(A)	-	30 (35)		35	
Flow direction	-	-	reversible, default factory setting outside-in			
Bearing	-	-	ball			
Service life (at 40°C)	hr	-	50 000			
Material	-	thermoplastic UL94V-0, color RAL7035				
	-	(IP54 UV resistant): thermoplastic UL94V-0 UV resistant, color RAL7035				
Wall thickness	mm	1.2 - 2.4				
Gasket	-	Foam seal gasket				
Weight (with packaging)	kg	0.09 (0.11)	0.41 (0.46)		0.20 (0.25)	
Package dimensions H x W x D	mm	125x125x35	125x125x80			
Mounting	-	Fast clip-on				
Conformity/Certifications	-	CE				
* 0.5-2.5mm <sup>2</sup>						
<b>Accessories</b>						
Thermostat 0-60°C, NO contact	-				THV2	
Fan speed controller	-	FSC1			-	
Hood for IP56	-	CUFF10B				



Specifications, values and drawings are subject to change without notice.