

Product datasheet

Specifications



Socket, separate contact, 10 A, relay type RXM3, screw connector, 250 V AC

Local distributor code:
388198252

RXZE2S114M

EAN Code: 3389119404280

Main

Range Of Product	Harmony Electromechanical Relays Harmony Timer Relays
Device Short Name	RXZ
Product Or Component Type	Socket
Product Compatibility	Plug-in relay RXM with 4 C/O contact Plug-in relay REXL with 4 C/O contact
Contacts Type And Composition	4 C/O
[Ith] Conventional Free Air Thermal Current	10 A

Complementary

Shape Of Pin	Flat
[Ue] Rated Operational Voltage	< 250 V
Contact Terminal Arrangement	Separate
Connections - Terminals	Connector, 1 x 0.25...1 x 2.5 mm ² (AWG 22...AWG 14) flexible with cable end Connector, 2 x 0.25...2 x 1 mm ² (AWG 22...AWG 17) flexible with cable end Connector, 1 x 0.5...1 x 2.5 mm ² (AWG 20...AWG 14) solid without cable end Connector, 2 x 0.5...2 x 1.5 mm ² (AWG 20...AWG 16) solid without cable end
Tightening Torque	< 1 N.m for M3 screw(s)
Fixing Mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
[Uimp] Rated Impulse Withstand Voltage	4 kV
Overvoltage Category	III
Pollution Degree	3
Sale Per Indivisible Quantity	10
Width	27 mm
Net Weight	0.07 kg

Environment

Ip Degree Of Protection	IP20 conforming to IEC 60529
Dielectric Strength	2500 V
Standards	IEC 61984
Product Certifications	CSA Lloyd's UL
Marking	CE

Ambient Air Temperature For Storage	-40...85 °C
Ambient Air Temperature For Operation	-40...55 °C

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	2.679 cm
Package 1 Width	2.893 cm
Package 1 Length	8.219 cm
Package 1 Weight	62.2 g
Unit Type Of Package 2	BB1
Number Of Units In Package 2	10
Package 2 Height	6.6 cm
Package 2 Width	11.4 cm
Package 2 Length	13.7 cm
Package 2 Weight	664.5 g
Unit Type Of Package 3	S03
Number Of Units In Package 3	200
Package 3 Height	30 cm
Package 3 Width	30 cm
Package 3 Length	40 cm
Package 3 Weight	13.2 kg

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

Reach Free Of Svhc

Toxic Heavy Metal Free

Mercury Free

Rohs Exemption Information Yes

Certifications & Standards

Reach Regulation

[REACH Declaration](#)

Eu Rohs Directive

Pro-active compliance (Product out of EU RoHS legal scope)

[EU RoHS Declaration](#)

China Rohs Regulation

[China RoHS declaration](#)

Environmental Disclosure


[Product Environmental Profile](#)

Circularity Profile

No need of specific recycling operations

Dimensions Drawings

Dimensions

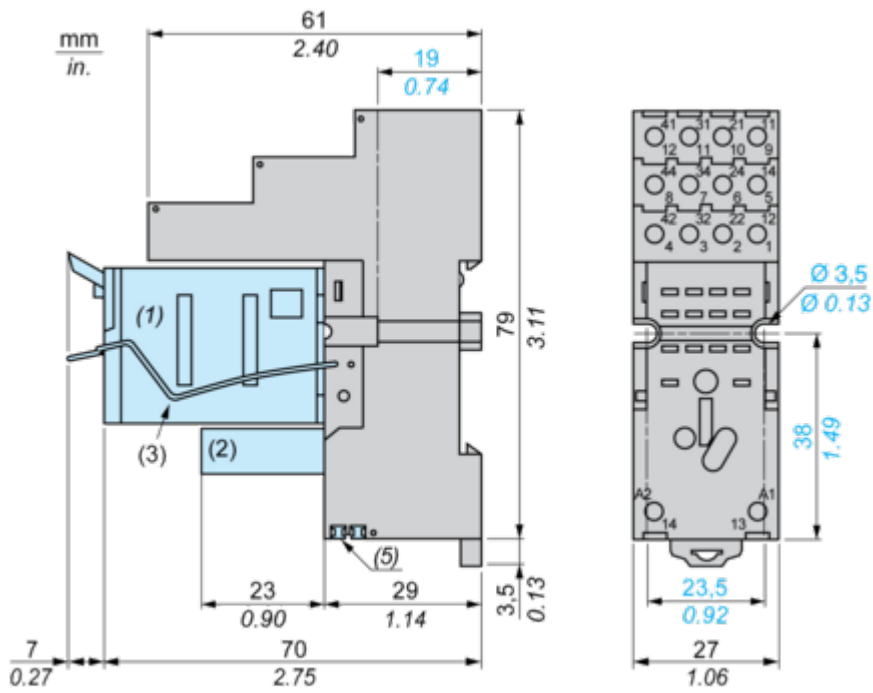

- (1) Relays
- (2) Protection module
- (3) Maintaining clamp
- (4) 2 elongated holes $\text{Ø } 3.5 \text{ mm} \times 6.5 \text{ mm} / \text{Ø } 0.13 \text{ in.} \times 0.25 \text{ in.}$
- (5) 2 bus jumpers

Connections and Schema

Wiring Diagram

