

# Product datasheet

Specifications



## voltage transformer - 230..400 V - 2 x 24 V - 63 VA

Local distributor code:  
389706931

ABT7PDU006B

! Discontinued on: 30 May 2024

! To be end-of-service on: 30 May 2025

! To be discontinued

EAN Code: 3389119401074

### Main

Range Of Product	Modicon Transformer Universal
Product Or Component Type	Safety and isolation transformer
Rated Power In Va	63 VA
Input Voltage	230 V AC single phase, terminal(s): N-L1 400 V AC phase to phase, terminal(s): L1-L2
Output Voltage	24/48 V AC
Secondary Winding	Double
Protective Cover	With
Ambient Air Temperature For Operation	-20...60 °C

### Complementary

Input Voltage Limits	207...253 V 360...440 V
Network Frequency Limits	47...63 Hz
Input Voltage Tolerance	+/- 15 V
Efficiency	83 %
Power Dissipation In W	12.9 W
Voltage Variation At Nominal Load	0,047 at 400 V 4.79 % at 230 V
Output Sustained Overvoltage	0,033 (no load, hot state)
Maximum Voltage Drop At Rated Load	3.88 %
No Load Losses	8.11 W
Short-Circuit Voltage	0,075
Output Protection Type	Against overload, protection technology: with additional protection fuses or circuit-breakers in Selection of Protection Against overvoltage, protection technology: with additional protection fuses or circuit-breakers in Selection of Protection Against short-circuits, protection technology: with additional protection fuses or circuit-breakers in Selection of Protection
Connections - Terminals	For input connection: screw type terminals, connection capacity: 5 x 4 mm <sup>2</sup> AWG 11 For input ground connection: screw type terminals, connection capacity: 1 x 4 mm <sup>2</sup> AWG 11 For output connection: screw type terminals, connection capacity: 4 x 4 mm <sup>2</sup> AWG 11
Marking	CE

<b>Fixing Mode</b>	By 4 screws diameter: 5.5 mm on vertical panel, operating position: horizontal By 4 screws diameter: 5.5 mm on vertical panel, operating position: vertical By clips on 35 x 15 mm symmetrical DIN rail By 4 screws diameter: 5.5 mm on horizontal panel with derating to 90 %
<b>Output Coupling</b>	Parallel Series by internal jumper Grounding of secondary
<b>Operating Altitude</b>	3000 m
<b>Electrical Insulation Class</b>	Class B
<b>Status Led</b>	1 LED (orange) input voltage
<b>Width</b>	87.0 mm
<b>Height</b>	108.0 mm
<b>Depth</b>	115.0 mm
<b>Net Weight</b>	1.95 kg

## Environment

<b>Product Certifications</b>	UR EAC DNV-GL
<b>Standards</b>	UL 506
<b>Ip Degree Of Protection</b>	IP20
<b>Environmental Characteristic</b>	EMC conforming to EN 62041 Safety conforming to EN 61558-1 Safety conforming to EN 61558-2-6
<b>Ambient Air Temperature For Storage</b>	-40...80 °C
<b>Relative Humidity</b>	0...95 % during operation
<b>Overvoltage Category</b>	Class I conforming to VDE 0106-1
<b>Dielectric Strength</b>	3200 V between input and ground 3200 V between output and ground 5100 V between input and output

## Packing Units

<b>Unit Type Of Package 1</b>	PCE
<b>Number Of Units In Package 1</b>	1
<b>Package 1 Height</b>	25.500 cm
<b>Package 1 Width</b>	18.500 cm
<b>Package 1 Length</b>	11.600 cm
<b>Package 1 Weight</b>	2.262 kg
<b>Unit Type Of Package 2</b>	P06
<b>Number Of Units In Package 2</b>	30
<b>Package 2 Height</b>	75.000 cm
<b>Package 2 Width</b>	60.000 cm
<b>Package 2 Length</b>	80.000 cm
<b>Package 2 Weight</b>	80.860 kg

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

## Well-being performance

Mercury Free

Rohs Exemption Information [Yes](#)

Pvc Free

## Certifications & Standards

Reach Regulation [REACH Declaration](#)

Eu Rohs Directive Pro-active compliance (Product out of EU RoHS legal scope)

China Rohs Regulation [China RoHS declaration](#)


Environmental Disclosure [Product Environmental Profile](#)

Circularity Profile No need of specific recycling operations  
[Circularity Profile](#)

Dimensions Drawings

Dimensions

---

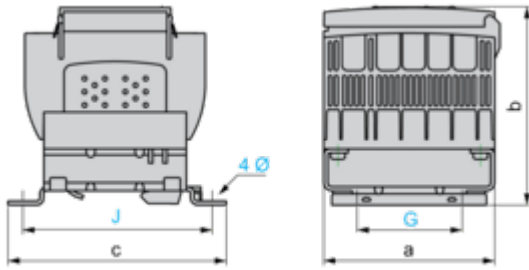

Dimensions in mm

a	b	c	G	J	Ø
87	115	108	60	96	5.5


Dimensions in in.

a	b	c	G	J	Ø
3.42	4.53	4.25	2.36	3.78	0.22

Connections and Schema


Internal Scheme

---

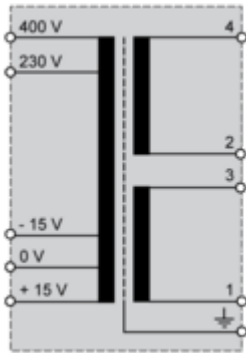


Primary Voltage Wiring

---

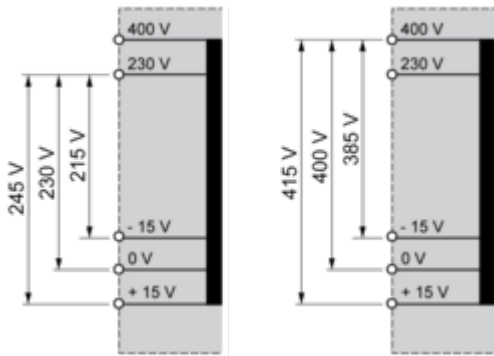

Secondary Voltage Wiring

---

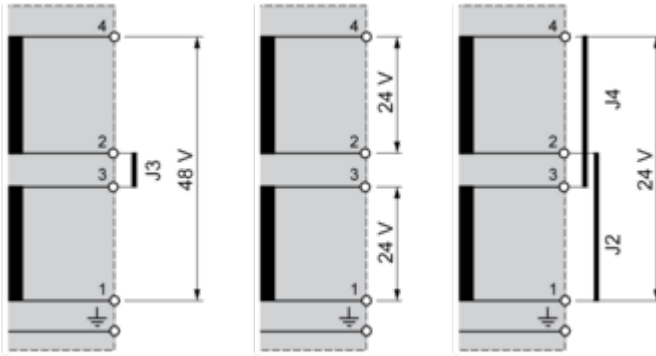

J2, J3, J4 Internal Jumper