

CAB ABS 405020 G



Sample image

Order symbol: CAB ABS 405020 G

EAN: 6418074020406

Product nbr: 8183361

El. number:


Description: Opaque door

- Finland: 3424322
- Denmark: 8212020744
- Sweden: 2540079

Remarks: Latches on the short side

Including: Cabinet base, door with PUR gasket, latches, screws for mounting plate/DIN-rail and corner plugs.

CAB 500x400x200

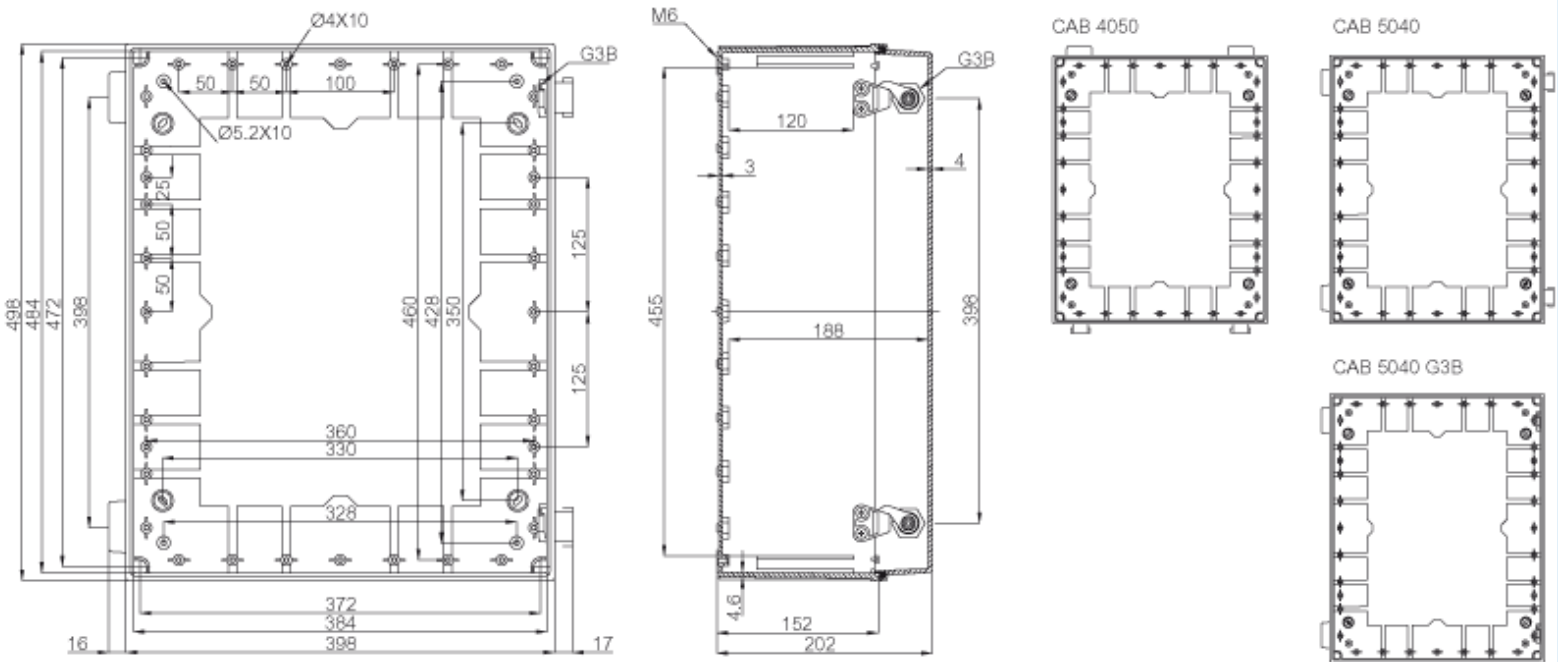

Dimensions:

	Height	Width	Depth
mm:	400	500	200
inch:	15.75	19.69	7.87

Materials:

Material:	ABS
Base colour:	RAL 7035 -light grey
Cover colour:	RAL 7035 -light grey

Rating:

Ingress protection (EN 60529):	IP65;
Impact Resistance (EN 62262):	IK08;
Electrical insulation:	Totally insulated
Halogen free (DIN/VDE 0472, Part 815):	1
UV resistance:	-
Flammability Rating:	UL 94 HB
Glow Wire Test (IEC 695-2-1) °C:	650 °C

Gasket material: Polyurethane

NEMA Class

Temperatures:

Temperature °C (short term)::	-40 ... 80
Temperature °C (continuous):	-40 ... 60
Temperature °F (short term):	-40 ... 175
Temperature °F (continuous):	-40 ... 140

Certificates:

Certificate FI 40854