

EKOE 130 G



Sample image

Order symbol : EKOE 130 G

Product nr : 2538037

Description : Enclosure, PC


Remarks : Grey cover

Including : Flanged Base with screws for mounting plate. cover with PUR gasket and polyamide cover screws.

EAN : 6418074013569

El. number :

- Finland : 3425418
- Denmark : 8212050882
- Sweden : 2538037

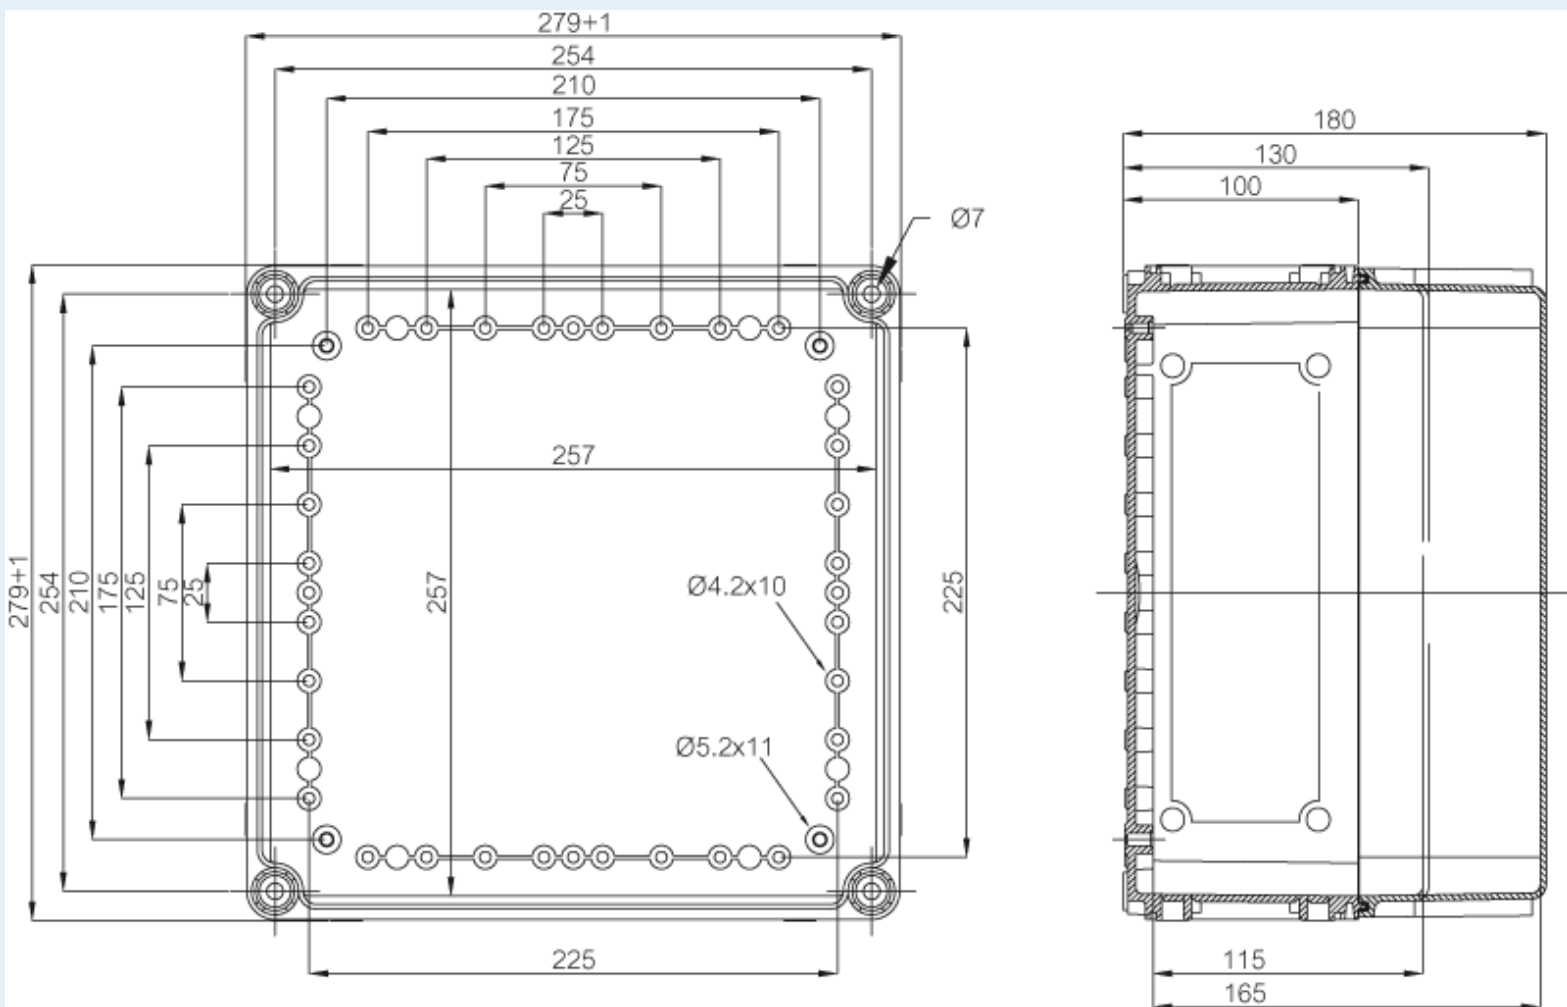

Dimensions :

| | Height | Width | Depth |
|--------|---------------|--------------|--------------|
| mm : | 280 | 280 | 130 |
| inch : | 11.02 | 11.02 | 5.12 |

Materials :

| | |
|-------------------|----------------------|
| Material : | Polycarbonate |
| Base colour : | RAL_7035 |
| Cover colour : | RAL 7035 -light grey |
| Gasket material : | Polyurethane |

Temperatures :

| | |
|-------------------------------|-------------|
| Temperature °C (short term) : | -40 ... 120 |
| Temperature °C (continuous) : | -40 ... 80 |
| Temperature °F (short term) : | -40 ... 250 |
| Temperature °F (continuous) : | -40 ... 175 |

Accessories :

| | |
|--------------|---|
| EKOZR | Extension frame, for enclosures: (280 x 280 x 50) |
| EKV 22 | DIN-35 Mounting rail, for enclosures: (235 x 35 x 7) |
| EKOVT | Mounting plate, for enclosures: (238 x 238 x 1) |
| MPI EKO 2828 | Multiperforated plastic mounting plate (244 x 244 x 4) |

Ratings :

| | |
|---|-------------------|
| Ingress protection (EN 60529): | IP66; IP67; |
| Impact Resistance (EN 62262): | IK08; |
| electrical_insulation : | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes |
| UV resistance : | UL 746C |
| Flammability Rating : | UL 94 V0 |
| Glow Wire Test (IEC 695-2-1) °C : | 960C |

Certificates :

SGSFIMKO_EK