

PC 200/125 XHG



Sample image

Order symbol : PC 200/125 XHG

Product nr : 6013327

UL Name : UL PC 200/125 XHG

Description : Enclosure, PC


Remarks : Extra high base, grey cover

EAN : 6418074021939

El. number :

- Finland : 3421685
- Denmark : 8212022616
- Sweden : 6013327

Including : Base with PUR gasket. screws for mounting plate/DIN-rail and cover with polyamide cover screws.

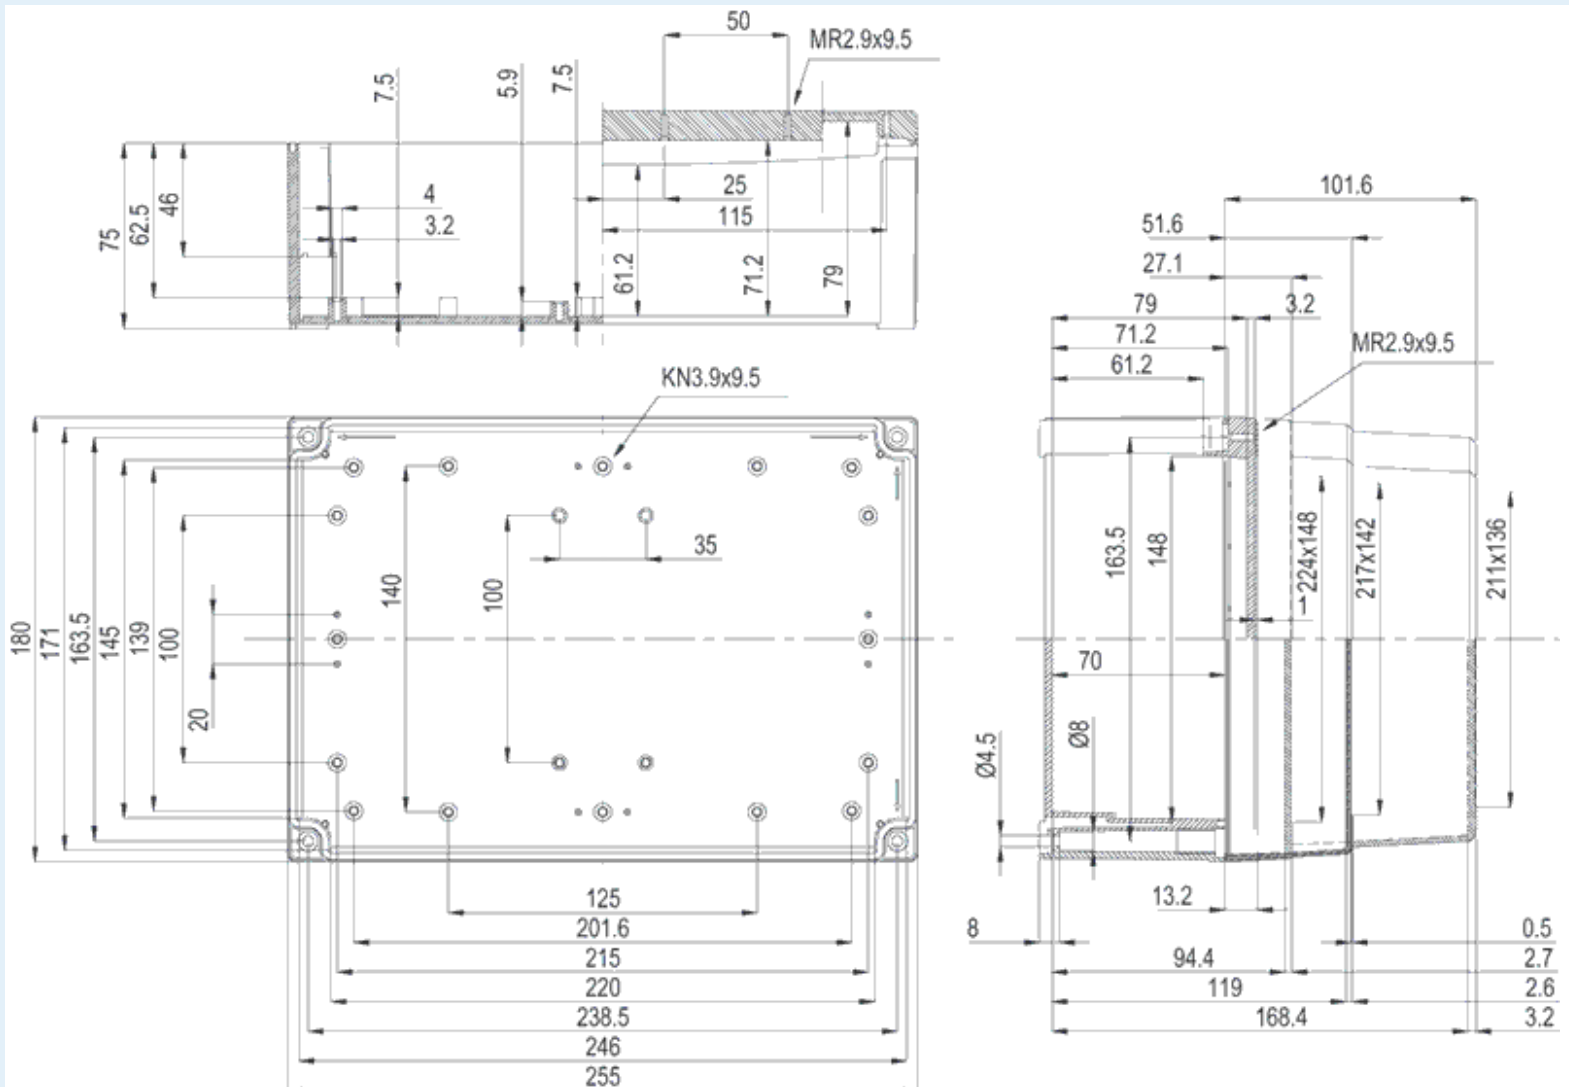

| Dimensions : | Height | Width | Depth |
|---------------------|---------------|--------------|--------------|
| mm : | 255 | 180 | 125 |

Materials :

| | |
|-------------------|----------------------|
| Material : | Polycarbonate |
| Base colour : | RAL_7035 |
| Cover colour : | RAL 7035 -light grey |
| Gasket material : | Polyurethane |

Temperatures :

| | |
|-------------------------------|-------------|
| Temperature °C (short term) : | -40 ... 120 |
| Temperature °C (continuous) : | -40 ... 80 |
| Temperature °F (short term) : | -40 ... 250 |
| Temperature °F (continuous) : | -40 ... 175 |

Accessories :

| | |
|------------------|---|
| MIN 20 | DIN-15 Mounting rail, for enclosures: (225 x 15 x 1) |
| HFP 180 | Front plate hinge series |
| MIN 15 | DIN-15 Mounting rail, for enclosures: (150 x 15 x 1) |
| MIV 200 | Mounting plate (Galvanized steel), for enclosures: (223 x 148 x 1) |
| FP A 200/ 180 | Front plate (Aluminium), for enclosures: (237 x 170 x 1) |
| MIV 15 | DIN-35 Mounting rail, for enclosures: (150 x 35 x 7) |
| FP 22046 | Wall fastening lug (4 pcs) |
| MIV 20 | DIN-35 Mounting rail, for enclosures: (225 x 35 x 7) |

Ratings :

| | |
|---|-------------------|
| Ingress protection (EN 60529): | IP66; IP67; |
| Impact Resistance (EN 62262): | IK08; |
| electrical_insulation : | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes |
| UV resistance : | UL 746C |
| Flammability Rating : | UL 94 V0 |
| Glow Wire Test (IEC 695-2-1) °C : | 960C |

Certificates :

Certificate FI 40847