

PC 3828 18 T-2FSH



200 x 200

Sample image

Order symbol : PC 3828 18 T-2FSH

Product nr : 2539553

Description : Enclosure, PC



Remarks : Transparent hinged cover

EAN : 6418074052926

El. number :

- Finland : 3435766
- Denmark : 8212051852
- Sweden : 2539553

Including : Base with screws for mounting plate. cover with PUR gasket and polyamide cover screws.

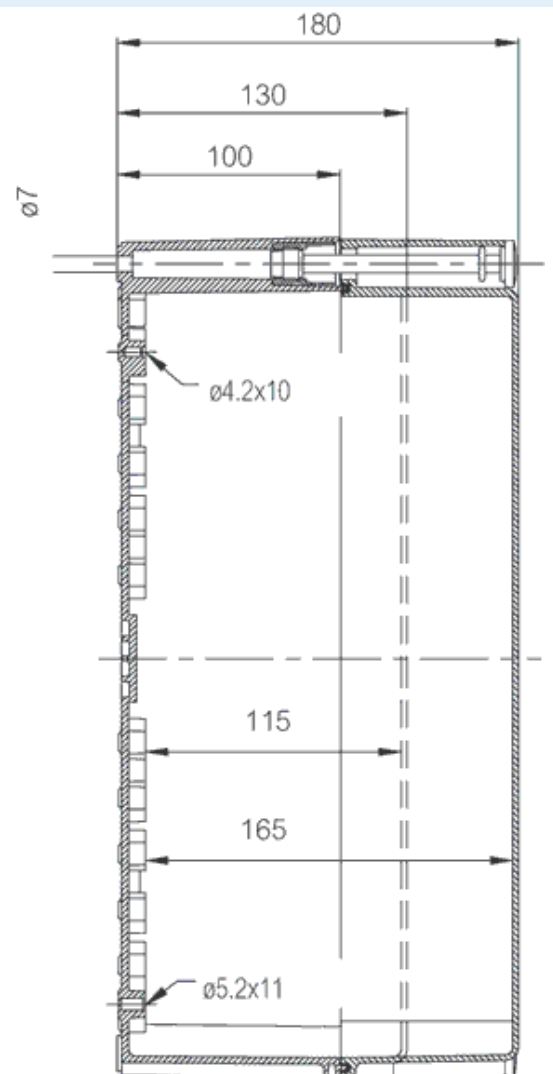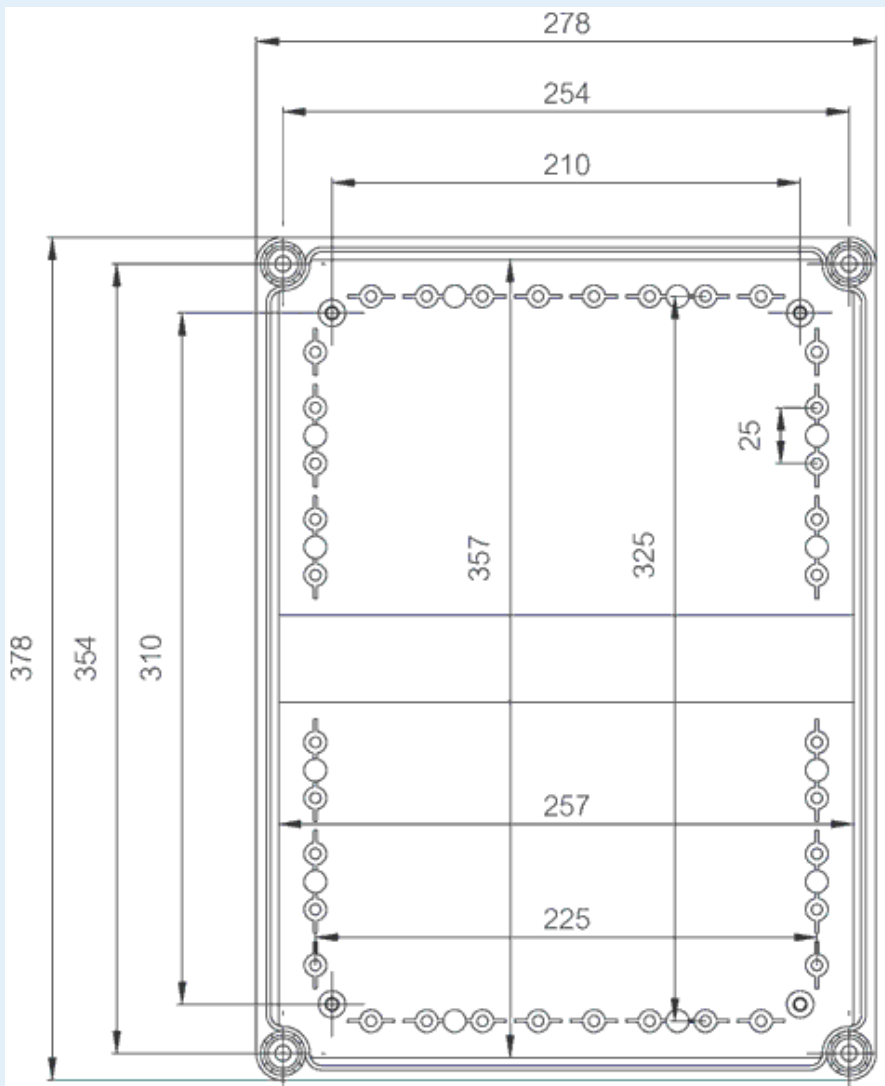

| Dimensions : | Height | Width | Depth |
|---------------------|---------------|--------------|--------------|
| mm : | 380 | 280 | 180 |
| inch : | 14.96 | 11.02 | 7.09 |

Materials :

| | |
|-------------------|-------------------|
| Material : | Polycarbonate |
| Base colour : | RAL_7035 |
| Cover colour : | Clear transparent |
| Gasket material : | Polyurethane |

Temperatures :

| | |
|-------------------------------|-------------|
| Temperature °C (short term) : | -40 ... 120 |
| Temperature °C (continuous) : | -40 ... 80 |
| Temperature °F (short term) : | -40 ... 250 |
| Temperature °F (continuous) : | -40 ... 175 |

Accessories :

| | |
|--------------|---|
| EKV 32 | DIN-35 Mounting rail, for enclosures: (335 x 35 x 7) |
| EKV 22 | DIN-35 Mounting rail, for enclosures: (235 x 35 x 7) |
| EKPZR | Extension frame, for enclosures: (380 x 280 x 50) |
| EKPVT | Mounting plate, for enclosures: (338 x 238 x 1) |
| MPI EKP 3828 | Multiperforated plastic mounting plate (338 x 238 x 4) |

Ratings :

| | |
|---|-------------------|
| Ingress protection (EN 60529): | IP65; |
| Impact Resistance (EN 62262): | IK08; |
| electrical_insulation : | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes |
| UV resistance : | UL 746C |
| Flammability Rating : | UL 94 V0 |
| Glow Wire Test (IEC 695-2-1) °C : | 960C |

Certificates :

DSS_FI_41597_A1