

PC C 65 G



Sample image

Order symbol : PC C 65 G

Product nr : 8724305

UL Name : UL PC C 65 G

Description : Enclosure, PC


Remarks : Grey cover

EAN : 6418074002037

El. number :

- Finland : 3423405
- Denmark : 8212001514
- Sweden : 2536807

Including : Base with screws for mounting plate/DIN-rail. cover with PUR gasket and polyamide cover screws.

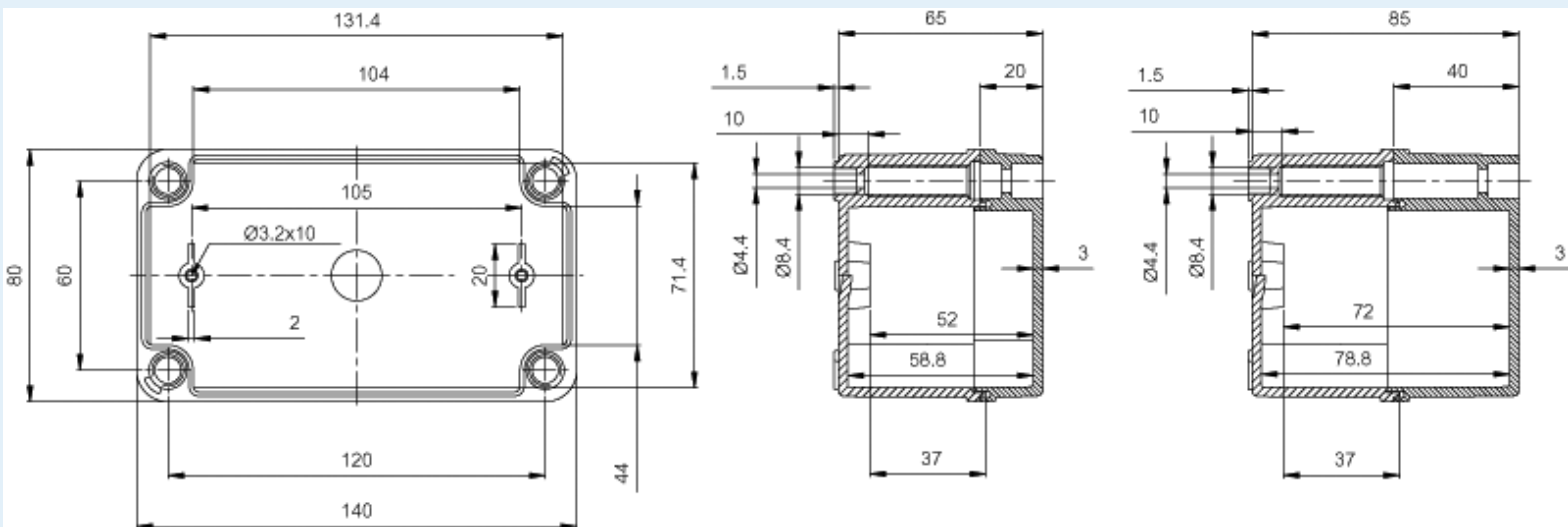

| Dimensions : | Height | Width | Depth |
|--------------|--------|-------|-------|
| mm : | 140 | 80 | 65 |
| inch : | 5.51 | 3.15 | 2.56 |

Materials :

| | |
|-------------------|----------------------|
| Material : | Polycarbonate |
| Base colour : | RAL 7035 -light grey |
| Cover colour : | RAL 7035 -light grey |
| Gasket material : | Polyurethane |

Accessories :

| | |
|----------|---|
| C-MP | Mounting plate, for enclosures: (110 x 54 x 1) |
| FP 22040 | Wall fastening lug (2 pcs), for enclosures: |
| CHM-3 | DIN-35 Mounting rail, for enclosures: (110 x 35 x 7) |

Ratings :

| | |
|---|-------------------|
| Ingress protection (EN 60529): | IP66; IP67; |
| Impact Resistance (EN 62262): | IK08; |
| electrical_insulation : | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes |

Temperatures :

Temperature °C (short term) : -40 ... 120

Temperature °F (short term) : -40 ... 250

Temperature °F (continuous) : -40 ... 175

UV resistance :

UL 746C

Flammability Rating :

UL 94 V0

Glow Wire Test (IEC 695-2-1) °C :

960C

Certificates :

SGSFIMKO_PICC_pc