

PC 162412



Sample image

Order symbol : PC 162412

Product nr : 7032830

Description : Enclosure, PC


Remarks : Grey cover

EAN : 6418074058478

El. number :

- Finland : 3435374
- Denmark : 8212002940
- Sweden : 2536130

Including : Base with screws for mounting plate/DIN-rail. cover with PUR gasket and stainless steel cover screws.

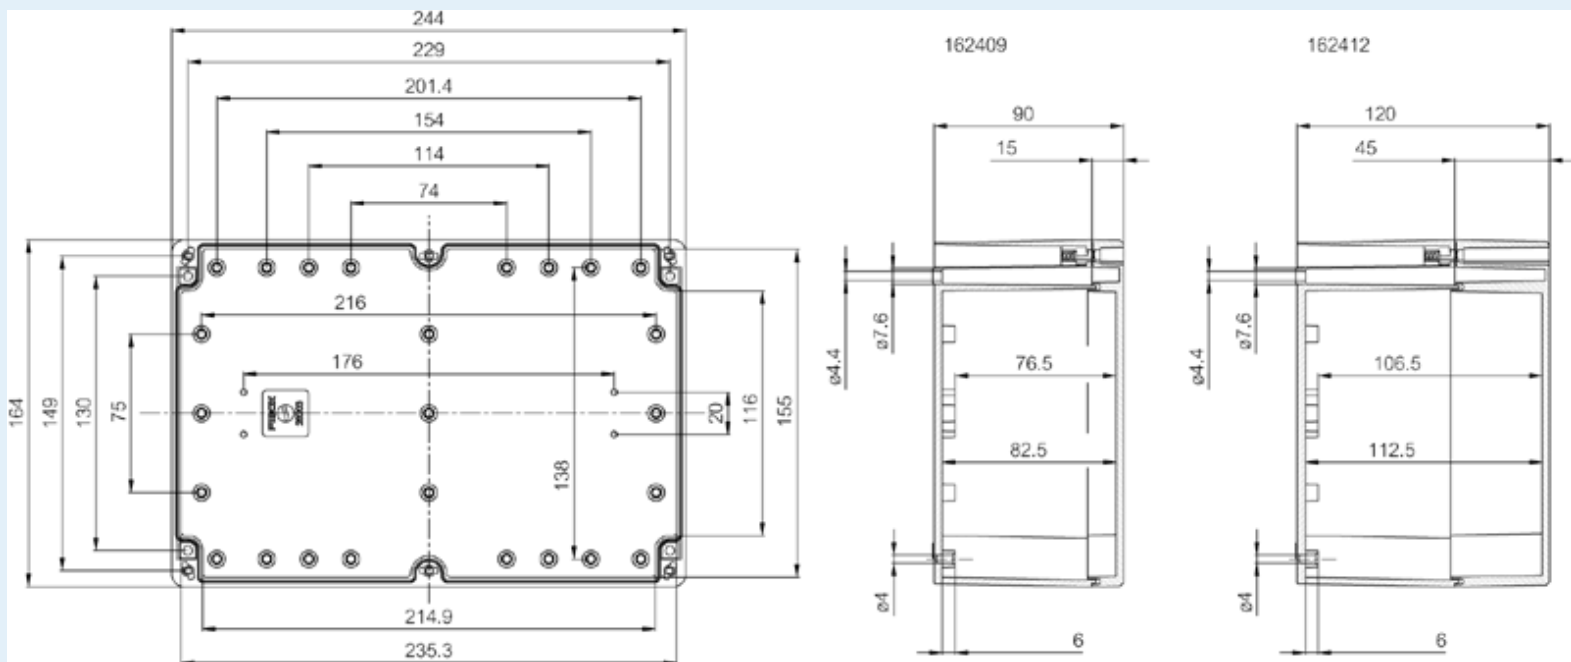

| Dimensions : | Height | Width | Depth |
|--------------|--------|-------|-------|
| mm : | 164 | 244 | 120 |
| inch : | 6.46 | 9.61 | 4.72 |

Materials :

| | |
|----------------|----------------------|
| Material : | Polycarbonate |
| Base colour : | RAL_7035 |
| Cover colour : | RAL 7035 -light grey |

Accessories :

| | |
|----------|---|
| TRH 24 | DIN-35 Mounting rail, for enclosures: (226 x 35 x 7) |
| TF 28037 | Wall fastening lug (4 pcs), for enclosures: |
| MIN 20 | DIN-15 Mounting rail, for enclosures: (225 x 15 x 1) |
| TM 1624 | Mounting plate, for enclosures: (212 x 151 x 1) |
| TH A | Grey plastic hinges (2 pcs) |

Gasket material : Polyurethane

Temperatures :

Temperature °C (continuous) : -40 ... 80

Temperature °F (continuous) : -40 ... 175

Ratings :

| | |
|---|-------------------|
| Ingress protection (EN 60529): | IP66; IP67; |
| Impact Resistance (EN 62262): | IK07; IK08; |
| electrical_insulation : | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes |
| UV resistance : | UL 746C |
| Flammability Rating : | UL 94 V0 |
| Glow Wire Test (IEC 695-2-1) °C : | 960C |

Certificates :

SGSFimko_EURONORD