

# PC MH 125 T



Sample image

**Order symbol :** PC MH 125 T

**Product nr :** 8724019

**Description :** Enclosure, PC


**Remarks :** Transparent cover

**EAN :** 6418074054579

**El. number :**

- Finland : 3423520
- Denmark : 8212001750
- Sweden : 2536861

**Including :** Base with screws for mounting plate/DIN-rail. cover with PUR gasket and polyamide cover screws.

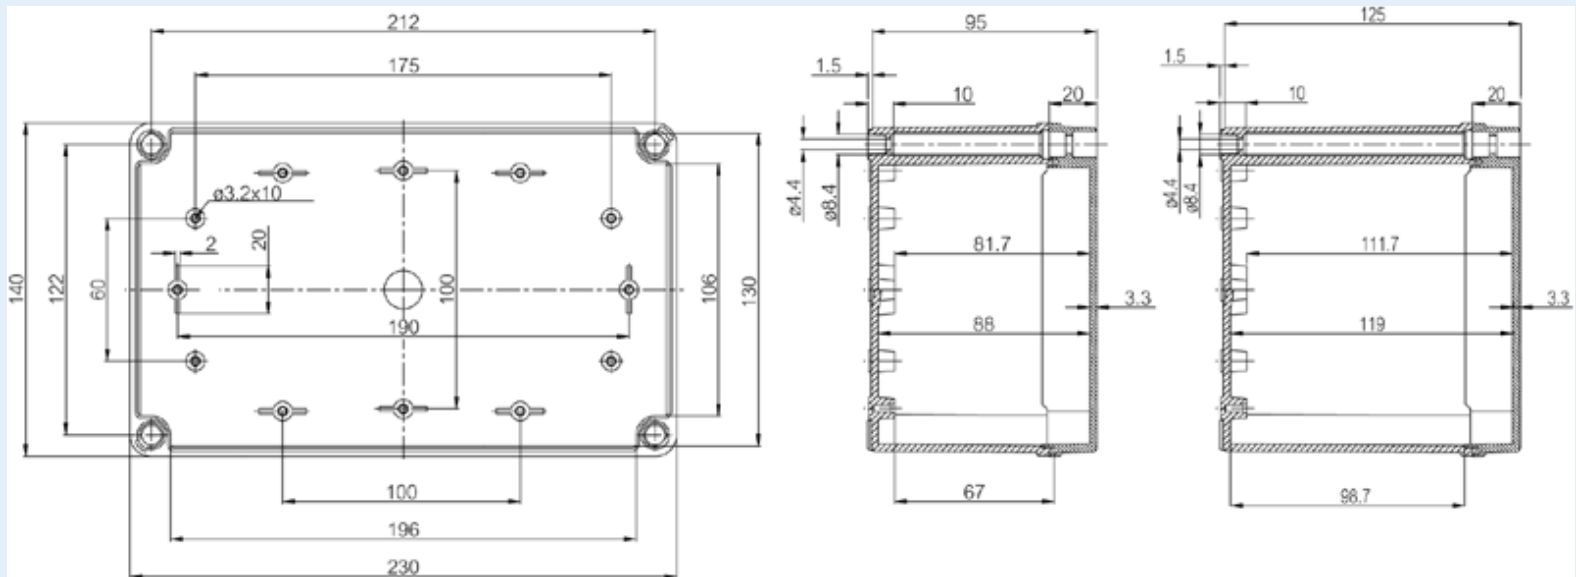

| Dimensions : | Height | Width | Depth |
|--------------|--------|-------|-------|
| mm :         | 230    | 140   | 125   |
| inch :       | 9.06   | 5.51  | 4.92  |

## Materials :

|                   |                   |
|-------------------|-------------------|
| Material :        | Polycarbonate     |
| Base colour :     | RAL_7035          |
| Cover colour :    | Clear transparent |
| Gasket material : | Polyurethane      |

## Accessories :

|          |                                                         |
|----------|---------------------------------------------------------|
| CHM-3    | DIN-35 Mounting rail, for enclosures:<br>(110 x 35 x 7) |
| FM-3     | DIN-35 Mounting rail, for enclosures:<br>(35 x 200 x 1) |
| FP 22046 | Wall fastening lug (4 pcs)                              |
| M-MP     | Mounting plate, for enclosures:<br>(185 x 94 x 1)       |

## Ratings :

|                                |             |
|--------------------------------|-------------|
| Ingress protection (EN 60529): | IP66; IP67; |
|--------------------------------|-------------|

**Temperatures :**

|                               |             |
|-------------------------------|-------------|
| Temperature °C (continuous) : | -40 ... 80  |
| Temperature °F (continuous) : | -40 ... 175 |

|                                         |                   |
|-----------------------------------------|-------------------|
| Impact Resistance (EN 62262):           | IK08;             |
| electrical_insulation :                 | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes               |
| UV resistance :                         | UL 746C           |
| Flammability Rating :                   | UL 94 V0          |
| Glow Wire Test (IEC 695-2-1) °C :       | 960C              |

**Certificates :**

SGSFIMKO\_PICC\_pc