

PC MH 125 G



Sample image

Order symbol : PC MH 125 G

Product nr : 8724319

Description : Enclosure, PC


Remarks : Grey cover

EAN : 6418074054586

El. number :

- Finland : 3423420
- Denmark : 8212001747
- Sweden : 2536831

Including : Base with screws for mounting plate/DIN-rail. cover with PUR gasket and polyamide cover screws.

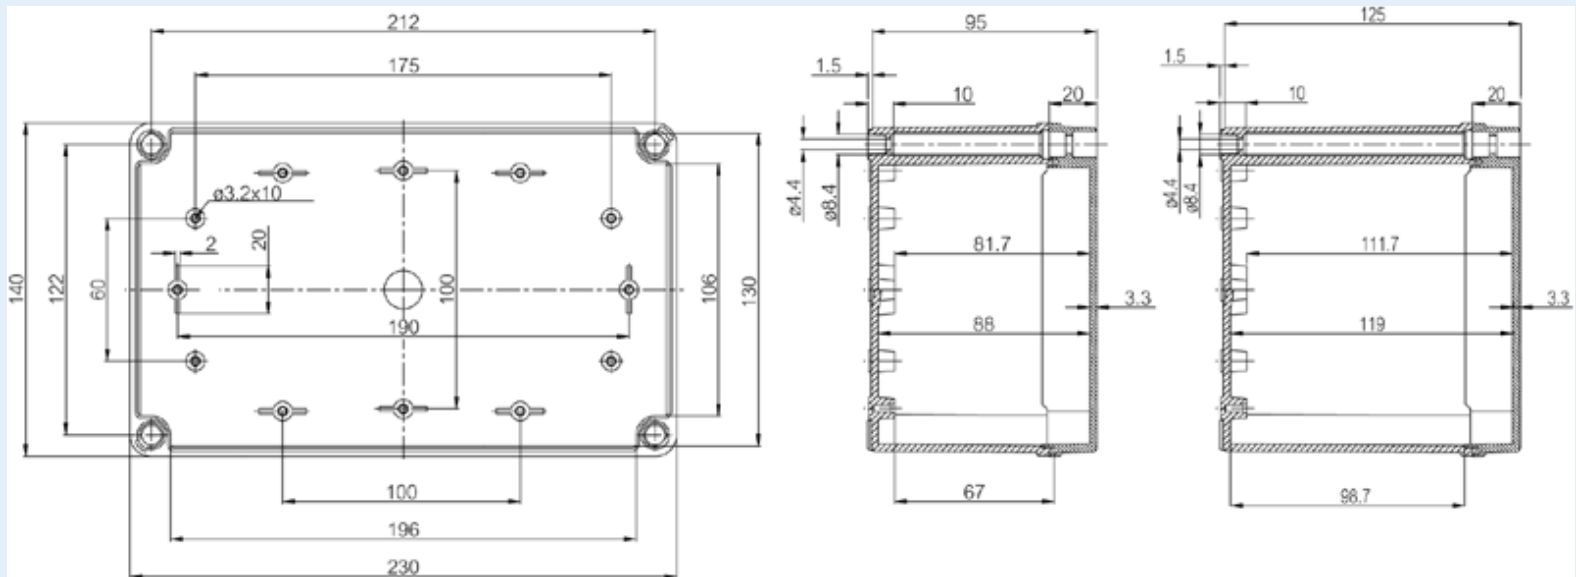

| Dimensions : | Height | Width | Depth |
|--------------|--------|-------|-------|
| mm : | 230 | 140 | 125 |
| inch : | 9.06 | 5.51 | 4.92 |

Materials :

| | |
|-------------------|----------------------|
| Material : | Polycarbonate |
| Base colour : | RAL_7035 |
| Cover colour : | RAL 7035 -light grey |
| Gasket material : | Polyurethane |

Accessories :

| | |
|----------|---------------------------------------------------------|
| CHM-3 | DIN-35 Mounting rail, for enclosures: (110 x 35 x 7) |
| FM-3 | DIN-35 Mounting rail, for enclosures: (35 x 200 x 1) |
| FP 22046 | Wall fastening lug (4 pcs) |
| M-MP | Mounting plate, for enclosures: (185 x 94 x 1) |

Ratings :

| | |
|--------------------------------|-------------|
| Ingress protection (EN 60529): | IP66; IP67; |
|--------------------------------|-------------|

Temperatures :

| | |
|-------------------------------|-------------|
| Temperature °C (continuous) : | -40 ... 80 |
| Temperature °F (continuous) : | -40 ... 175 |

| | |
|-----------------------------------------|-------------------|
| Impact Resistance (EN 62262): | IK08; |
| electrical_insulation : | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes |
| UV resistance : | UL 746C |
| Flammability Rating : | UL 94 V0 |
| Glow Wire Test (IEC 695-2-1) °C : | 960C |

Certificates :

SGSFIMKO_PICC_pc