

Part number

# CDSHM 42



Male insert, CDSH series, SQUICH® spring terminal connection without tools, 42 poles + PE, 10 A 400 V 6 kV 3, size "104.27"

| Product description                    |                                                                                              | Material properties          |                                                                                |
|----------------------------------------|----------------------------------------------------------------------------------------------|------------------------------|--------------------------------------------------------------------------------|
| Product type                           | Insert                                                                                       | Main material                | Polycarbonate (PC)                                                             |
| Series                                 | CDSH                                                                                         | Other materials              | Contacts: copper alloy                                                         |
| Connection type                        | SQUICH® spring terminal connection without tools                                             | Colour                       | RAL 7032 grey                                                                  |
| Gender                                 | Male                                                                                         | RoHs conformity              | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| N. of poles                            | 42 poles +  | China RoHs - EFUP            | 50                                                                             |
| Size                                   | Size 104.27                                                                                  | REACH SVHC substances        | Yes<br>Lead                                                                    |
| Technical data                         |                                                                                              | SCIP number                  | 1a9c93ff-0445-4a16-81e3-1609ac5274d6                                           |
| Current                                | 10 A                                                                                         | Approvals / Standards        |                                                                                |
| Voltage                                | 400 V                                                                                        | Reference standard           | EN 61984:2009-06                                                               |
| Rated impulse withstand voltage        | 6 kV                                                                                         | Certifications               | DNV, BV, EAC, CQC                                                              |
| Pollution degree                       | 3                                                                                            | UL                           | ECBT2                                                                          |
| Rated voltage according to UL/CSA      | 600 V                                                                                        | cUL                          | ECBT8                                                                          |
| Wire cross-section                     | 0,14 mm² - 2,50 mm²                                                                          | General ordering information |                                                                                |
| AWG size                               | 26 - 14                                                                                      | EAN13 code                   | 8015747222631                                                                  |
| Contact type                           | Turned silver plated                                                                         | eCl@ss 8.1                   | 27440205                                                                       |
| IP degree of protection                | IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure                                   | ETIM 7.0                     | EC000438                                                                       |
| Further technical details              |                                                                                              | Packaging Information        |                                                                                |
| Mating cycles                          | ≥ 500                                                                                        | Packaging length             | 245,00 mm                                                                      |
| Insulation resistance                  | ≥ 10 GΩ                                                                                      | Packaging height             | 165,00 mm                                                                      |
| Contact resistance                     | ≤ 3 mΩ                                                                                       | Packaging width              | 215,00 mm                                                                      |
| Weight                                 | 126,70 g                                                                                     | Packaging weight             | 4,10 kg                                                                        |
| Operating temperature range (min, max) | -40 °C ... +125 °C                                                                           | Packaging volume             | 8,69 dm³                                                                       |
| UL 94 flammability rating              | V-0                                                                                          | Packaging description        | Carton box                                                                     |
|                                        |                                                                                              | Packaging quantity           | 30 Pcs                                                                         |
|                                        |                                                                                              | Packaging EAN code           | 8015747222815                                                                  |
|                                        |                                                                                              | Sub-packaging length         | 197,00 mm                                                                      |
|                                        |                                                                                              | Sub-packaging height         | 55,00 mm                                                                       |
|                                        |                                                                                              | Sub-packaging width          | 113,00 mm                                                                      |
|                                        |                                                                                              | Sub-packaging weight         | 0,68 kg                                                                        |
|                                        |                                                                                              | Sub-packaging volume         | 1,22 dm³                                                                       |
|                                        |                                                                                              | Sub-packaging description    | Carton tray                                                                    |
|                                        |                                                                                              | Sub-packaging quantity       | 5 Pcs                                                                          |
|                                        |                                                                                              | Sub-packaging EAN barcode    | 8015747222822                                                                  |

Part number

# CDSHM 42



## Notes

Dimensions shown in mm are not binding and may be changed without notice.

### California Proposition 65 Information



#### WARNING



This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

### California Proposition 65 Information



#### WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

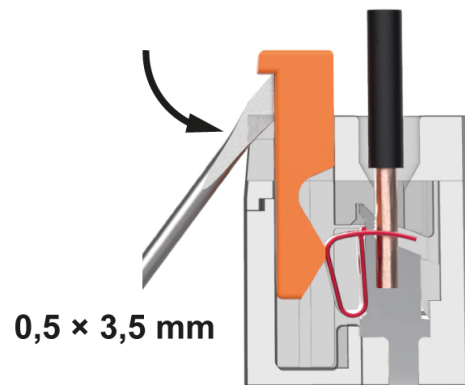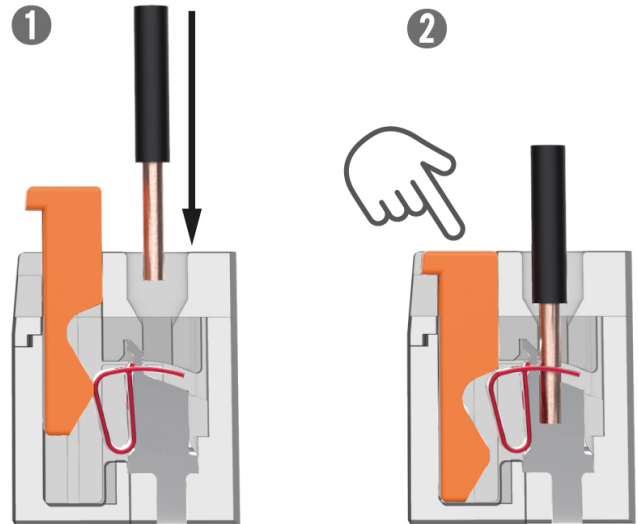

Reopening

SQUICH® connection with actuator button