

Interface plug-in relay, 10 A, 1 CO, clear cover, 230 V AC

Local distributor code:

403006083 RXG15P7

EAN Code: 3606480688928

Main

Range of product	Harmony Electromechanical Relays	
Series name	RXG series	
Product or component type	Plug-in relay	
Relay type	Interface relay	
Contacts type and composition	1 C/O	
[Uc] control circuit voltage	24 V AC	
[Ithe] conventional enclosed thermal current	10 A at -4055 °C	

Complementary

Complementary		
status LED	Without	
[Ui] rated insulation voltage	250 V conforming to IEC 300 V conforming to CSA 300 V conforming to UL	
Maximum switching voltage	250 V AC 30 V DC	
Drop-out voltage threshold	>= 0.3 Uc AC	
Load current	10 A at 250 V AC	
Minimum switching capacity	500 mW at 100 mA, 5 V DC	
Maximum switching capacity	2500 VA	
control type	Without lockable test button	
Contact resistance	100 mOhm	
Insulation resistance	1000 MOhm at 500 V DC	
Electrical insulation class	Class F	
Mechanical durability	10000000 cycles	
Safety reliability data	B10d = 100000	
Operating rate	<= 1800 cycles/hour under load <= 18000 cycles/hour no-load	
Utilisation coefficient	20 %	
Operating time	20 ms	
Reset time	20 ms	
Dielectric strength	1000 V AC between contacts with micro disconnection 5000 V AC between coil and contact with reinforced insulation	
Overvoltage category	III	

Protection category	RTI
pollution degree	2
Test levels	Level A group mounting
Device presentation	Complete product
Contacts material	Silver alloy (AgSnO2In2O3)
Shape of pin	Flat (faston type)
Net weight	0.019 kg

Environment

Standards	IEC 61810-1 CSA C22.2 No 14 UL 508
Product certifications	UL CSA EAC CE DNV-GL
Ambient air temperature for storage	-4085 °C
ambient air temperature for operation	-4070 °C
IP degree of protection	IP40
Relative humidity	1085 %
Vibration resistance	3 gn, amplitude = +/- 0.75 mm (f = 10150 Hz)in operation 5 gn, amplitude = +/- 0.75 mm (f = 10150 Hz)not in operation

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.500 cm
Package 1 Width	1.400 cm
Package 1 Length	3.100 cm
Package 1 Weight	18.000 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	3.500 cm
Package 2 Width	7.500 cm
Package 2 Length	8.200 cm
Package 2 Weight	204.000 g
Unit Type of Package 3	S01
Number of Units in Package 3	240
Package 3 Height	15.000 cm
Package 3 Width	15.000 cm
Package 3 Length	40.000 cm
Package 3 Weight	5.130 kg

Logistical informations

Country of origin CN

Contractual warranty

Warranty 18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

⊘ Environmental footprint	
Carbon footprint (kg.eq.CO2 per CR, Total Life cycle)	10
Environmental Disclosure	Product Environmental Profile

Use Better

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACh Regulation	REACh Declaration


Use Again


○ Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No


RXG15P7

Dimensions Drawings

Dimensions








RXG15P7

Connections and Schema


Wiring Diagram



Performance Curves

Performance Curves

Maximum Switching Capacity



X: Switching voltage (V)

Y: Switching current (A)

(1) AC Resistive Load


(2) AC Inductive Load cos(Ø)=0.4

(3) DC Resistive Load

(4) DC Inductive Load (L/R=7ms)

Life Expectancy

Resistive Load



X : Contact Current (A)


Y: Operating Cycle Number

Life Expectancy

Inductive Load

Product datasheet


RXG15P7



- X : Contact Current (A)
 Y : Operating Cycle Number
- **NOTE:** These are typical curves, actual durability depends on load, environment, duty cycle, etc.

Coil Operating Range


AC Coil Operating Range VS Ambient Temperature

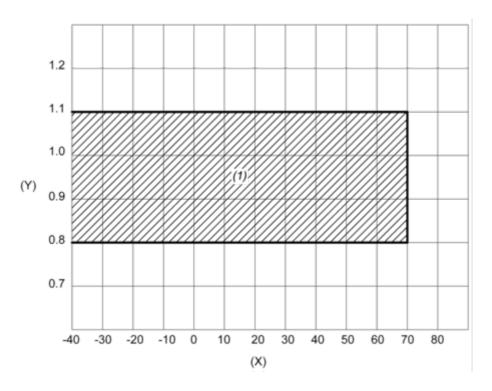



- X : Ambient temperature (°C)
- Y: Coil voltage (U/Uc)
- (1) Permitted operating range area

Technical Illustration

Dimensions







Product datasheet

RXG15P7

Image of product / Alternate images

Alternative



