
## Data Sheet | Item Number: 2004-1392

### End and intermediate plate; 1 mm thick; orange

https://www.wago.com/2004-1392



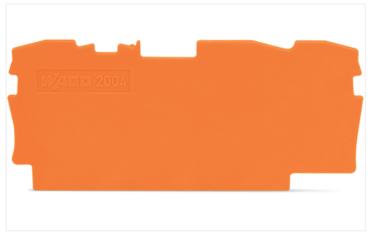

Color: ■ orange

Physical data	
Width	1 mm / 0.039 inches
Height	65 mm / 2.56 inches
Depth	29.7 mm / 1.169 inches

Mechanical data	
Mounting type	snap-on type

Material data	
Note (material data)	
	<u>Information on material specifications can be found here</u>
Color	orange
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.062 MJ
Weight	2.1 g

Environmental requirements			
Processing temperature	-35 +85 °C	<b>Environmental Testing (Environmental Testing</b>	ental Conditions)
Continuous operating temperature -60 +105 °C	Test specification Railway applications – Rolling stock – Electronic equipment	DIN EN 50155 (VDE 0115-200):2022-06	
	Test procedure Railway applications – Rolling stock equipment – Shock and vibration tests	DIN EN 61373 (VDE 0115-0106):2011-04	
		Spectrum/Installation location	Service life test, Category 1, Class A/B
	Function test with noise-like vibration	Test passed according to Section 8 of the standard	
	Frequency	$f_1 = 5 \text{ Hz to } f_2 = 150 \text{ Hz}$ $f_1 = 5 \text{ Hz to } f_2 = 150 \text{ Hz}$	
		Acceleration	0.101g (highest test level used for all axes) 0.572g (highest test level used for all axes) 5g (highest test level used for all axes)

# Data Sheet | Item Number: 2004-1392 https://www.wago.com/2004-1392



<b>Environmental Testing (Environmen</b>	ntal Conditions)
Test duration per axis	10 min. 5 h
Test directions	X, Y and Z axes X, Y and Z axes X, Y and Z axes
Monitoring for contact faults/interruptions	Passed
Voltage drop measurement before and after each axis	Passed
Simulated service life test through increased levels of noise-like vibration	Test passed according to Section 9 of the standard
Extended test scope: Monitoring for contact faults/interruptions	Passed Passed
Extended test scope: Voltage drop measurement before and after each axis	Passed Passed
Shock test	Test passed according to Section 10 of the standard
Shockform	Half sine
Shock duration	30 ms
Number of shocks per axis	3 pos. und 3 neg.
Vibration and shock stress for rolling stock equipment	Passed

Commercial data	
Product Group	22 (TOPJOB S)
PU (SPU)	100 (25) pcs
Packaging type	Box
Country of origin	CN
GTIN	4044918451826
Customs tariff number	85389099990

Product classification	
UNSPSC	39121702
eCl@ss 10.0	27-14-11-33
eCl@ss 9.0	27-14-11-33
ETIM 9.0	EC000886
ETIM 8.0	EC000886
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

#### Approvals / Certificates

#### Declarations of conformity and manufacturer's declarations




Approval	Standard	Certificate Name
Railway WAGO GmbH & Co. KG	-	Railway Ready


#### Data Sheet | Item Number: 2004-1392

https://www.wago.com/2004-1392



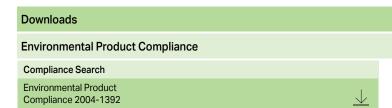

Documentation			
Bid Text			
2004-1392	28.04.2017	doc 23.50 KB	$\underline{\downarrow}$
2004-1392	19.02.2019	xml 2.51 KB	$\underline{\downarrow}$

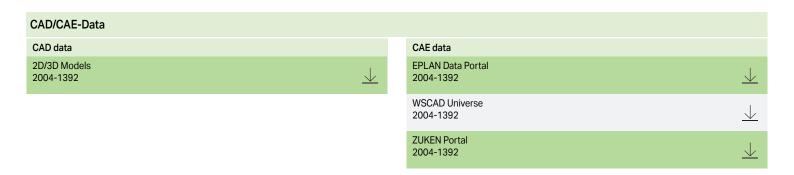

Subject to changes. Please also observe the further product documentation!

Page 3/3 Version 08.05.2025