


Data Sheet | Item Number: 210-112

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715;
"Hole width 25 mm; silver-colored

<https://www.wago.com/210-112>



Color: ■ silver-colored

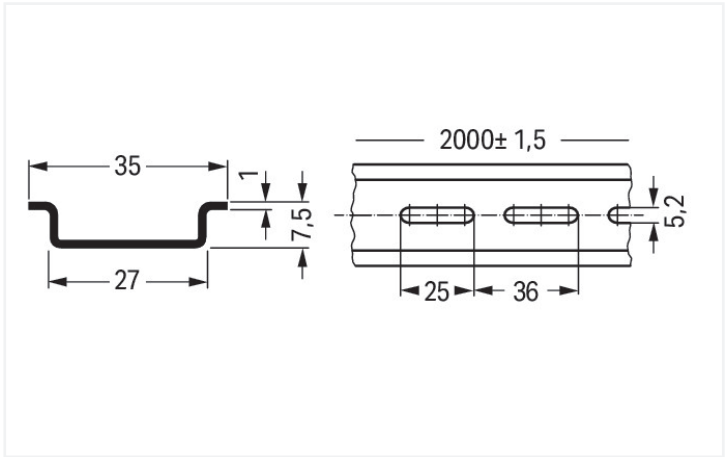

Dimensions in mm

Physical data	
Width	2000 mm / 78.74 inches
Height	7.5 mm / 0.295 inches
Depth	35 mm / 1.378 inches

Material data	
Color	silver-colored
Fire load	0 MJ
Weight	320 g

Commercial data	
Product Group	2 (Terminal Block Accessories)
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	IT
GTIN	4017332272292
Customs tariff number	72169180000

Product classification	
UNSPSC	30101804
eCl@ss 10.0	27-40-06-02
eCl@ss 9.0	27-40-06-02
ETIM 9.0	EC001285
ETIM 8.0	EC001285
ECCN	NO US CLASSIFICATION



Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 210-112	

Documentation

Bid Text			
210-112	19.02.2019	xml 2.73 KB	
210-112	23.11.2018	docx 14.52 KB	

CAD/CAE-Data

CAD data	
2D/3D Models 210-112	

CAE data	
EPLAN Data Portal 210-112	
WSCAD Universe 210-112	
ZUKEN Portal 210-112	

1 Compatible Products

1.1 Optional Accessories

1.1.1 Installation

1.1.1.1 Mounting accessories

 Item No.: 210-148 Angled support bracket; without screw; silver-colored	 Item No.: 209-109 Edge guards; for DIN 35 rail (7.5 mm high); gray	 Item No.: 209-137 Mounting adapter; can be used as end stop; 6.5 mm wide; gray	 Item No.: 210-149 Screw M 5 x 8; for angled support bracket
 Item No.: 249-117 Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray	 Item No.: 249-197 Screwless end stop; 14 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray	 Item No.: 249-116 Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray	



1.1.2 Marking

1.1.2.1 Label



Item No.: 210-808
Labels; for Smart Printer; 9.5 x 25 mm;
white



Item No.: 210-708
Labels; for TP printers; 9.5 x 25 mm; white

Installation Notes

DIN-Rail	Item No.	Current [A]	Acc. to mm²/AWG/Gi
DIN 35 x 7.5 (steel)			
slotted	210-112	76	16/6
unslotted	210-113	76	16/6
DIN 35 x 15 (steel)			
1.5 mm thick	210-114	125	35/2
2.3 mm thick	210-118	125	35/2
DIN 35 x 7.5 (Al)			
unslotted	210-196	76	16/6
DIN 35 x 15 (Cu)			
2.3 mm thick	210-198	309	150/6/0
Current applies to rails of 1 m/3'3" length			

When using standard DIN-rails as ground conductor busbars, please refer to the maximum current capacities listed above. Steel DIN-rails are not suited for PEN (ground and N-conductor) applications per EN 60947-7-2 (VDE 0611, Part 3).