


Data Sheet | Item Number: 216-208

Ferrule; Sleeve for 6 mm² / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; yellow

<https://www.wago.com/216-208>



Color: ■ yellow

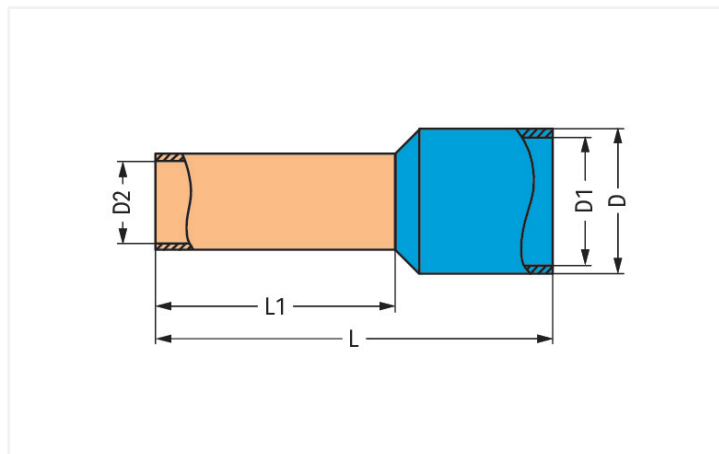

Dimensions in mm

Connection data

Cross-section metric	6 mm ²
Strip length	14 ... 15 mm / 0.55 ... 0.59 inches
Cross-section AWG	10 AWG

Physical data

Wall thickness plastic collar	0.3 mm
Total length	20 mm
Wall thickness crimp sleeve	0.2 mm
Crimp length (length of sleeve)	12 mm
Inner Diameter plastic collar	6.3 mm
Diameter crimp sleeve inside	3.5 mm

Mechanical data

Plastic collar	Standard collar
Suitable	2006 Series

Material data

Color	yellow
Fire load	0.004 MJ
Weight	0.4 g

Commercial data

Product Group	2 (Terminal Block Accessories)
PU (SPU)	1000 (100) pcs
Packaging type	Box
Country of origin	DE
GTIN	4017332277532
Customs tariff number	85369010000



Product classification		
UNSPSC		39121405
eCl@ss 10.0		27-40-02-01
eCl@ss 9.0		27-40-02-01
ETIM 9.0		EC000005
ETIM 8.0		EC000005
ECCN		NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 216-208

↓

Documentation				
Bid Text				
216-208	19.02.2019	xml	2.80 KB	↓
216-208	11.09.2017	doc	24.50 KB	↓


CAD/CAE-Data

CAD data

2D/3D Models 216-208

↓

Installation Notes



A perfect gas-tight crimp – both electrical-ly and mechanically reliable