



Data Sheet | Item Number: 282-870

3-conductor disconnect/test terminal block; e.g., current transformer circuits; with touch-proof test sockets; for 4 mm Ø test plugs; for DIN-rail 35 x 15 and 35 x 7.5; 6 mm²; CAGE CLAMP®; 6,00 mm²; gray

<https://www.wago.com/282-870>

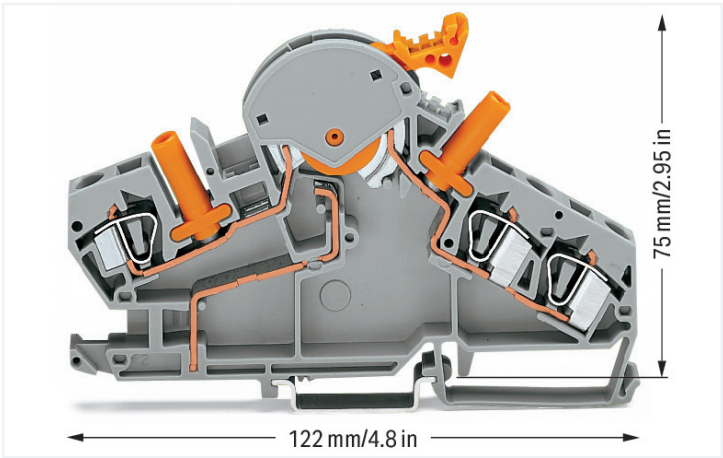

Color: ■ gray

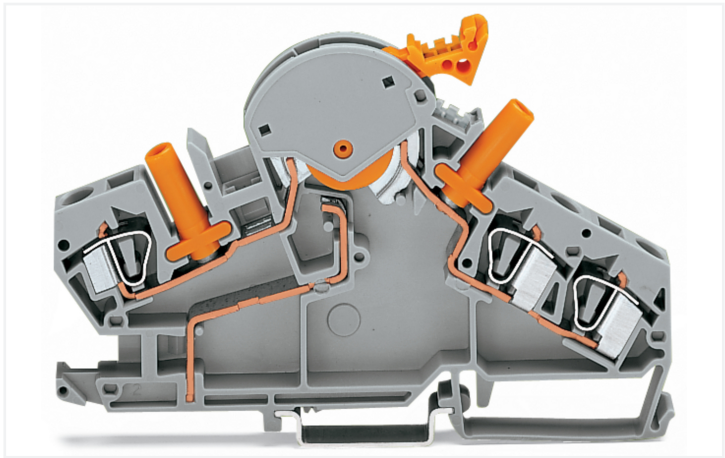

Current transformer terminal block, 282 Series, CAGE CLAMP®

Fault-free electrical installations are guaranteed with this current transformer terminal block (item number 282-870). Conductors should only be connected to this current transformer terminal block if their strip length is between 12 mm and 13 mm. Featuring conductor terminals along with CAGE CLAMP®, this product outperforms the competition. Our reliable and maintenance-free CAGE CLAMP® connection makes it easy to connect all conductor types without having to prepare the conductor. For example, you don't need to crimp ferrules. This current transformer terminal block is suitable for conductor cross sections ranging from 0.2 mm² to 6 mm². It has one level. Two potentials can connect using the three clamping points. The gray housing is made of polyamide (PA66) for insulation. These function terminal blocks are mounted using DIN-35 rails..

Electrical data			
Ratings per IEC/EN		Power Loss	
Nominal voltage (III/3)	500 V	Power loss, per pole (potential)	0.702 W
Rated impulse withstand voltage (III / 3)	6 kV	Rated current I _N for specified power loss	30 A
Rated current	30 A	Resistance value for specified, current-dependent power loss	0.00078 Ω
Legend (ratings)	(III / 3) ≙ Overvoltage category III / Pollution degree 3		

Connection data		Connection 1	
Clamping units	3	Connection technology	CAGE CLAMP®
Total number of potentials	2	Actuation type	Operating tool
Number of levels	1	Connectable conductor materials	Copper
		Solid conductor	0.2 ... 6 mm² / 24 ... 10 AWG
		Fine-stranded conductor	0.2 ... 6 mm² / 24 ... 10 AWG
		Strip length	12 ... 13 mm / 0.47 ... 0.51 inches
		Wiring direction	Front-entry wiring



Physical data	
Width	8 mm / 0.315 inches
Height	122 mm / 4.803 inches
Depth from upper-edge of DIN-rail	75 mm / 2.953 inches

Mechanical data	
Design	angled
Mounting type	DIN-35 rail
Marking level	Center marking

Material data	
Note (material data)	Information on material specifications can be found here
Color	gray
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.688 MJ
Weight	46.7 g

Environmental requirements	
Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C

Commercial data	
Product Group	1 (Rail Mounted Terminal Blocks)
PU (SPU)	20 pcs
Packaging type	Box
Country of origin	CN
GTIN	4044918692861
Customs tariff number	85365080000

Product classification	
UNSPSC	39121410
eCl@ss 10.0	27-14-11-26
eCl@ss 9.0	27-14-11-26
ETIM 9.0	EC000902
ETIM 8.0	EC000902
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	8b44b459-bc8a-4294-92d0-5870e5057aca
SCIP notification number (Belgium)	0ec07c85-16be-46aa-bacb-7aa795b3c27d
SCIP notification number (Bulgaria)	00727039-2b5f-41b4-acbf-6e3db4a3f55c
SCIP notification number (Czech Republic)	db80c370-42be-4189-8e20-6174ab37eabe
SCIP notification number (Denmark)	b54720c2-5897-4e86-b89d-583df5fd522e
SCIP notification number (Finland)	7533c0d4-2854-4c74-866f-041384878e88
SCIP notification number (France)	6a8a86e8-e8e3-4d99-a667-4c388f8f0615



Environmental Product Compliance

SCIP notification number (Germany)	c3daf65b-956e-49f3-a4c1-089f7f3965ec
SCIP notification number (Hungary)	13c0d4e3-52dc-46ea-950e-cab1a2645d03
SCIP notification number (Italy)	97c46503-1131-4e03-9d44-f21af3785992
SCIP notification number (Netherlands)	ed8acc29-fbbd-4d7b-9a32-afcb0a7225ec
SCIP notification number (Poland)	6f35dea7-095b-412e-9e05-7def11c33469
SCIP notification number (Romania)	12821fc1-b79c-476a-9ff9-67661d951494
SCIP notification number (Sweden)	ed6a607f-6da0-4d39-83de-73b6eae7552

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 60947	NTR NL 7894
cURus Underwriters Laboratories Inc.	UL 1059	E45172
KEMA/KEUR DEKRA Certification B.V.	EN 60947	71-120778

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Approvals for marine applications



Approval	Standard	Certificate Name
ABS American Bureau of Ship- ping	EN 60947	20-HG1941090-PDA
BV Bureau Veritas S.A.	EN 60947	07436/F0 BV
DNV GL Det Norske Veritas, Ger- manischer Lloyd	-	TAE00001V2

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 282-870





Documentation

Bid Text			
282-870	19.02.2019	xml 3.47 KB	
282-870	02.03.2017	doc 25.00 KB	

CAD/CAE-Data

CAD data	CAE data
2D/3D Models 282-870	EPLAN Data Portal 282-870
	WSCAD Universe 282-870
	ZUKEN Portal 282-870

1 Compatible Products

1.1 Required Accessories

1.1.1 End plate

1.1.1.1 End plate



[Item No.: 282-392](#)
End and separator plate; 1.5 mm thick; with lock-out seal option; gray



[Item No.: 282-387](#)
End and separator plate; 1.5 mm thick; with lock-out seal option; orange



[Item No.: 282-391](#)
End and separator plate; 1.5 mm thick; without lock-out seal option; gray



[Item No.: 282-386](#)
End and separator plate; 1.5 mm thick; without lock-out seal option; orange

1.2 Optional Accessories

1.2.1 Coding

1.2.1.1 Locking system



[Item No.: 282-384](#)
Lock-out; for disconnect link; yellow

1.2.2 DIN-rail

1.2.2.1 Mounting accessories



[Item No.: 210-196](#)
Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



[Item No.: 210-198](#)
Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored



[Item No.: 210-508](#)
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored



[Item No.: 210-197](#)
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored



[Item No.: 210-506](#)
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored



[Item No.: 210-114](#)
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



[Item No.: 210-118](#)
Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored



[Item No.: 210-115](#)
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored



1.2.2.1 Mounting accessories



Item No.: 210-112
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored



Item No.: 210-504
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored



Item No.: 210-113
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored



Item No.: 210-505
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored

1.2.3 Ferrule

1.2.3.1 Ferrule



Item No.: 216-262
Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



Item No.: 216-263
Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



Item No.: 216-264
Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



Item No.: 216-266
Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue



Item No.: 216-267
Ferrule; Sleeve for 4 mm² / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray

1.2.4 Installation

1.2.4.1 Cover



Item No.: 709-154
Cover; Type 2; suitable for cover carrier, type 2; 1 m long; transparent

1.2.4.2 Cover carrier



Item No.: 709-168
Cover carrier; Type 2; incl. fixing/retaining screws and knurled nut; suitable for 283 to 285 Series rail-mounted terminal blocks; suitable for 279 to 281 Series double- and triple-deck terminal blocks; suitable for 780 to 785, 775, 776 and 777 Series TOP-JOB® rail-mounted terminal blocks; suitable for 280 Series sensor and actuator terminal blocks; suitable for 282 Series disconnect/test terminal blocks for transformer circuits; gray

1.2.4.3 Mounting accessories


































Item No.: 209-106
Mounting carrier; for isolated mounting on DIN 35 rails; gray



Item No.: 249-116
Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



1.2.5 Jumper			
1.2.5.1 Jumper			
			
Item No.: 282-402 Jumper; insulated; gray	Item No.: 282-409 Jumper; insulated; gray	Item No.: 282-424 Jumper; insulated; orange	Item No.: 282-422 Jumper; insulated; yellow-green
			
Item No.: 709-110 Wire commoning chain; 2.5 mm²; insulated; black	Item No.: 709-111 Wire commoning chain; 2.5 mm²; insulated; black	Item No.: 709-112 Wire commoning chain; 2.5 mm²; insulated; black	
1.2.6 Locking system			
1.2.6.1 Locking system			
			
Item No.: 210-254 Interlocking link; mechanically locks multiple links; 1 m long; transparent	Item No.: 282-881 Locking cover; mechanically locks multiple links; 1-pole; transparent	Item No.: 282-882 Locking cover; mechanically locks multiple links; 2-pole; transparent	Item No.: 282-883 Locking cover; mechanically locks multiple links; 3-pole; transparent
			
Item No.: 282-884 Locking cover; mechanically locks multiple links; 4-pole; transparent	Item No.: 282-885 Locking cover; mechanically locks multiple links; 5-pole; transparent	Item No.: 282-886 Locking cover; mechanically locks multiple links; 6-pole; transparent	Item No.: 282-887 Locking cover; mechanically locks multiple links; 7-pole; transparent
			
Item No.: 282-888 Locking cover; mechanically locks multiple links; 8-pole; transparent			
1.2.7 Marking			
1.2.7.1 Group marker carrier			
			
Item No.: 209-143 Group marker carrier; gray	Item No.: 209-144 Group marker carrier; gray	Item No.: 249-105 Group marker carrier; gray	
1.2.7.2 Marker			
			
Item No.: 793-5501/000-006 WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; blue	Item No.: 793-5501/000-014 WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; brown	Item No.: 793-5501/000-007 WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; gray	Item No.: 793-5501/000-023 WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; green
			
Item No.: 793-5501/000-017 WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; light green	Item No.: 793-5501/000-012 WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; orange	Item No.: 793-5501/000-005 WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; red	Item No.: 793-5501/000-024 WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; violet
			
Item No.: 793-5501 WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white	Item No.: 793-5501/000-002 WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow	Item No.: 794-5553/000-002 WMB marking card; as card; MARKED; k/l (each 50); stretchable 5 - 5.2 mm; Horizontal marking; snap-on type; yellow	Item No.: 793-501/000-006 WMB marking card; as card; not stretchable; plain; snap-on type; blue



1.2.7.2 Marker



Item No.: 793-501/000-007
WMB marking card; as card; not stretchable; plain; snap-on type; gray



Item No.: 793-501/000-023
WMB marking card; as card; not stretchable; plain; snap-on type; green



Item No.: 793-501/000-017
WMB marking card; as card; not stretchable; plain; snap-on type; light green



Item No.: 793-501/000-012
WMB marking card; as card; not stretchable; plain; snap-on type; orange



Item No.: 793-501/000-005
WMB marking card; as card; not stretchable; plain; snap-on type; red



Item No.: 793-501/000-024
WMB marking card; as card; not stretchable; plain; snap-on type; violet



Item No.: 793-501
WMB marking card; as card; not stretchable; plain; snap-on type; white



Item No.: 793-501/000-002
WMB marking card; as card; not stretchable; plain; snap-on type; yellow



Item No.: 2009-115/000-006
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue



Item No.: 2009-115/000-007
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray



Item No.: 2009-115/000-023
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green



Item No.: 2009-115/000-017
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green



Item No.: 2009-115/000-012
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange



Item No.: 2009-115/000-024
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet



Item No.: 2009-115
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white



Item No.: 2009-115/000-002
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

1.2.8 Protective warning marker

1.2.8.1 Cover



Item No.: 282-415
Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow

1.2.9 Test and measurement

1.2.9.1 Testing accessories



Item No.: 209-170
Test plug adapter; 8.3 mm wide; for 4 mm Ø test plugs; suitable for 1.5 mm² - 10 mm² tbs; gray

1.2.10 Tool


1.2.10.1 Operating tool




Item No.: 210-721
Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured

Installation Notes

Conductor termination




CAGE CLAMP® connection
Inserting a conductor via operating tool (5.5 x 0.8 mm blade).



Additional CAGE CLAMP® connection on the measurement device side, e.g., when connecting wire commoning chains or applying an external voltage.


Commoning



Inserting an insulated, touch-proof adjacent jumper into the protected shorting position.




Terminal strip permanently prepared for current transformer circuits.



Additional commoning possible with circuit-related adjacent jumpers or testing option via test plug adapter (209-170) on transformer side.

Locking system




Lock-out snaps into one of two notched positions, preventing accidental operation of the disconnect link.




Interlocking link mechanically locks multiple links for multi-pole switching applications.




Snapping transparent locking cover onto 1–8 disconnect links:
a) Mechanically lock several links for multi-pole switching applications
b) Protect markers




A lock-out seal can be used on the disconnect link in notched "I" position.




Disconnect link in notched "I" position





Disconnect link in notched "I" position
In "I" operating position, the measurement device is connected to the transformer.
B = shorting link, P = test socket



Disconnect link in transition from "I" --> "TEST" (terminal blocks 1 + 2)





Disconnect link in transition from "I" --> "TEST" (terminal blocks 1 + 2)
The transformer is **not** disconnected from the measurement device, yet the shorting path is activated by moving disconnect link B from "I" to "TEST."
B = shorting link, P = test socket



Disconnect link in notched "TEST" position (terminal blocks 1 + 2)

Disconnect link in notched "TEST" position (terminal blocks 1 + 2)

The measurement device/relay is electrically disconnected from the transformer. In this position, if necessary, external voltage can be applied via the test socket, or the 2nd CAGE CLAMP® connection for relay testing in transformer protection circuits.
B = shorting link, P = test socket




Disconnect link in notched "I" position (terminal block 2)
Disconnect link in notched "TEST" position (terminal block 1) – measurement testing

Disconnect link in notched "I" position (terminal block 2)


Disconnect link in notched "TEST" position (terminal block 1) – measurement testing

Before moving the disconnect link of terminal block 1 into the notched "TEST" position, the reference current meter must be inserted into the test socket of terminal block 1.
B = shorting link, P = test socket

Testing





Touch-proof test sockets for touch-proof 4 mm Ø test plugs (not available from WAGO, but are offered by industry suppliers such as, Fabrikat Multi-Contact)



Terminal blocks required:
1 x disconnect/test terminal block (282-870)
1 x through terminal block (282-865)
1 x jumper, orange (282-424)
1 x end plate, orange (282-386)
In addition: locking cover, lock-out


Measuring set for a single-phase current transformer (without measurement testing)



Terminal blocks required:
6 x disconnect/test terminal block (282-870)
3 x jumper, orange (282-424)
3 x end plate, orange (282-386)
In addition: interlocking link, locking cover, lock-out

Measuring set for a three-phase current transformer

Pairs of disconnect links are interconnected via interlocking link or locking cover. Measurement testing is performed after the interlocking is released.
B = shorting link, P = test socket



Terminal blocks required:
6 x disconnect/test terminal block (282-870)
5 x jumper, orange (282-424)
2 x jumper, gray (282-402)
1 x end plate, orange (282-386)
In addition: interlocking link, locking cover, lock-out

Measuring set for a three-phase current transformer with 'Y' point
All six disconnect links are interconnected via interlocking link.
B = shorting link, P = test socket, kP = 'Y' point jumper

Marking



Labeling via WMB Multi Marking System.