


Data Sheet | Item Number: 734-127

Strain relief plate; for female and male connectors; 6 mm wide; 1 part; Pin spacing 3.5 mm; light gray

<https://www.wago.com/734-127>



Color: ■ light gray

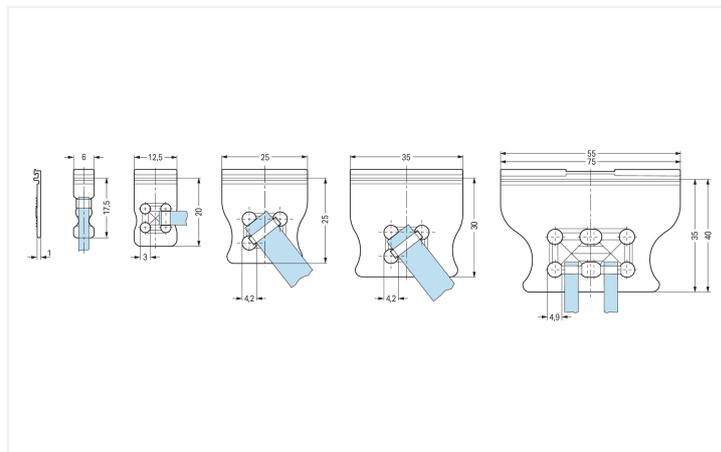

Dimensions in mm

The arrangement of the attachments for cable ties allows single conductors or multi-core cables to be secured in different ways. The width of the cable ties must correspond to the hole dimensions of the strain relief plates shown above.

Physical data

Width	6 mm / 0.236 inches
Height	1.87 mm / 0.074 inches
Depth	19.5 mm / 0.768 inches

Mechanical data

Mounting type	insert
Suitable	for standard male and female connectors (2.5 mm; 3.5 mm; 5 mm; 7.5 mm pin spacing)

Material data

Note (material data)	Information on material specifications can be found here
Color	light gray
Fire load	0.004 MJ
Weight	0.1 g

Commercial data

Product Group	3 (Multi Conn. System)
PU (SPU)	100 (25) pcs
Packaging type	Box
Country of origin	DE
GTIN	4017332428743
Customs tariff number	85389099990

Product classification	
UNSPSC	39121721
eCl@ss 10.0	27-44-04-92
eCl@ss 9.0	27-44-04-92
ETIM 9.0	EC002848
ETIM 8.0	EC002848
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

Approvals for marine applications



Approval	Standard	Certificate Name
LR Lloyds Register	IEC 61984	96/20035 (E5)

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 734-127	↓

Documentation

Additional Information			
Technical Section	03.04.2019	pdf 2027.26 KB	↓


CAD/CAE-Data

CAD data	
2D/3D Models 734-127	↓

CAE data	
ZUKEN Portal 734-127	↓

Installation Notes

Installation



Strain relief plates for factory or in-the-field assembly

Application



Strain relief plate, for factory assembly
1-conductor female connector, 2.5 mm pin spacing, light gray,
12-pole, with strain relief plate
733-112/034-000

Application



Strain relief plate, for factory assembly
1-conductor female connector, 2.5 mm pin spacing, light gray,
2-pole, with strain relief plate
(733-102/032-000)