

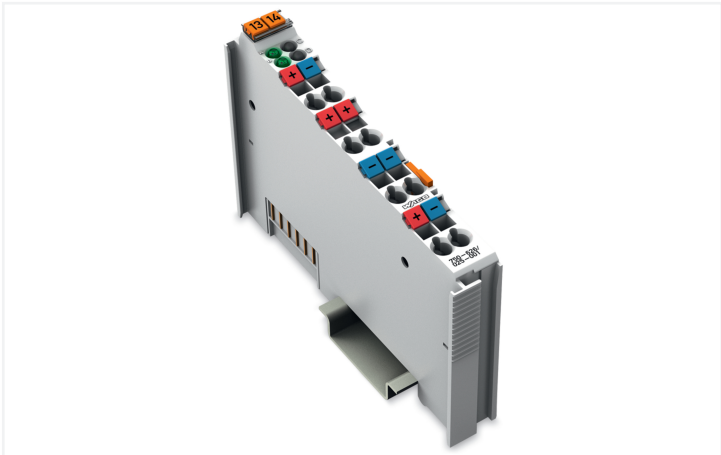
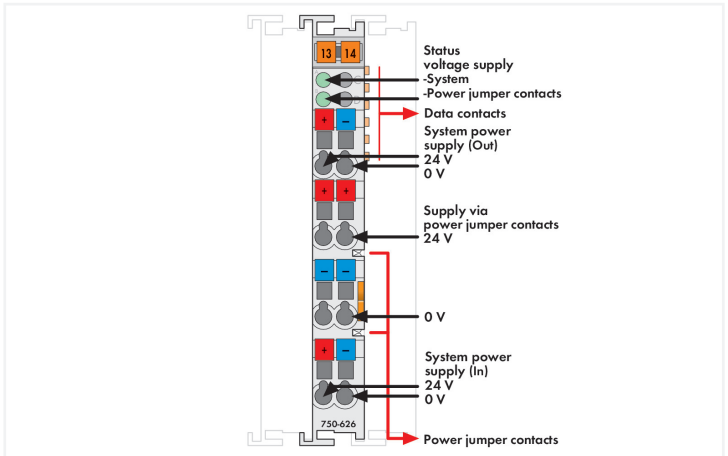


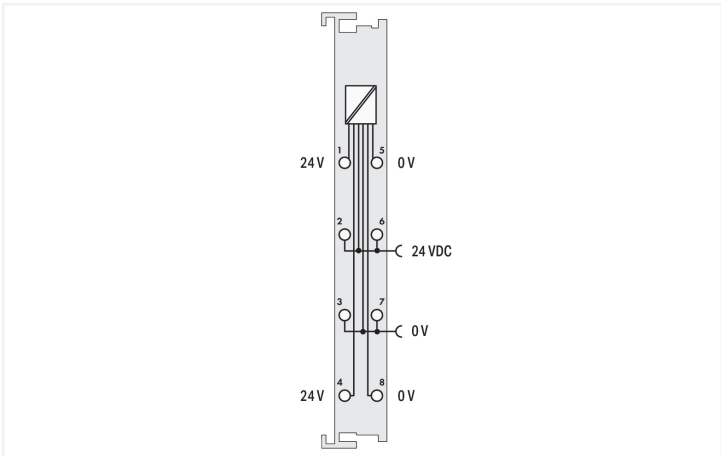

Color: ■ light gray

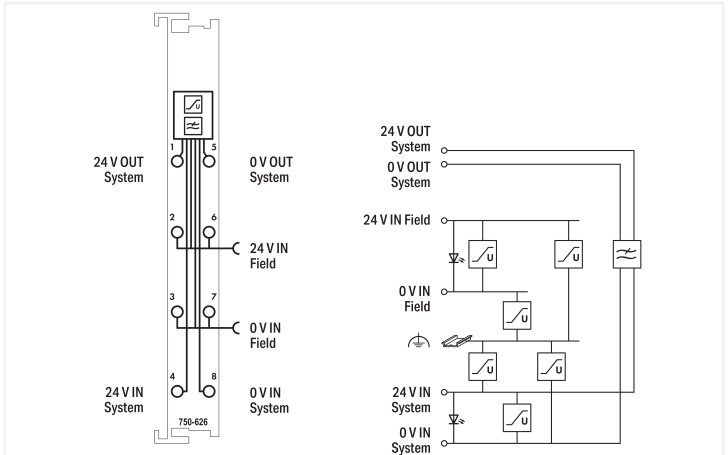

The WAGO I/O System 750 can also be used in marine applications and onshore/offshore installations (e.g., platforms, loading facilities). This is possible via certification under the standards of leading agencies such as Germanischer Lloyd and Lloyd's Register. This filter module ensures proper (certified) system operation. The module filters the 24 V system power supply and is equipped with surge suppression. High-insulation versions are streamlined for use in systems with insulation monitoring.

| Technical data                                    |                                                                                                                                                              |
|---------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Signal type                                       | Voltage                                                                                                                                                      |
| Signal type (voltage)                             | 24 VDC                                                                                                                                                       |
| Supply voltage (system)                           | 24 VDC (-25 ... +30 %); via pluggable connector (CAGE CLAMP® connection)                                                                                     |
| Supply voltage (field)                            | 24 VDC (-25 ... +30 %); via power jumper contacts (power supply via CAGE CLAMP® connection; transmission (field-side supply voltage only) via spring contact |
| Current via system voltage (max.)                 | 1.5 A (1 A up to hardware 04)                                                                                                                                |
| Current carrying capacity (power jumper contacts) | 10 A                                                                                                                                                         |
| Number of outgoing power jumper contacts          | 2                                                                                                                                                            |
| Use                                               | Marine-certified operation in conjunction with 750 Series Couplers and Controllers                                                                           |
| Indicators                                        | LED (A, B) green: operating voltage status: system, power jumper contacts                                                                                    |

### Connection data

|                                      |                                              |
|--------------------------------------|----------------------------------------------|
| Connectable conductor materials      | Copper                                       |
| Connection type                      | System/field supply                          |
| Solid conductor                      | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG |
| Fine-stranded conductor              | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG |
| Strip length                         | 8 ... 9 mm / 0.31 ... 0.35 inches            |
| Connection technology: field supply  | 4 x CAGE CLAMP®                              |
| Connection technology: system supply | 4 x CAGE CLAMP®                              |

### Physical data

|                                   |                        |
|-----------------------------------|------------------------|
| Width                             | 12 mm / 0.472 inches   |
| Height                            | 100 mm / 3.937 inches  |
| Depth                             | 69.8 mm / 2.748 inches |
| Depth from upper-edge of DIN-rail | 62.6 mm / 2.465 inches |

### Mechanical data

|                     |             |
|---------------------|-------------|
| Mounting type       | DIN-35 rail |
| Pluggable connector | fixed       |

### Material data

|                    |                              |
|--------------------|------------------------------|
| Color              | light gray                   |
| Housing material   | Polycarbonate; polyamide 6.6 |
| Fire load          | 1.039 MJ                     |
| Weight             | 50 g                         |
| Conformity marking | CE                           |

### Environmental requirements

|                                                                                    |                                                                                                                                                                                                   |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Ambient temperature (operation)                                                    | -20 ... +60 °C                                                                                                                                                                                    |
| Ambient temperature (storage)                                                      | -40 ... +85 °C                                                                                                                                                                                    |
| Protection type                                                                    | IP20                                                                                                                                                                                              |
| Pollution degree                                                                   | 2 per IEC 61131-2                                                                                                                                                                                 |
| Operating altitude                                                                 | 0 ... 2000 m / 0 ... 6562 ft                                                                                                                                                                      |
| Mounting position                                                                  | Horizontal left, horizontal right, horizontal top, horizontal bottom, vertical top and vertical bottom                                                                                            |
| Relative humidity (without condensation)                                           | 95 %                                                                                                                                                                                              |
| Relative humidity (with condensation)                                              | Short-term condensation per Class 3K6/IEC EN 60721-3-3 and E-DIN 40046-721-3, accounting for a temperature range of -20 to +60 °C (except for wind-driven precipitation, water and ice formation) |
| Vibration resistance                                                               | 4g per IEC 60068-2-6                                                                                                                                                                              |
| Shock resistance                                                                   | 15g per IEC 60068-2-27                                                                                                                                                                            |
| EMC immunity to interference                                                       | per EN 61000-6-2, marine applications                                                                                                                                                             |
| EMC emission of interference                                                       | per EN 61000-6-4, marine applications                                                                                                                                                             |
| Exposure to pollutants                                                             | per IEC 60068-2-42 and IEC 60068-2-43                                                                                                                                                             |
| Permissible H <sub>2</sub> S contaminant concentration at a relative humidity 75 % | 10 ppm                                                                                                                                                                                            |
| Permissible SO <sub>2</sub> contaminant concentration at a relative humidity 75 %  | 25 ppm                                                                                                                                                                                            |



| Commercial data       |                 |
|-----------------------|-----------------|
| Product Group         | 15 (I/O System) |
| PU (SPU)              | 1 pcs           |
| Packaging type        | Box             |
| Country of origin     | DE              |
| GTIN                  | 4050821388524   |
| Customs tariff number | 85389091890     |

| Product classification |                      |
|------------------------|----------------------|
| UNSPSC                 | 39121610             |
| eCl@ss 10.0            | 27-24-26-10          |
| eCl@ss 9.0             | 27-24-26-10          |
| ETIM 9.0               | EC001600             |
| ETIM 8.0               | EC001600             |
| ECCN                   | NO US CLASSIFICATION |

| Environmental Product Compliance          |                                           |
|-------------------------------------------|-------------------------------------------|
| CAS-No.                                   | 1303-86-2<br>1317-36-8<br>7439-92-1       |
| REACH Candidate List Substance            | Diboron trioxide<br>Lead<br>Lead monoxide |
| RoHS Compliance Status                    | Compliant,With Exemption                  |
| RoHS Exemption                            | 7(a)<br>7(c)-I<br>7(c)-II                 |
| SCIP notification number (Austria)        | 004fdd05-2cac-45b2-ba14-8c229cdadf4e      |
| SCIP notification number (Belgium)        | 5b65e576-14e9-4c85-9c01-1aa0d1742507      |
| SCIP notification number (Bulgaria)       | 6f0b91d2-8114-4468-9d34-8a94cc981cda      |
| SCIP notification number (Czech Republic) | 3d64bca0-8cf6-4d90-a11a-a4da45d4342e      |
| SCIP notification number (Denmark)        | ba6b3262-601a-405b-83fd-539ce8c807e3      |
| SCIP notification number (Finland)        | e30a49e0-84b8-422d-983e-9cffc3697763      |
| SCIP notification number (France)         | 1a48804a-fb6b-4630-88bd-9b9a2fd92ed5      |
| SCIP notification number (Germany)        | 92b394b5-e140-4a47-98a5-87437748d936      |
| SCIP notification number (Hungary)        | 51ca832a-c6fb-4f75-bbd0-d7a5b892620d      |
| SCIP notification number (Italy)          | 4f74a02f-5bcc-440f-932f-2bcb29caa921      |
| SCIP notification number (Netherlands)    | efc526a9-dd14-4229-82eb-4a8c879f6737      |
| SCIP notification number (Poland)         | 88d2dcc1-f6a9-4f29-afe0-3b1608a334b0      |
| SCIP notification number (Romania)        | 2c103830-0440-42a0-9aee-fc6f8b358f09      |
| SCIP notification number (Sweden)         | 40f355d1-8d10-4f5b-85b7-b502e76766ab      |

| Approvals / Certificates                                                                                                                                                                                                                                   |                        |                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------------------------------------------------------------|
| General approvals                                                                                                                                                                                                                                          |                        | Declarations of conformity and manufacturer's declarations |
|    |                        |                                                            |
| Approval                                                                                                                                                                                                                                                   | Standard               | Certificate Name                                           |
| EAC<br>GZO Almaty Standart                                                                                                                                                                                                                                 | TP TC 020/2011         | EAC CoC 03083                                              |
| KC<br>National Radio Research Agency                                                                                                                                                                                                                       | Article 58-2, Clause 3 | MSIP-REM-W43-IDE750                                        |
| UL<br>Underwriters Laboratories Inc. (ORDINARY LOCATIONS)                                                                                                                                                                                                  | UL 508                 | E175199                                                    |
|                                                                                                                                                                                                                                                            |                        | Approval                                                   |
|                                                                                                                                                                                                                                                            |                        | EU-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG    |
|                                                                                                                                                                                                                                                            |                        | UK-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG    |



Approvals for marine applications

|  |  |  |  |
|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| Approval                                                                         | Standard                                                                          | Certificate Name                                                                  |                                                                                   |
| ABS<br>American Bureau of Ship-<br>ping                                          | -                                                                                 | 22-2227356-PDA                                                                    |                                                                                   |
| BSH<br>Bundesamt fuer See-<br>schifffahrt und Hydrogra-<br>phie                  | -                                                                                 | 1104                                                                              |                                                                                   |
| LR<br>Lloyds Register                                                            | -                                                                                 | LR2475997TA                                                                       |                                                                                   |
| PRS<br>Polski Rejestr Statków                                                    | -                                                                                 | TE/1102/880590/23                                                                 |                                                                                   |

Approvals for hazardous areas

|  |  |  |  |  |  |  |  |  |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Approval                                                                          | Standard                                                                          | Certificate Name                                                                   |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| ATEX<br>TUEV Nord Cert GmbH                                                       | EN 60079-0                                                                        | TUEV14ATEX148929X (II 3 G Ex ec IIC T4 Gc)                                         |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| CCCEX<br>CQST/CNEx                                                                | CNCA-C23-01                                                                       | 2020312310000213 (Ex ec IIC T4 Gc)                                                 |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| IECEX<br>TUEV Nord Cert GmbH                                                      | IEC 60079-0                                                                       | IECEX TUN 14.0035 X (Ex ec IIC T4 Gc)                                              |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| INMETRO<br>TÜV Rheinland do Brasil Ltda.                                          | IEC 60079-0                                                                       | TÜV 12.1297 X                                                                      |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| UKEx<br>WAGO GmbH & Co. KG                                                        | EN 60079-0                                                                        | UKCA_WA GO22UKEX003X_ec                                                            |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| UL<br>Underwriters Laboratories Inc. (HAZARDOUS LOCATIONS)                        | UL 121201                                                                         | E198726                                                                            |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |

Downloads

Environmental Product Compliance

| Compliance Search                                   |
|-----------------------------------------------------|
| Environmental Product Compliance<br>750-626/025-001 |

Documentation

| Manual                       |         |                   |                                                                                     |
|------------------------------|---------|-------------------|-------------------------------------------------------------------------------------|
| Product Manual Filter module | V 1.4.0 | pdf<br>2012.40 KB |  |
| System Manual Series 750/753 |         |                   |  |

| System Description                                      |  |                  |                                                                                       |
|---------------------------------------------------------|--|------------------|---------------------------------------------------------------------------------------|
| 750/753 Series I/O-System – General Product Information |  | pdf<br>953.35 KB |  |
| Overview on WAGO-I/O-SYSTEM 750 approvals               |  | pdf<br>770.48 KB |  |

| Bid Text        |            |                 |                                                                                     |
|-----------------|------------|-----------------|-------------------------------------------------------------------------------------|
| 750-626/025-001 | 19.02.2019 | xml<br>4.50 KB  |  |
| 750-626/025-001 | 06.10.2017 | doc<br>28.00 KB |  |

| Instruction Leaflet             |            |                  |                                                                                       |
|---------------------------------|------------|------------------|---------------------------------------------------------------------------------------|
| CCC Ex (Additional information) | 26.04.2023 | pdf<br>159.76 KB |  |



| CAD/CAE-Data                    |                                      |
|---------------------------------|--------------------------------------|
| CAD data                        | CAE data                             |
| 2D/3D Models<br>750-626/025-001 | EPLAN Data Portal<br>750-626/025-001 |
|                                 | WSCAD Universe<br>750-626/025-001    |
|                                 | ZUKEN Portal<br>750-626/025-001      |

| Device Files                                       |                       |                   |  |
|----------------------------------------------------|-----------------------|-------------------|--|
| Device Driver                                      |                       |                   |  |
| WAGO USB Service Kabel Treiber / Serie 750 und 857 | 6.5.3.0<br>10.09.2014 | zip<br>4721.96 KB |  |

| 1 Compatible Products        |
|------------------------------|
| 1.1 Optional Accessories     |
| 1.1.1 DIN-rail               |
| 1.1.1.1 Mounting accessories |

|                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                               |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>Item No.: 210-196</b><br>Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored               | <br><b>Item No.: 210-198</b><br>Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored         | <br><b>Item No.: 210-508</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored | <br><b>Item No.: 210-197</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored                     |
| <br><b>Item No.: 210-506</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored       | <br><b>Item No.: 210-114</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored            | <br><b>Item No.: 210-118</b><br>Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored         | <br><b>Item No.: 210-115</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored |
| <br><b>Item No.: 210-112</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored | <br><b>Item No.: 210-504</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored | <br><b>Item No.: 210-113</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored          | <br><b>Item No.: 210-505</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored      |

| 1.1.2 Marking                                                                                                                           |
|-----------------------------------------------------------------------------------------------------------------------------------------|
| 1.1.2.1 Group marker carrier                                                                                                            |
| <br><b>Item No.: 750-106</b><br>Group marker carrier |



1.1.2.2 Marker

|                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                         |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>Item No.: 750-100</b><br>Marker card; as a DIN A4 sheet; plain                                                                                 | <br><b>Item No.: 2009-145/000-006</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue | <br><b>Item No.: 2009-145/000-007</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray   | <br><b>Item No.: 2009-145/000-023</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green |
| <br><b>Item No.: 2009-145/000-012</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange | <br><b>Item No.: 2009-145/000-005</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red  | <br><b>Item No.: 2009-145/000-024</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet | <br><b>Item No.: 2009-145</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white         |
| <br><b>Item No.: 2009-145/000-002</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow | <br><b>Item No.: 248-501/000-006</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue                                  | <br><b>Item No.: 248-501/000-007</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray                                    | <br><b>Item No.: 248-501/000-023</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green                                  |
| <br><b>Item No.: 248-501/000-017</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green                             | <br><b>Item No.: 248-501/000-012</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange                                | <br><b>Item No.: 248-501/000-005</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red                                     | <br><b>Item No.: 248-501/000-024</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet                                 |
| <br><b>Item No.: 248-501</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white                                           | <br><b>Item No.: 248-501/000-002</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow                                |                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                         |

1.1.2.3 Marker carrier

|                                                                                                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>Item No.: 750-103</b><br>Group marker carrier |
|-----------------------------------------------------------------------------------------------------------------------------------------|

1.1.3 Shield termination

1.1.3.1 Shield clamping saddles

|                                                                                                                                                                                                      |                                                                                                                                                                     |                                                                                                                                                                                                      |                                                                                                                                                                        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>Item No.: 790-108</b><br>Shield clamping saddle; 11 mm wide; diameter of compatible conductor; 3 ... 8 mm  | <br><b>Item No.: 790-208</b><br>Shield clamping saddle; 12.4 mm wide; 3 ... 8 mm | <br><b>Item No.: 790-116</b><br>Shield clamping saddle; 19 mm wide; diameter of compatible conductor; 7 ... 16 mm | <br><b>Item No.: 790-216</b><br>Shield clamping saddle; 21.8 mm wide; 6 ... 16 mm |
| <br><b>Item No.: 790-124</b><br>Shield clamping saddle; 27 mm wide; diameter of compatible conductor; 6 ... 24 mm | <br><b>Item No.: 790-220</b><br>Shield clamping saddle; 30 mm wide; 6 ... 20 mm  | <br><b>Item No.: 790-140</b><br>Shield clamping saddle; diameter of compatible conductor                          |                                                                                                                                                                        |



1.1.4 System enclosure

1.1.4.1 System enclosure

|                                                                                                                                                                                                                              |                                                                                                                                                                                                                              |                                                                                                                                                                                                                                |                                                                                                                                                                                                                         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>Item No.: 850-825</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (160x100x160 mm); 9 x M12, 4 x M20                              | <br><b>Item No.: 850-826</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip         | <br><b>Item No.: 850-827</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip          | <br><b>Item No.: 850-828</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip |
| <br><b>Item No.: 850-826/002-000</b><br>IP65 enclosure; Aluminium (RAL 7035); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip | <br><b>Item No.: 850-827/002-000</b><br>IP65 enclosure; Aluminium (RAL 7035); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip | <br><b>Item No.: 850-828/002-000</b><br>IP65 enclosure; Aluminium (RAL 7035); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip | <br><b>Item No.: 850-834</b><br>IP65 enclosure; Polyester (RAL 7032); WxHxD (164x100x164 mm); 9 x M12, 4 x M20                       |
| <br><b>Item No.: 850-835</b><br>IP65 enclosure; Polyester (RAL 7032); WxHxD (244x100x164 mm); 4 x M20, 4 x M16, 14 x M12 cable grip         | <br><b>Item No.: 850-836</b><br>IP65 enclosure; Polyester (RAL 7032); WxHxD (324x100x164 mm); 4 x M20, 8 x M16, 17 x M12 cable grip         | <br><b>Item No.: 850-814/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (200x120x200 mm); without flange plate                 | <br><b>Item No.: 850-815/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (300x120x200 mm); without flange plate         |
| <br><b>Item No.: 850-816/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (400x120x200 mm); without flange plate                | <br><b>Item No.: 850-817/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (600x120x200 mm); without flange plate                |                                                                                                                                                                                                                                |                                                                                                                                                                                                                         |

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: [www.wago.com](https://www.wago.com)