





Data Sheet | Item Number: 857-734

Solid-state relay module; Nominal input voltage: 24 VDC; Output voltage range: 0 ... 30 VDC; Limiting continuous current: 8 A; Module width: 6 mm; gray


<https://www.wago.com/857-734>

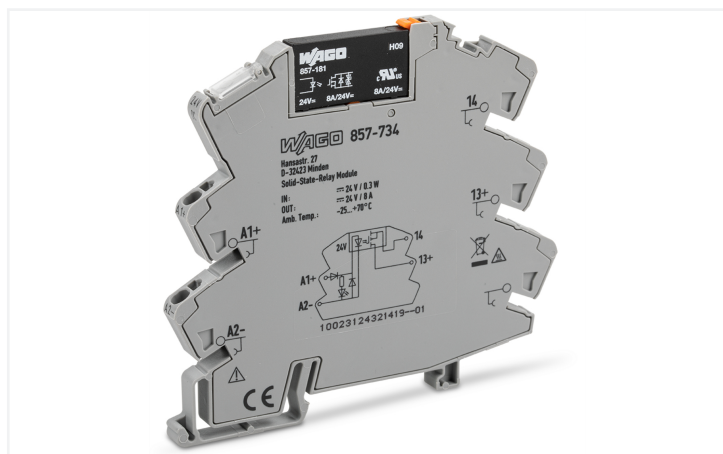

Color: gray

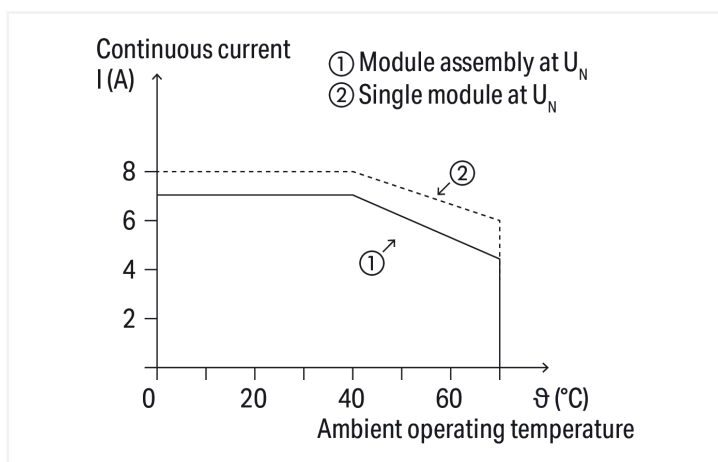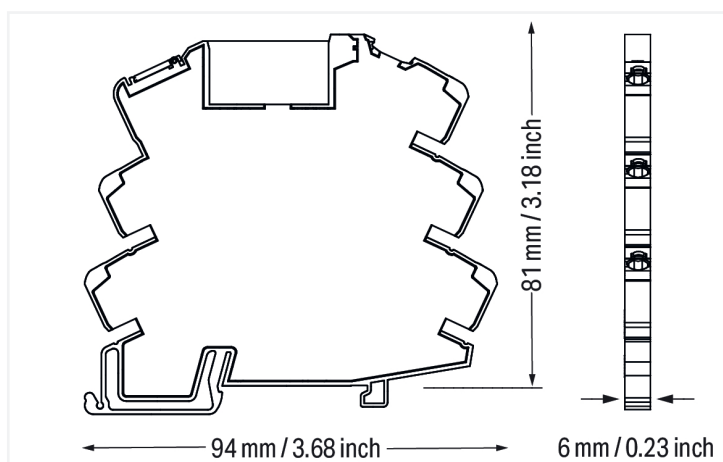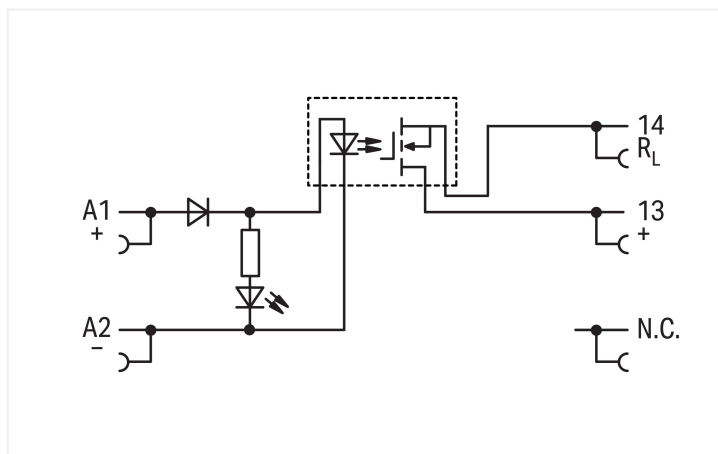

Current-carrying capacity curve

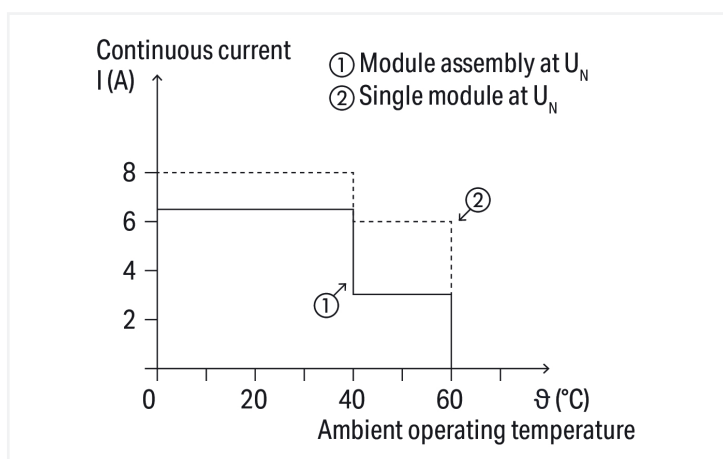

Current carrying capacity curve UL



Notes	
Safety Information	Adjacent devices of the same type are devices of the same design (series) that are arranged next to one another on the DIN-rail with the same orientation. An end stop (249-116) must be fitted to devices of other types for compliance with the reinforced insulation requirements.
Note	Optocouplers and solid state relays are designed for use in signal processing networks that are not supplied directly by the low-voltage power supply network.

Technical data			
Control circuit		Load circuit	
Nominal input voltage U _N	24 VDC (SELV)	Circuit type	2-wire connection
Input voltage range (low level)	0 ... 4 VDC	Limiting continuous current	8 A; 6 A (UL)
Input voltage range (high level)	16.8 ... 30 VDC	Nominal output voltage	24 VDC (SELV)
Nominal input current at U _N	12 mA	Output voltage range	1 ... 30 VDC
Power loss (max.) P _{I (max.)}	0.3 W	Voltage drop	≤ 0.8 VDC
		Leakage current at rated voltage	≤ 1 µA
		Switching current (min.)	10 mA
		Turn-on time	≤ 60 µs
		Turn-off time	≤ 250 µs
		Switching frequency	≤ 500 Hz

Signaling	
Status indicator	Yellow LED

Safety and protection	
Rated Voltage	300 V
Overvoltage category	II
Pollution degree	2
Dielectric strength (control/load circuit) (AC, 1 min)	3.51 kVrms
Insulation type (between adjacent devices of the same type)	Double insulation (safe isolation)
Insulation type (to adjacent devices of different types)	Basic insulation
Safety Information	Adjacent devices of the same type are devices of the same design (series) that are arranged next to one another on the DIN-rail with the same orientation. An end stop (249-116) must be fitted to devices of other types for compliance with the reinforced insulation requirements.
Protection type	IP20

Connection data	
Connection technology	Push-in CAGE CLAMP®
Solid conductor	0.34 ... 2.5 mm² / 22 ... 14 AWG
Fine-stranded conductor	0.34 ... 2.5 mm² / 22 ... 14 AWG
Fine-stranded conductor; with insulated ferrule	0.34 ... 1.5 mm² / 22 ... 16 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches



Physical data	
Width	6 mm / 0.236 inches
Height	94 mm / 3.701 inches
Depth from upper-edge of DIN-rail	81 mm / 3.189 inches

Mechanical data	
Mounting type	DIN-35 rail
Mounting position	horizontal (standing/lying); vertical

Material data	
Note (material data)	Information on material specifications can be found here
Color	gray
Insulation material (main housing)	Polyamide (PA66)
Material group	I
Flammability class per UL94	V0
Fire load	0.535 MJ
Weight	28.9 g

Environmental requirements	
Ambient temperature (operation at U _N)	-25 ... +70 °C
Ambient temperature UL (operation at U _N)	-25 ... +60 °C
Ambient temperature (storage)	-40 ... +70 °C
Processing temperature	-25 ... +50 °C
Temperature range of connection cable	≥ (T _{ambient} + 30 K)
Relative humidity	5 ... 85 % (no condensation permissible)
Operating altitude (max.)	2000 m

Standards and specifications	
Standards/specifications	EN 61010-2-201 EN 61373 EN 61000-6-2 EN 61000-6-3 EN 50121-3-2 EN 50121-4

Basic relay	
WAGO Basic Relay	857-181

Commercial data	
PU (SPU)	25 (1) pcs
Packaging type	Box
Country of origin	CN
GTIN	4055143851176
Customs tariff number	85365005000



Product classification	
UNSPSC	39122334
ETIM 9.0	EC001504
ETIM 8.0	EC001504
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
CAS-No.	7439-92-1 79-94-7
REACH Candidate List Substance	2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	7(a)
SCIP notification number (Austria)	f7fd8389-69bb-4e6f-a1e9-fc1776998c6e
SCIP notification number (Belgium)	40681947-5038-4488-83cb-4416cb9c51b7
SCIP notification number (Bulgaria)	31db28dd-f09a-4e31-a7a6-fd8924a3395b
SCIP notification number (Czech Republic)	6aa2a734-dc16-48e1-837f-5764495677a1
SCIP notification number (Denmark)	2204a812-679a-4767-83f3-acadca70c64c
SCIP notification number (Finland)	2b96f4ab-0baf-46ce-b8a4-87fd619f7e96
SCIP notification number (France)	0016234e-151d-40d3-a51d-e4523d4dd1fa
SCIP notification number (Germany)	eee3505a-635c-4aa1-aff7-0e2acc8ba42e
SCIP notification number (Hungary)	83d51d9c-4402-4ac4-969d-7173d5986407
SCIP notification number (Italy)	7a89d2eb-e6e6-494d-b496-77a0100ae558
SCIP notification number (Netherlands)	b168aa95-0b5d-4c7e-9183-7c10a49fcde9
SCIP notification number (Poland)	5c9ba0ed-a7b4-4c2b-820a-0f1a97e8bbb5
SCIP notification number (Romania)	de10e405-92c2-4264-b1a8-953022403116
SCIP notification number (Sweden)	41efad63-4ffa-4e16-a4a3-b510b3b6919c

Approvals / Certificates		
General approvals		Declarations of conformity and manufacturer's declarations
  		
Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03078
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03081
UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 61010-2-201	E175199
Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 857-734

↓

Documentation

Bid Text			
857-734	19.02.2019	xml 4.12 KB	↓
857-734	08.01.2019	docx 16.25 KB	↓

CAD/CAE-Data

CAD data

2D/3D Models 857-734

↓

CAE data

ZUKEN Portal 857-734

↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Basic relay

1.1.1.1 Basic solid-state relay



[Item No.: 857-181](#)
Basic solid-state relay; Nominal input voltage: 24 VDC; Output voltage range: 0 ... 24 VDC

1.1.2 Ferrule

1.1.2.1 Ferrule









[Item No.: 216-241](#)
Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white

[Item No.: 216-242](#)
Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray

[Item No.: 216-243](#)
Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red

[Item No.: 216-244](#)
Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



1.1.3 Interface module

1.1.3.1 Interface adapters



[Item No.: 857-981](#)
Interface adapter; 14-pole; High-side switching input



[Item No.: 857-982](#)
Interface adapter; 14-pole; High-side switching output



[Item No.: 857-986](#)
Interface adapter; 15-pole; High-side switching input

1.1.4 Jumper

1.1.4.1 Jumper



[Item No.: 281-482](#)
Jumper; 2-way; insulated; gray



[Item No.: 859-410/000-006](#)
Jumper; for jumper slot; 10-way; insulated; blue



[Item No.: 859-410](#)
Jumper; for jumper slot; 10-way; insulated; light gray



[Item No.: 859-410/000-005](#)
Jumper; for jumper slot; 10-way; insulated; red



[Item No.: 859-410/000-029](#)
Jumper; for jumper slot; 10-way; insulated; yellow



[Item No.: 859-402/000-006](#)
Jumper; for jumper slot; 2-way; insulated; blue



[Item No.: 859-402](#)
Jumper; for jumper slot; 2-way; insulated; light gray



[Item No.: 859-402/000-005](#)
Jumper; for jumper slot; 2-way; insulated; red



[Item No.: 859-402/000-029](#)
Jumper; for jumper slot; 2-way; insulated; yellow



[Item No.: 859-403/000-006](#)
Jumper; for jumper slot; 3-way; insulated; blue



[Item No.: 859-403](#)
Jumper; for jumper slot; 3-way; insulated; light gray



[Item No.: 859-403/000-005](#)
Jumper; for jumper slot; 3-way; insulated; red



[Item No.: 859-403/000-029](#)
Jumper; for jumper slot; 3-way; insulated; yellow



[Item No.: 859-404/000-006](#)
Jumper; for jumper slot; 4-way; insulated; blue



[Item No.: 859-404](#)
Jumper; for jumper slot; 4-way; insulated; light gray



[Item No.: 859-404/000-005](#)
Jumper; for jumper slot; 4-way; insulated; red



[Item No.: 859-404/000-029](#)
Jumper; for jumper slot; 4-way; insulated; yellow



[Item No.: 859-405/000-006](#)
Jumper; for jumper slot; 5-way; insulated; blue



[Item No.: 859-405](#)
Jumper; for jumper slot; 5-way; insulated; light gray



[Item No.: 859-405/000-005](#)
Jumper; for jumper slot; 5-way; insulated; red



[Item No.: 859-405/000-029](#)
Jumper; for jumper slot; 5-way; insulated; yellow



[Item No.: 859-406/000-006](#)
Jumper; for jumper slot; 6-way; insulated; blue



[Item No.: 859-406](#)
Jumper; for jumper slot; 6-way; insulated; light gray



[Item No.: 859-406/000-005](#)
Jumper; for jumper slot; 6-way; insulated; red



[Item No.: 859-406/000-029](#)
Jumper; for jumper slot; 6-way; insulated; yellow



[Item No.: 859-407/000-006](#)
Jumper; for jumper slot; 7-way; insulated; blue



[Item No.: 859-407](#)
Jumper; for jumper slot; 7-way; insulated; light gray



[Item No.: 859-407/000-005](#)
Jumper; for jumper slot; 7-way; insulated; red



[Item No.: 859-407/000-029](#)
Jumper; for jumper slot; 7-way; insulated; yellow



[Item No.: 859-408/000-006](#)
Jumper; for jumper slot; 8-way; insulated; blue



[Item No.: 859-408](#)
Jumper; for jumper slot; 8-way; insulated; light gray



[Item No.: 859-408/000-005](#)
Jumper; for jumper slot; 8-way; insulated; red



[Item No.: 859-408/000-029](#)
Jumper; for jumper slot; 8-way; insulated; yellow



[Item No.: 859-409/000-006](#)
Jumper; for jumper slot; 9-way; insulated; blue



[Item No.: 859-409](#)
Jumper; for jumper slot; 9-way; insulated; light gray



[Item No.: 859-409/000-005](#)
Jumper; for jumper slot; 9-way; insulated; red



[Item No.: 859-409/000-029](#)
Jumper; for jumper slot; 9-way; insulated; yellow

1.1.5 Marking

1.1.5.1 Double marker carrier



[Item No.: 209-128](#)
Adaptor; gray

1.1.5.2 Group marker carrier



[Item No.: 249-105](#)
Group marker carrier; gray

1.1.5.3 Marker



[Item No.: 209-183](#)
Marker; white



[Item No.: 793-5501](#)
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white



[Item No.: 793-502](#)
WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white



[Item No.: 793-566](#)
WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; white



[Item No.: 793-503](#)
WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white



[Item No.: 793-504](#)
WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white



[Item No.: 793-505](#)
WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; white



[Item No.: 793-506](#)
WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; white



[Item No.: 793-501](#)
WMB marking card; as card; not stretchable; plain; snap-on type; white



[Item No.: 2009-115](#)
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

1.1.5.4 Marking device



[Item No.: 210-110](#)
Fiber-tip pen

1.1.5.5 Marking strip



[Item No.: 2009-110](#)
Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

1.1.5.6 Protective marker cover



[Item No.: 209-184](#)
Protection cover; transparent

1.1.6 Tool

1.1.6.1 Operating tool




Item No.: 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured


Installation Notes

Conductor termination



Conductor termination

Commoning



Easy commoning using adjacent jumpers

Marking



Marking via WMB Multi Marking System.

Installation



Removing a relay via ejector.