



Data Sheet | Item Number: 862-9603
4-conductor chassis-mount terminal strip; with ground contact; PE-N-L1; 3-pole;
for 3 mm Ø screw and nut; 4 mm²; white
<https://www.wago.com/862-9603>



Color: white

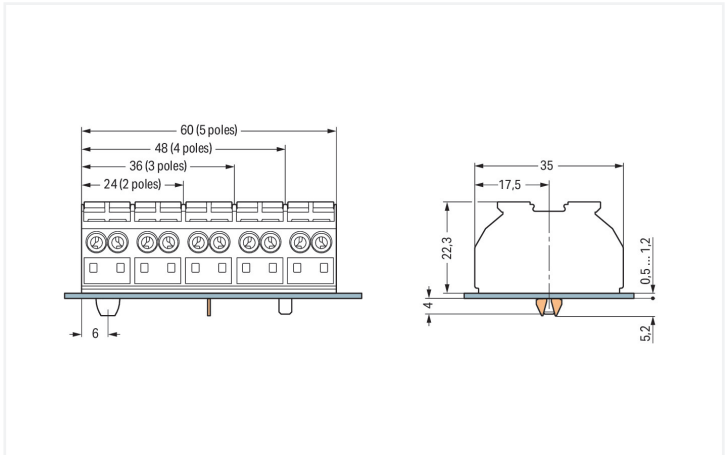

Dimensions in mm
Dimensions in mm
for chassis-mount terminal strips

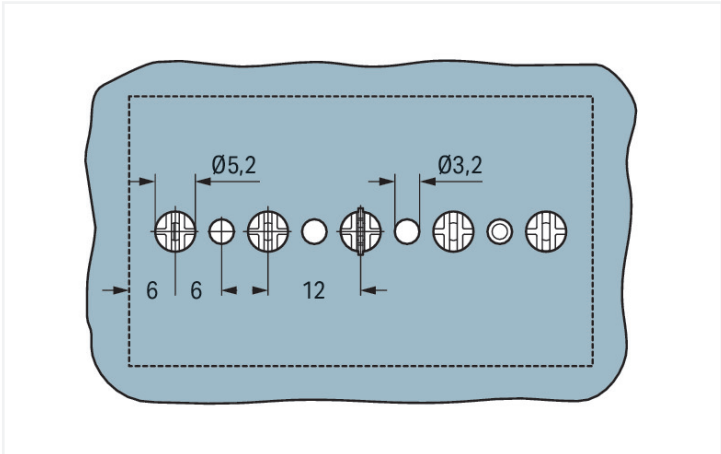

Dimensions in mm
for PE contact and snap-in mounting foot (Ø 5.2 mm)

Chassis-mount terminal strip, 862 Series, with 12 mm pin spacing

Our chassis-mount terminal strip (item number 862-9603) is designed for seamless electrical installations. Ensure that the strip lengths are between 10 mm and 11 mm when connecting conductors to this chassis-mount terminal strip. This product features conductor terminals and utilizes Push-in CAGE CLAMP®. Push-in CAGE CLAMP® technology provides a universal connection solution for all conductor types. It allows both solid and fine-stranded conductors with ferrules to be inserted directly into the clamping point without the need for tools. This chassis-mount terminal strip is suitable for conductor cross sections ranging from 0.5 mm² to 4 mm². There are twelve clamping points available that you can use to connect three different potentials / three poles. The white housing is made of polyamide (PA66) for insulation.

Electrical data	
Ratings per IEC/EN	
Nominal voltage (III/3)	500 V
Rated impulse withstand voltage (III / 3)	6 kV
Rated current	32 A
Legend (ratings)	(III / 3) Δ Overvoltage category III / Pollution degree 3



Connection data		
Clamping units	12	
Total number of potentials	3	
PE function	with ground contact	
Connection 1		
Connection technology	Push-in CAGE CLAMP®	
Actuation type	Push-button	
Connectable conductor materials	Copper	
Solid conductor	0.5 ... 4 mm² / 20 ... 12 AWG	
Solid conductor; push-in termination	0.75 ... 4 mm² / 18 ... 12 AWG	
Stranded conductor	0.5 ... 4 mm² / 20 ... 12 AWG	
Fine-stranded conductor	0.5 ... 4 mm² / 20 ... 12 AWG	
Fine-stranded conductor; with insulated ferrule	0.5 ... 1.5 mm² / 20 ... 16 AWG	
Fine-stranded conductor; with ferrule; push-in termination	0.75 ... 1.5 mm² / 18 ... 16 AWG	
Note (conductor cross-section)	Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination.	
Strip length	10 ... 11 mm / 0.39 ... 0.43 inches	
Pole number	3	
Wiring direction	Side-entry wiring	

Physical data		
Pin spacing	12 mm / 0.472 inches	
Width	36 mm / 1.417 inches	
Height	27.5 mm / 1.083 inches	
Height from the surface	22.3 mm / 0.878 inches	
Depth	35 mm / 1.378 inches	

Mechanical data		
Marking	⊕-N-L1	
Mounting type	Screw mount	

Material data		
Note (material data)	Information on material specifications can be found here	
Color	white	
Material group	I	
Insulation material (main housing)	Polyamide (PA66)	
Flammability class per UL94	V0	
Fire load	0.382 MJ	
Halogen-free	Yes	
Weight	21.1 g	

Commercial data		
PU (SPU)	250 pcs	
Packaging type	Bag	
Country of origin	DE	
GTIN	4044918511087	
Customs tariff number	85369010000	



Product classification		
UNSPSC		39121410
eCl@ss 10.0		27-14-11-06
eCl@ss 9.0		27-14-11-06
ETIM 9.0		EC001284
ETIM 8.0		EC001284
ECCN		NO US CLASSIFICATION

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
			Approval	Standard	Certificate Name
Approval	Standard	Certificate Name	EU-Declaration of Confor-	-	-
CCA	EN 60947	NTR NL 6912	mity		
DEKRA Certification B.V.			WAGO GmbH & Co. KG		
CCA	EN 60947	2146425.01	UK-Declaration of Confor-	-	-
DEKRA Certification B.V.			mity		
CSA	C22.2 No. 158	1505030	WAGO GmbH & Co. KG		
DEKRA Certification B.V.					
ENEC 15	EN 60998	143856-01			
UL International Germany GmbH					
UL	UL 1059	E45172			
UL International Germany GmbH					

Approvals for marine applications

Approval	Standard	Certificate Name
DNV GL	-	TAE00001V2
Det Norske Veritas, Germanischer Lloyd		
LR	EN 60947	91/20112 (E9)
Lloyds Register		

Downloads

Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 862-9603	



Documentation

Bid Text			
862-9603	19.02.2019	xml 3.71 KB	
862-9603	12.06.2017	doc 24.50 KB	

CAD/CAE-Data

CAD data
2D/3D Models 862-9603

CAE data
EPLAN Data Portal 862-9603
WSCAD Universe 862-9603
ZUKEN Portal 862-9603

1 Compatible Products

1.1 Optional Accessories

1.1.1 Ferrule

1.1.1.1 Ferrule

Item No.: 216-241 Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white	Item No.: 216-141 Ferrule; Sleeve for 0.5 mm² / 20 AWG; un-insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92	Item No.: 216-242 Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray	Item No.: 216-142 Ferrule; Sleeve for 0.75 mm² / 18 AWG; un-insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92
Item No.: 216-243 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red	Item No.: 216-143 Ferrule; Sleeve for 1 mm² / AWG 18; un-insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92	Item No.: 216-244 Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black	Item No.: 216-144 Ferrule; Sleeve for 1.5 mm² / AWG 16; un-insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92; silver-colored

1.1.2 Jumper

1.1.2.1 Jumper

Item No.: 862-482 Jumper; for conductor entry; insulated; black



1.1.3 Marking

1.1.3.1 Marking strip



Item No.: 709-177
Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent



Item No.: 709-178
Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white

1.1.4 Test and measurement

1.1.4.1 Testing accessories



Item No.: 210-136
Test plug; 2 mm Ø; with 500 mm cable; red


1.1.5 Tool

1.1.5.1 Operating tool




Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Installation Notes

**Cost-effective features:**

WAGO's 862 Series Chassis-Mount Terminal Strips were developed specifically to minimize wiring costs, while accommodating requirements for flexible mounting, multiple connection points and easy usage:

- Equipped with Push-in CAGE CLAMP®, the 862 Series connects up to four conductors sized 0.5 to 4 mm² (20 ... 12 AWG). Due to multiple connection points per pole, different conductor sizes can be used within the same terminal block position.
- For factory wiring, Push-in CAGE CLAMP® Connection Technology allows solid conductors, fine-stranded conductors with ferrules or ultrasonically bonded conductors from 0.5 ... 4 mm² (20 ... 12 AWG) to be terminated by simply pushing them into unit (length of bonded conductor end: min. 10 mm).
- Convenient automatic grounding contact (optional)
- Snap-in mounting feet for fast assembly
- Push-buttons for easy installation with an operating tool or by hand
- Built-in test points simplify testing with 2 mm Ø test plug
- Standard marking for each pole, or custom marking for large orders

Conductor termination

Terminating four conductors per pole – solid and fine-stranded.



Inserting a conductor via push-button.

Commoning

Commoning using a comb-style jumper bar (862-482).

Figure 1 illustrates the assembly sequence of a 10-pin connector. The sequence consists of five steps:

- Mounting the upper contact lead to the head pin.
- Mounting the first wire to the head pin.
- Mounting the plate to the head pin.
- Mounting the second wire to the head pin.
- Mounting the lower contact lead to the head pin.

Below the sequence, a perspective view of the connector shows the dimensions: 24, 26, 28, and 30.

Dimensions in mm

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: www.wago.com