
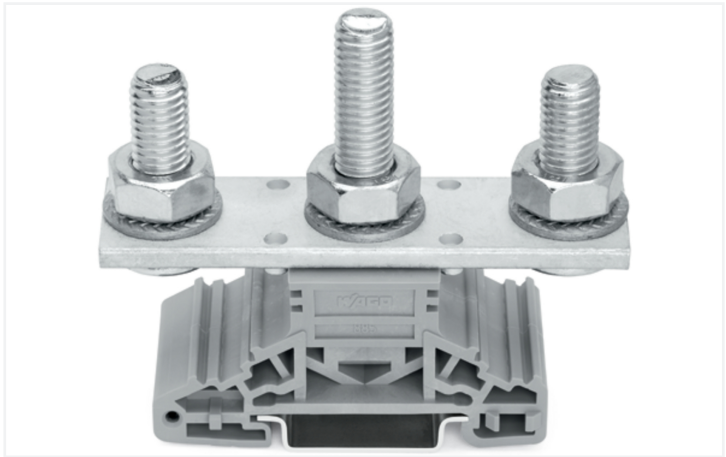


Data Sheet | Item Number: 885-310

Stud terminal block; lateral marker slots; for DIN-rail 35 x 15 and 35 x 7.5; 3 studs, M10; 120,00 mm²; gray

<https://www.wago.com/885-310>

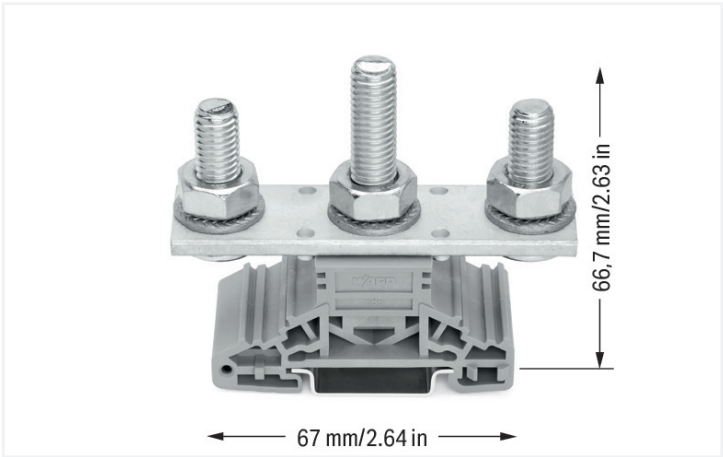

Color: ■ gray

Through terminal block, 885 Series, gray

This through terminal block (item number 885-310) streamlines wire connections, making them both quick and easy. Featuring conductor terminals along with a bolt-type connection, this connector outperforms the competition. It features one level and two clamping points for connecting a single potential. The gray housing is made of polyamide (PA66) for insulation. These high-current terminal blocks are mounted using DIN-35 rails..

Electrical data

Ratings per IEC/EN	
Nominal voltage (III/3)	1000 V
Rated impulse withstand voltage (III / 3)	8 kV
Rated current	269 A
Legend (ratings)	(III / 3) ≙ Overvoltage category III / Pollution degree 3

Approvals per		UL 1059		
Use group	B	C	D	
Rated voltage	-	-	-	

Approvals per		CSA 22.2 No 158		
Use group	B	C	D	
Rated voltage	-	-	-	

Power Loss	
Power loss, per pole (potential)	8.6833 W
Rated current I _N for specified power loss	269 A
Resistance value for specified, current-dependent power loss	0.00012 Ω

Connection data

Clamping units	2
Total number of potentials	1
Number of levels	1

Connection 1	
Connection technology	Bolt-type connection
Actuation type	Open-end, ring, socket wrench; 17 mm
Connectable conductor materials	Copper
Clamping range	6 ... 120 mm² / 10 AWG ... 250 kcmil
Type of cable lugs per DIN 46234	Cable lugs for solder-free connections Ring type, without insulating sleeve, for copper conductors
Type of cable lugs per DIN 46235	Cable lugs for compression connections Cover plate type for copper conductors
Thread size	M10



Physical data		
Width		33.8 mm / 1.331 inches
Height		67 mm / 2.638 inches
Depth from upper-edge of DIN-rail		66.7 mm / 2.626 inches

Mechanical data		
Tightening torque		10 ... 20 Nm
Mounting type		DIN-35 rail
Marking level		Side marking

Material data		
Note (material data)		Information on material specifications can be found here
Color		gray
Material group		I
Insulation material (main housing)		Polyamide (PA66)
Flammability class per UL94		V0
Fire load		0.831 MJ
Weight		227.3 g

Environmental requirements																																						
Processing temperature	-35 ... +85 °C	<table><tr><th colspan="2">Environmental Testing (Environmental Conditions)</th></tr><tr><td>Test specification Railway applications – Rolling stock – Electronic equipment</td><td>DIN EN 50155 (VDE 0115-200):2022-06</td></tr><tr><td>Test procedure Railway applications – Rolling stock equipment – Shock and vibration tests</td><td>DIN EN 61373 (VDE 0115-0106):2011-04</td></tr><tr><td>Spectrum/Installation location</td><td>Service life test, Category 1, Class A/B</td></tr><tr><td>Function test with noise-like vibration</td><td>Test passed according to Section 8 of the standard</td></tr><tr><td>Frequency</td><td>f₁ = 5 Hz to f₂ = 150 Hz f₁ = 5 Hz to f₂ = 150 Hz</td></tr><tr><td>Acceleration</td><td>0.101g (highest test level used for all axes) 0.572g (highest test level used for all axes) 5g (highest test level used for all axes)</td></tr><tr><td>Test duration per axis</td><td>10 min. 5 h</td></tr><tr><td>Test directions</td><td>X, Y and Z axes X, Y and Z axes X, Y and Z axes</td></tr><tr><td>Monitoring for contact faults/interruptions</td><td>Passed</td></tr><tr><td>Voltage drop measurement before and after each axis</td><td>Passed</td></tr><tr><td>Simulated service life test through increased levels of noise-like vibration</td><td>Test passed according to Section 9 of the standard</td></tr><tr><td>Extended test scope: Monitoring for contact faults/interruptions</td><td>Passed Passed</td></tr><tr><td>Extended test scope: Voltage drop measurement before and after each axis</td><td>Passed Passed</td></tr><tr><td>Shock test</td><td>Test passed according to Section 10 of the standard</td></tr><tr><td>Shock form</td><td>Half sine</td></tr><tr><td>Shock duration</td><td>30 ms</td></tr><tr><td>Number of shocks per axis</td><td>3 pos. und 3 neg.</td></tr></table>	Environmental Testing (Environmental Conditions)		Test specification Railway applications – Rolling stock – Electronic equipment	DIN EN 50155 (VDE 0115-200):2022-06	Test procedure Railway applications – Rolling stock equipment – Shock and vibration tests	DIN EN 61373 (VDE 0115-0106):2011-04	Spectrum/Installation location	Service life test, Category 1, Class A/B	Function test with noise-like vibration	Test passed according to Section 8 of the standard	Frequency	f ₁ = 5 Hz to f ₂ = 150 Hz f ₁ = 5 Hz to f ₂ = 150 Hz	Acceleration	0.101g (highest test level used for all axes) 0.572g (highest test level used for all axes) 5g (highest test level used for all axes)	Test duration per axis	10 min. 5 h	Test directions	X, Y and Z axes X, Y and Z axes X, Y and Z axes	Monitoring for contact faults/interruptions	Passed	Voltage drop measurement before and after each axis	Passed	Simulated service life test through increased levels of noise-like vibration	Test passed according to Section 9 of the standard	Extended test scope: Monitoring for contact faults/interruptions	Passed Passed	Extended test scope: Voltage drop measurement before and after each axis	Passed Passed	Shock test	Test passed according to Section 10 of the standard	Shock form	Half sine	Shock duration	30 ms	Number of shocks per axis	3 pos. und 3 neg.
Environmental Testing (Environmental Conditions)																																						
Test specification Railway applications – Rolling stock – Electronic equipment	DIN EN 50155 (VDE 0115-200):2022-06																																					
Test procedure Railway applications – Rolling stock equipment – Shock and vibration tests	DIN EN 61373 (VDE 0115-0106):2011-04																																					
Spectrum/Installation location	Service life test, Category 1, Class A/B																																					
Function test with noise-like vibration	Test passed according to Section 8 of the standard																																					
Frequency	f ₁ = 5 Hz to f ₂ = 150 Hz f ₁ = 5 Hz to f ₂ = 150 Hz																																					
Acceleration	0.101g (highest test level used for all axes) 0.572g (highest test level used for all axes) 5g (highest test level used for all axes)																																					
Test duration per axis	10 min. 5 h																																					
Test directions	X, Y and Z axes X, Y and Z axes X, Y and Z axes																																					
Monitoring for contact faults/interruptions	Passed																																					
Voltage drop measurement before and after each axis	Passed																																					
Simulated service life test through increased levels of noise-like vibration	Test passed according to Section 9 of the standard																																					
Extended test scope: Monitoring for contact faults/interruptions	Passed Passed																																					
Extended test scope: Voltage drop measurement before and after each axis	Passed Passed																																					
Shock test	Test passed according to Section 10 of the standard																																					
Shock form	Half sine																																					
Shock duration	30 ms																																					
Number of shocks per axis	3 pos. und 3 neg.																																					
Continuous operating temperature	-60 ... +105 °C																																					

Environmental Testing (Environmental Conditions)		
Vibration and shock stress for rolling stock equipment	Passed	

Commercial data		
Product Group	1 (Rail Mounted Terminal Blocks)	
PU (SPU)	10 pcs	
Packaging type	Box	
Country of origin	CN	
GTIN	4050821049272	
Customs tariff number	85369095000	

Product classification		
UNSPSC	39121410	
eCl@ss 10.0	27-14-11-20	
eCl@ss 9.0	27-14-11-20	
ETIM 9.0	EC000897	
ETIM 8.0	EC000897	
ECCN	NO US CLASSIFICATION	

Environmental Product Compliance		
RoHS Compliance Status	Compliant,No Exemption	

Approvals / Certificates		
General approvals		Declarations of conformity and manufacturer's declarations
		
Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 60947	NTR NL 6882
CCA DEKRA Certification B.V.	EN 60947	2145295.01
CSA DEKRA Certification B.V.	C22.2 No. 158	70038960
UL UL International Germany GmbH	UL 1059	E45172
Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
Railway WAGO GmbH & Co. KG	-	Z00004431.000
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 885-310	



CAD/CAE-Data	
CAD data 2D/3D Models 885-310 ↓	CAE data EPLAN Data Portal 885-310 ↓ WSCAD Universe 885-310 ↓ ZUKEN Portal 885-310 ↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 DIN-rail

1.1.1.1 Mounting accessories

 Item No.: 210-198 Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored	 Item No.: 210-508 Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored	 Item No.: 210-197 Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored	 Item No.: 210-506 Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored
 Item No.: 210-114 Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored	 Item No.: 210-118 Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored	 Item No.: 210-115 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored	 Item No.: 210-112 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored
 Item No.: 210-504 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored	 Item No.: 210-113 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored	 Item No.: 210-505 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored	

1.1.2 End plate

1.1.2.1 End plate

 Item No.: 885-530 Separator plate; 2 mm thick; 157 mm wide; gray	 Item No.: 885-550 Separator plate with jumper bar recess; 2 mm thick; 157 mm wide; gray
--	---

1.1.3 Installation

1.1.3.1 Cover

 Item No.: 885-570 Cover; 1 m long; transparent
--



1.1.3.2 Empty housings



Item No.: 885-510
Empty housing; M10; gray

1.1.3.3 Mounting accessories



Item No.: 249-117
Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



Item No.: 249-197
Screwless end stop; 14 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

1.1.4 Jumper

1.1.4.1 Jumper



Item No.: 885-410
Jumper; 2-way; silver-colored



Item No.: 885-430
Jumper; 3-way; unplated; silver-colored



Item No.: 885-470
Step-down jumper; M10 to M6; silver-colored

1.1.5 Marking

1.1.5.1 Marker



Item No.: 793-5501/000-006
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; blue



Item No.: 793-5501/000-014
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; brown



Item No.: 793-5501/000-007
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; gray



Item No.: 793-5501/000-023
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; green



Item No.: 793-5501/000-017
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; light green



Item No.: 793-5501/000-012
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; orange



Item No.: 793-5501/000-005
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; red



Item No.: 793-5501/000-024
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; violet



Item No.: 793-5501
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white



Item No.: 793-5501/000-002
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow



Item No.: 793-501/000-006
WMB marking card; as card; not stretchable; plain; snap-on type; blue



Item No.: 793-501/000-007
WMB marking card; as card; not stretchable; plain; snap-on type; gray



Item No.: 793-501/000-023
WMB marking card; as card; not stretchable; plain; snap-on type; green



Item No.: 793-501/000-017
WMB marking card; as card; not stretchable; plain; snap-on type; light green



Item No.: 793-501/000-012
WMB marking card; as card; not stretchable; plain; snap-on type; orange



Item No.: 793-501/000-005
WMB marking card; as card; not stretchable; plain; snap-on type; red



Item No.: 793-501/000-024
WMB marking card; as card; not stretchable; plain; snap-on type; violet



Item No.: 793-501
WMB marking card; as card; not stretchable; plain; snap-on type; white



Item No.: 793-501/000-002
WMB marking card; as card; not stretchable; plain; snap-on type; yellow



Item No.: 2009-115/000-006
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue



Item No.: 2009-115/000-007
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray



Item No.: 2009-115/000-023
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green



Item No.: 2009-115/000-017
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green



Item No.: 2009-115/000-012
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange

1.1.5.1 Marker



Item No.: 2009-115/000-024
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet



Item No.: 2009-115
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white



Item No.: 2009-115/000-002
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

1.1.5.2 Marker carrier



Item No.: 2009-198
Adaptor; gray

1.1.5.3 Marking strip



Item No.: 2009-110
Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white