

X20(c)PS8002

Data sheet
2.40 (August 2025)



Publishing information

B&R Industrial Automation GmbH

B&R Strasse 1

5142 Eggelsberg

Austria

Telephone: +43 7748 6586-0

Fax: +43 7748 6586-26

office@br-automation.com

Disclaimer

All information in this document is current as of its creation. The contents of this document are subject to change without notice. B&R Industrial Automation GmbH assumes unlimited liability in particular for technical or editorial errors in this document only (i) in the event of gross negligence or (ii) for culpably inflicted personal injury. Beyond that, liability is excluded to the extent permitted by law. Liability in cases in which the law stipulates mandatory unlimited liability (such as product liability) remains unaffected. Liability for indirect damage, consequential damage, business interruption, loss of profit or loss of information and data is excluded, in particular for damage that is directly or indirectly attributable to the delivery, performance and use of this material.

B&R Industrial Automation GmbH notes that the software and hardware designations and brand names of the respective companies used in this document are subject to general trademark, brand or patent protection.

Hardware and software from third-party suppliers referenced in this document is subject exclusively to the respective terms of use of these third-party providers. B&R Industrial Automation GmbH assumes no liability in this regard. Any recommendations made by B&R Industrial Automation GmbH are not contractual content, but merely non-binding information for which no liability is assumed. When using hardware and software from third-party suppliers, the relevant user documentation of these third-party suppliers must additionally be consulted and, in particular, the safety guidelines and technical specifications contained therein must be observed. The compatibility of the products from B&R Industrial Automation GmbH described in this document with hardware and software from third-party suppliers is not contractual content unless this has been separately agreed in individual cases; in this respect, warranty for such compatibility is excluded in any case, and it is the sole responsibility of the customer to verify this compatibility in advance.

1248269446253-2.40

1 General information

1.1 Other applicable documents

For additional and supplementary information, see the following documents.

Other applicable documents

Document name	Title
MAX20	X20 System user's manual

Additional documentation

Document name	Title
MAREDSYS	Redundancy for control systems

1.2 Coated modules

Coated modules are X20 modules with a protective coating for the electronics component. This coating protects X20c modules from condensation and corrosive gases.

The modules' electronics are fully compatible with the corresponding X20 modules.



For simplification purposes, only images and module IDs of uncoated modules are used in this data sheet.

The coating has been certified according to the following standards:

- Condensation: BMW GS 95011-4, 2x 1 cycle
- Corrosive gas: EN 60068-2-60, method 4, exposure 21 days



1.2.1 Starting temperature

The starting temperature describes the minimum permissible ambient temperature in a voltage-free state at the time the coated module is switched on. This is permitted to be as low as -40°C. During operation, the conditions as specified in the technical data continue to apply.



Information:

It is important to absolutely ensure that there is no forced cooling by air currents in the closed control cabinet, e.g. due to the use of a fan or ventilation slots.

1.3 Order data


Order number	Short description	Figure
	System modules for X20 hub systems	
X20PS8002	X20 power supply module, for standalone hub and compact link selector	
X20cPS8002	X20 power supply module, coated, for standalone hub and compact link selector	
	Required accessories	
	Terminal blocks	
X20TB12	X20 terminal block, 12-pin, 24 VDC keyed	

Table 1: X20PS8002, X20cPS8002 - Order data

1.4 Module description

The supply module is used to supply X20 stand-alone devices. These include e.g. the X20HB8884 POWER-LINK compact link selector and the X20HB8880 stand alone hub.

- Supply for X20 stand-alone devices
- No electrical isolation between the I/O supply and the device power supply

2 Technical description

2.1 Technical data

Order number	X20PS8002		X20cPS8002
Short description			
Power supply module	24 VDC power supply module for X20 standalone devices		
General information			
Status indicators	Operating state, module status		
Diagnostics			
Module run/error	Yes, using LED status indicator		
Overload	Yes, using LED status indicator		
Power consumption ¹⁾	1.34 W		
Certifications			
CE	Yes		
UKCA	Yes		
ATEX	Zone 2, II 3G Ex nA nC IIA T5 Gc IP20, Ta (see X20 user's manual) FTZÚ 09 ATEX 0083X		
UL	cULus E115267 Industrial control equipment		
HazLoc	cCSAus 244665 Process control equipment for hazardous locations Class I, Division 2, Groups ABCD, T5		
DNV	Temperature: B (0 to 55°C) Humidity: B (up to 100%) Vibration: B (4 g) EMC: B (bridge and open deck)		
CCS	Yes		-
LR		ENV1	
KR		Yes	
ABS		Yes	
BV		EC33B Temperature: 5 - 55°C Vibration: 4 g EMC: Bridge and open deck	
KC	Yes		-
Input power supply			
Input voltage	24 VDC -15% / +20%		
Input current	Max. 0.7 A		
Fuse	Integrated, cannot be replaced		
Reverse polarity protection	Yes		
Output power supply			
Overload characteristics	Short-circuit proof, temporary overload		
Nominal output power			
Horizontal mounting orientation	7 W at 45°C and 5 W at 55°C		
Vertical mounting orientation	7 W at 40°C and 5 W at 50°C		
Electrical properties			
Electrical isolation	I/O power supply not isolated from device power supply		
Operating conditions			
Mounting orientation			
Horizontal	Yes		
Vertical	Yes		
Installation elevation above sea level			
0 to 2000 m	No limitation		
>2000 m	Reduction of ambient temperature by 0.5°C per 100 m		
Degree of protection per EN 60529	IP20		
Ambient conditions			
Temperature			
Operation			
Horizontal mounting orientation	-25 to 60°C		
Vertical mounting orientation	-25 to 50°C		
Derating	See section "Derating".		
Starting temperature	-		Yes, -40°C
Storage	-40 to 85°C		
Transport	-40 to 85°C		

Table 2: X20PS8002, X20cPS8002 - Technical data


Technical description

Order number	X20PS8002	X20cPS8002
Relative humidity		
Operation	5 to 95%, non-condensing	Up to 100%, condensing
Storage	5 to 95%, non-condensing	
Transport	5 to 95%, non-condensing	
Mechanical properties		
Note	Order 1x terminal block X20TB12 separately.	
Pitch	12.5 ^{+0.2} mm	


Table 2: X20PS8002, X20cPS8002 - Technical data

- 1) The specified values are maximum values. For examples of the exact calculation, see section "Mechanical and electrical configuration" in the X20 system user's manual.


2.2 LED status indicators

Figure	LED	Color	Status	Description
	r	Green	On	Input voltage > 19.2 V

2.3 Pinout

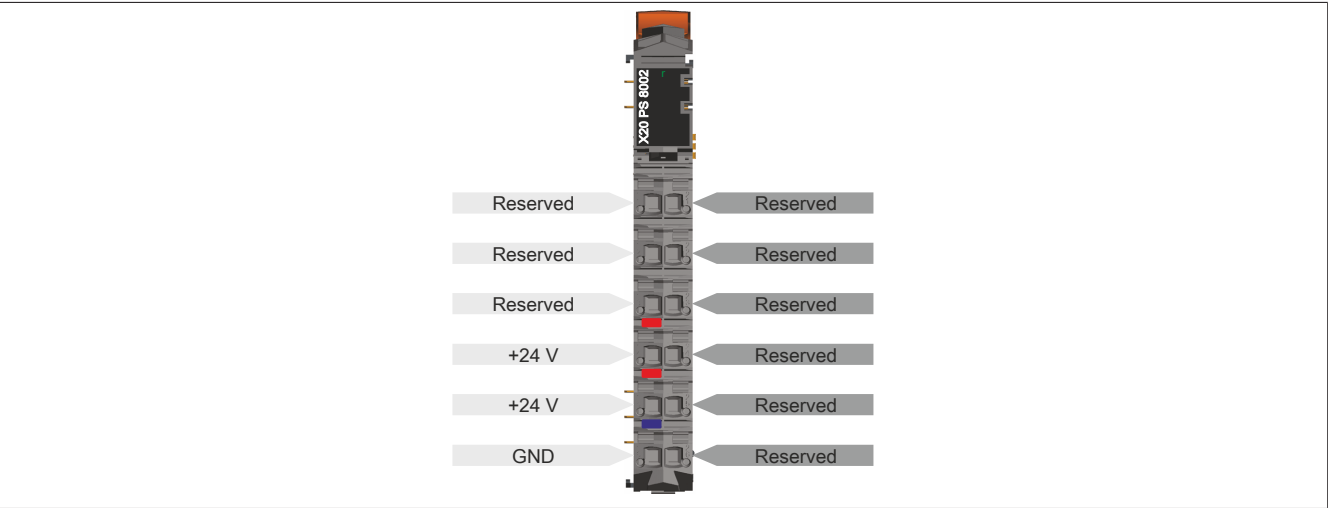

2.4 Connection example

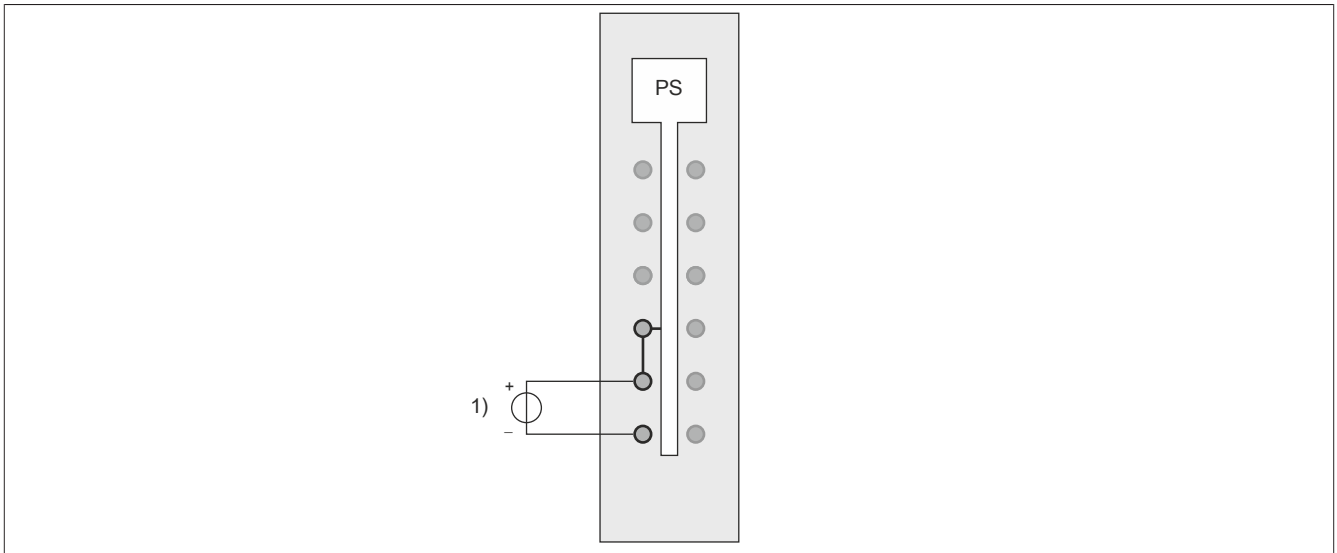

1) 24 VDC supply

2.5 Derating

The rated output current for the supply is 7 W. Derating must be taken into consideration based on mounting orientation.

