



120x120x38mm

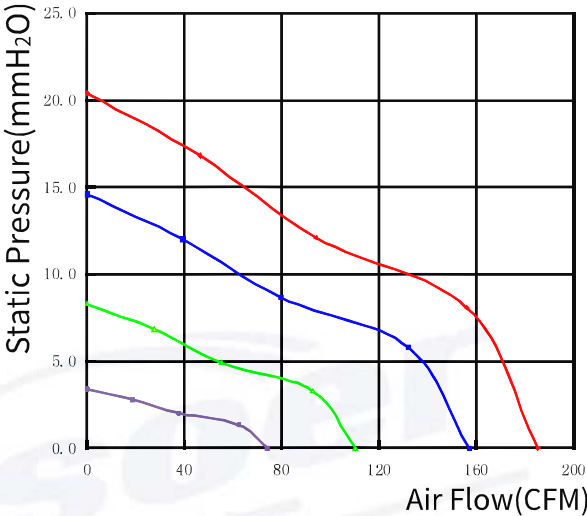

风扇尺寸 Size	120*120*38mm
电机结构 Motor	DC Brushless motor
外框 Frame	PBT UL94-V0 Reinforced Plastic
扇叶 Impeller Material	PBT UL94-V0 Reinforced Plastic
功能 Function	PWM /FG /RD optional
温度范围 Temp	-20℃ ~+70℃
防护等级 Protection	IP20, Max.IP68
接线方式 Connection	Lead wire or Terminal
预期寿命 Expected life	70000hrs/40℃

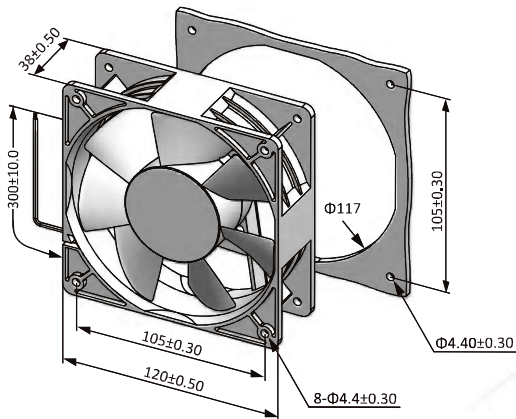

配套产品 Auxiliaries

Control Technology



TX-8006-2

【详见 P348】
Details in P348

Fan Accessories



TX120



TX9803



TX2120



TX3120

型号列表 Model	额定电压 Rated Voltage	电压范围 Voltage Range	额定电流 Rated Current	额定转速 Rated Speed	风量 Airflow	风压 Static Pressure	噪音 Noise	重量 Weight
	VDC	VDC	A	RPM	CFM	mmH2O	dB(A)	g
TX12038H12B	12	6-13.2	3.00	5000	185.2	20.4	58	300
TX12038M12B		6-13.2	2.00	4000	157.0	14.6	52	
TX12038L12B		6-13.2	1.00	3000	110.1	8.3	44	
TX12038X12B		6-13.2	0.50	2000	74.0	3.4	35	
TX12038H24B	24	12-27.6	2.00	5000	185.2	20.4	58	
TX12038M24B		12-27.6	1.00	4000	157.0	14.6	52	
TX12038L24B		12-27.6	0.60	3000	110.1	8.3	44	
TX12038X24B		12-27.6	0.30	2000	74.0	3.4	35	
TX12038H48B	48	24-55.2	0.60	5000	185.2	20.4	58	
TX12038M48B		24-55.2	0.40	4000	157.0	14.6	52	
TX12038L48B		24-55.2	0.30	3000	110.1	8.3	44	
TX12038X48B		24-55.2	0.20	2000	74.0	3.4	35	